

Rev. FZF-01 (Anzeige DIAGNOSTIC)
SN 30500 (Anzeige Add. Utilities)

MAN-00220A-000
Rev. 1.1
December 17, 1993

CQD-220A/223A

High Performance Q-bus
SCSI-2 Smart Host Adapter
User's Manual



EUROLOGIC SYSTEMS LIMITED
49 Bracken Road, Sandyford Industrial Estate
Dublin 18, Ireland
Telephone +353 - 1- 2958366
Facsimile +353 - 1- 2958433, 2959488 / 9

eurologic



FOR A PARTICULAR PURPOSE, AND ALL SUCH OTHER WARRANTIES ARE HEREBY DISCLAIMED AND EXCLUDED BY CMD. THESE STANDARD EXPRESS WARRANTIES ARE IN LIEU OF ALL OBLIGATIONS OR LIABILITIES ON THE PART OF CMD FOR DAMAGES, INCLUDING BUT NOT LIMITED TO SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THE PRODUCT.

Return and Repair Policy

Period

The following period is from the date of shipment:

CMD Host Adapter	One year
Cable	90 days
Drives	Manufacturer's

Return For Credit

The allowable period of return for credit from the date of shipment is as follows

CMD Host Adapter	Less than 30 days
Cable	Less than 30 days
Drives	Not applicable

Return for Repair

CMD Host Adapter

All prices quoted in this Return and Repair policy statement are subject to change at any time.

In Warranty (Less than 1 year) CMD offers a *15 working day turnaround repair service* at the cost of parts only. Defective boards will be repaired and returned to the customer within 15 working days from that date that CMD receives the board.
CMD also offers two *in-warranty 24 hour expediting services*:
24 Hour Turnaround Loaner Service: Under this policy, CMD will ship a loaner in 24 hours during regular working days to the customer for a charge of \$100.00 per loaner. Upon receiving the loaner, customer must return the defective board to CMD within seven (7) days for repair. CMD will repair the defective board and return the board to the customer. Customer must then return the loaner in seven (7) days after the receipt of the repaired board. Approval for loaner service is based on credit verification.
24 Hour Turnaround Swap Service: In the case that the defective board is within the first three (3) months of the, CMD, at its own option, offers a 24 hour turnaround swap service. CMD will ship the same model of the board to customer within 24 hours during working days in exchange for the defective board. CMD will swap with a new board if board is not functional upon arrival. For all other cases, swap will occur with either a new or refurbished board for a charge of \$200.00. CMD does not offer swap services for boards that are purchased more than six months from the date of shipment. Customer is responsible for returning the defective board to CMD within seven (7) days after receipt of the swapped board. The remaining period shall apply to the repaired or swapped board.

Out of Warranty (more than 1 year) CMD offers a *15 working day turnaround repair service* at a rate of \$300.00 plus parts and freight for all out-of-warranty Host Adapters. CMD will repair and return defective controllers within 15 working days from the date that CMD receives the controller. CMD also offers an *Out-of-Warranty 24 Hour Turnaround Loaner Service*: Under this policy, CMD will ship the same model loaner in the 24 hour time frame of working days to customer for an additional charge of \$100.00 plus freight per loaner. The loaner is for use by the customer during the period that the defective board is being repaired. Customer is responsible for returning the defective board to CMD within seven days after the receipt of loaner and returning the loaner in seven (7) days once the defective board is repaired and received. The approval of the loaner service is at CMD's option and based upon customer credit verification.
CMD will extend for a period of six (6) months on any out-of-warranty repaired board.

Cable

In-Warranty (90 days)	Free swap
Out-of-Warranty (90 days)	Not applicable

Drives

In-Warranty (per manufacturer)	Manufacturer charge only.
Out-of-Warranty (per manufacturer)	Manufacturer charge plus \$100 CMD handling.

Return for Upgrade / Update

CMD Host Adapter

In Warranty (less than 1 year)	<p>CMD offers a <i>15 working day turnaround different function upgrade service</i> for boards that can be upgraded to a higher function; and a <i>free 15 working day turnaround ECO Field Upgrade</i> for all its boards. CMD will <i>upgrade</i> the hardware of its board to a higher function for a charge of the difference of list prices of the original and upgraded functions. CMD will also update its board to its latest firmware release at no charge to the customer. Boards will be upgraded/updated and returned to the customer within 15 working days from the date that CMD receives the board.</p> <p>CMD also offers <i>24 hour turnaround loaner service</i> as stated in "Return for Repair." The remaining period shall apply to the updated board. For upgraded boards, CMD will extend for a period of six months.</p>
-----------------------------------	---

Out of Warranty (More than 1 year)	<p>CMD offers a <i>15 working day turnaround different function upgrade service</i> for boards that can be upgraded to a higher function at a charge of the difference of list prices of two functions. Boards will be upgraded/updated and returned to customer within 15 working days from the date that CMD receives the board.</p> <p>CMD also offers <i>24 hours turnaround Loaner Service</i> as stated in "Return for Repair." There will be no extension for same function firmware update. For different function Hardware upgrade, CMD will extend for a period of six (6) months.</p>
---------------------------------------	--

Drives	Same as in "Return for Repair."
--------	---------------------------------

Shipping Charges

The following shipping charges apply to all REPAIR, SWAP, LOANER, and UPGRADE UNITS.

In Warranty

Domestic	Freight from CMD to customer is to be paid by CMD; freight from customer to CMD is to be paid by customer.
International	All fees are to be paid by customer (including custom duty and broker fees).

Out of Warranty

Domestic	All fees are to be paid by customer.
International	All fees are to be paid by customer (including custom duty and broker fees).

General Conditions

All goods returned to CMD including returns for credit, swap returns, loaner returns, and evaluation returns shall remain in good condition. Any damage or alteration done by the customer will result in a rejection or additional charge to the customer.

A customer who receives a board that is defective upon arrival must contact CMD Technical Support and obtain authorization before returning the board for repair or replacement. CMD Sales personnel must be consulted for authorization of returned goods for credit and/or evaluation.

Preface

Rev. 1.1 of the CQD-220A/223A User's Manual includes the following changes from the previous revision.

- ◆ SW3-10, which had been documented in the previous revision as reserved, now determines whether the CQD-220A/M/T controls disk devices only or tape devices only. This change is reflected in chapters 2 and 3 and appendix C.
- ◆ All references to /T, /M, /TMS, /TMJ and /TMP models have been removed from the manual. Users who desire the features formerly offered by the /TMS, /TMJ and /TMP models should use the CQD-420 controller.
- ◆ All references to SCSI Library Manager and Generic SCSI Adapter have been removed from the manual.

Table of Contents

1 Introduction

How to Use this Manual	1-1
Conventions	1-2

2 Features and Specifications

Features	2-1
LED Indicators	2-3
Special Features	2-4
Multi-Hosting	2-4
Partitioning	2-4
Tape Monitor Utility	2-4
SCSIformat ON-LINE	2-5
Specifications	2-5

3 Installation

Determining CSR Address	3-1
Hardware Configuration	3-3
CSR Address Selection	3-3
Tape/Disk Selection on the CQD-220A/M/T	3-6
Disk Auto Boot Selection	3-6
18- or 22-Bit Address Selection	3-6
Interrupt Level Selection	3-7
Block Mode DMA	3-7
Adaptive DMA	3-7
DMA Dwell Time	3-7
Adaptive DMA Dwell Time	3-8
Tape Fast Search Option	3-8
Sync/Async Mode Selection	3-9

Tape Monitor Utility and SCSIformat ON-LINE	3-9
Single-ended Mode Selection	3-10
Eprom Size	3-10
Wait State for Eprom Cycles	3-11
Installation	3-11
SCSI Host Adapter ID Selection	3-12
SCSI ID for Target Devices	3-12
CQD-220A Mounting Slot Selection	3-12
SCSI Bus Cabling	3-13
SCSI Bus Termination	3-13
SCSI Bus Terminator Power	3-13
Installation Procedures	3-14
4 Setup	
On-Board Utility	4-1
Accessing the Utility Through the LSI or VAX System	4-1
Accessing the Utility Through the RS-232 Port	4-5
Changing LUN Offset	4-6
Formatting the Drive	4-7
Qualifying the Drive	4-8
Manually Replacing Bad Sectors	4-8
Additional Utilities	4-9
Displaying SCSI Device and Setting Up Configuration	4-9
Sending SCSI Commands To The Device	4-15
Testing SCSI Device	4-15
Formatting RCT Block	4-16
Completing Utility Functions	4-17
Unit Numbering For Devices	4-17
Multi-Hosting Configuration	4-20
Partitioning Configuration	4-21
VMS Configuration	4-25
ULTRIX Configuration	4-25
CQD-220A/M/T (tape)	4-25
CQD-220A/M/T (disk)	4-26
CQD-220A/TM	4-27
5 SCSI Basics	
SCSI Glossary	5-1
SCSI Commands	5-2

SCSI Status	5-3
SCSI Messages	5-4
SCSI Single-Ended Signals	5-4
Single-Ended Non-Shielded Connector	5-4
Single-Ended Shielded Connector	5-6
A Supported Devices and Operating Systems	
SCSI Devices	A-1
Magnetic disk drives supported—/M/T (disk) and /TM	A-1
Magneto-optical drives supported—/M/T (disk) and /TM	A-1
Removeable Disk Systems—/M/T (disk) and /TM	A-2
RAM Disks supported—/M/T (disk) and /TM	A-2
CD-ROM drives supported—/M/T (disk) and /TM	A-2
RAID systems and controllers supported—/M/T (disk) and /TM	A-2
Tape drives supported—M/T (tape) and /TM	A-2
3480-type tape drives supported—M/T (tape) and /TM	A-3
9-track tape drives supported—M/T (tape) and /TM	A-3
Operating Systems	A-3
B Troubleshooting	
VMS Analyze/Error Utility	B-1
Cables	B-3
LED Indicators	B-3
CMD Technical Support	B-4
C Jumper Settings	
Pin Assignments	C-1
CSR Address Selections	C-5
D VMS SYSGEN Connect Statement	

List of Figures

2 Features and Specifications

Figure 2-1: LED Indicators 2-3

3 Installation

Figure 3-1: Example of SYSGEN Utility 3-3

Figure 3-2: Jumper block locations 3-5

Figure 3-3: Terminator Resistor Location 3-10

Figure 3-4: Eprom setting 3-11

Figure 3-5: CQD-220A non-shielded cable connection 3-15

Figure 3-6: CQD-223A shielded connection 3-15

Figure 3-7: SCSI ID and Cabling 3-16

4 Setup

Figure 4-1: Utility CSR address 4-4

Figure 4-2: Main Menu 4-4

Figure 4-3: CQD-223A RS-232 Port 4-5

Figure 4-4: CQD-220A RS-232 Port 4-5

Figure 4-5: SCSI Host Adapter Utility 4-6

Figure 4-6: Utility Sub-menu 4-9

Figure 4-7: Current configuration, default 4-10

Figure 4-8: Configuration change 4-11

Figure 4-9: SCSI host adapter ID change 4-14

Figure 4-10: Disk and Tape Configuration Change 4-14

Figure 4-11: Current configuration 4-22

Figure 4-12: Configuration change 4-23

Figure 4-13: Partitioning example 4-23

Figure 4-14: Current configuration 4-24

5 SCSI Basics

Figure 5-1: SCSI device non-shielded connector 5-4

Figure 5-2: SCSI device shielded connector 5-6

C Jumper Settings

Figure C-1: Pin Locations for J2 (CQD-220A) and J3 C-1

Figure C-2: Pin Locations for J2B (CQD-223A) C-1

D VMS SYSGEN Connect Statement

Figure D-1: SYSGEN Config File D-2

Figure D-2: Unibus Address D-3

List of Tables

2 Features and Specifications

Table 2-1: CQD-220A Models	2-2
Table 2-2: LED Indicators	2-3
Table 2-3: Special Feature Support List	2-4
Table 2-4: Controller Specifications	2-5
Table 2-5: CSR Addresses	2-6

3 Installation

Table 3-1: CQD-220A CSR jumper settings for disk	3-4
Table 3-2: CQD-220A CSR jumper settings for tape	3-4
Table 3-3: CQD-220A/M/T Disk/Tape Selection	3-6
Table 3-4: Disk Auto Boot Selection	3-6
Table 3-5: Block Mode DMA	3-7
Table 3-6: Adaptive DMA	3-7
Table 3-7: DMA Dwell Time	3-8
Table 3-8: Adaptive DMA Dwell Time	3-8
Table 3-9: Tape Fast Search Option	3-9
Table 3-10: Sync/Async Mode Selection	3-9
Table 3-11: Tape Monitor Utility and SCSIformat ON-LINE Options	3-10
Table 3-12: Eprom Size Selection	3-11
Table 3-13: Wait State for Eprom Cycles	3-11
Table 3-14: Device ID Selection	3-12
Table 3-15: Terminator Power Option	3-14

4 Setup

Table 4-1: Disk CSR Addresses Plus 2 Configurations	4-3
Table 4-2: Tape CSR Addresses Plus 2 Configurations	4-3
Table 4-3: Default for Unit Numbers	4-18
Table 4-4: Host Adapter ID Selection	4-20

5 SCSI Basics

Table 5-1: SCSI Commands	5-2
Table 5-2: SCSI Commands	5-3
Table 5-3: SCSI Status	5-3
Table 5-4: SCSI Messages	5-4
Table 5-5: Single-Ended Non-Shielded Connector Pin Assignments (J1)	5-5
Table 5-6: Single-Ended Shielded Connector Pin Assignments (J1)	5-7

A Supported Devices and Operating Systems

Table A-1: Operating Systems Supported by CQD-220A/223A	A-3
---	-----

C Jumper Settings

Table C-1: Pin Assignments for RS-232 Utility Interface	C-2
Table C-2: Host Adapter ID Selections	C-3
Table C-3: Switch Settings	C-3
Table C-4: CQD-220A Jumper Pin Assignments	C-4
Table C-5: CQD-220A/M/T (disk only) CSR Addresses	C-5
Table C-6: CQD-220A/M/T (tape only) CSR Address Selections	C-6
Table C-7: CQD-220A/TM CSR Addresses (Disk)	C-7
Table C-8: CQD-220A/TM CSR Address Selections (Tape)	C-8

This User's Guide explains the basics of your CQD-220A™. It includes information on setting up and configuring the system and the CQD-220A for use.

How to Use this Manual

This guide has five chapters and four appendices. Each chapter explains a different aspect of preparing your CQD-220A for use. You may refer to the appendices for further configuration and troubleshooting information. The following descriptions summarize each section.

Chapter 1: Introduction explains the purpose of this guide and details the conventions used.

Chapter 2: CQD-220A Features describes the CQD-220A and details its features, special features, and specifications.

Chapter 3: Installation describes hardware configuration and installation procedures for the CQD-220A.

Chapter 4: Setup describes setting up and configuring the CQD-220A and your system for use; this chapter includes Multi-hosting, Partitioning, VMS®, and ULTRIX® set up and configurations.

Chapter 5: SCSI Basics lists a glossary on SCSI terms, SCSI status and command codes for the CQD-220A.

Appendix A: Supported Devices and Operating Systems lists the SCSI devices and operating systems compatible with the CQD-220A.

Appendix B: Troubleshooting gives some troubleshooting guidelines for the CQD-220A.

Appendix C: Jumper Settings lists the jumpers settings, pin assignments, and the CSR addresses for the present revision of the CQD-220A.

Appendix D: VMS SYSGEN Connect Statement describes the proper use of the VMS SYSGEN Connect Statement.

Conventions

The following conventions are used in the CQD-220A User's Guide.

Keycaps—Characters in square brackets represent keys on your keyboard. For example, "Press **[ENTER]**" means press the **[ENTER]** key. When two or more keys are joined by a plus sign (+), press those keys at the same time.

Commands—Italics text represents a command that can be used on a system, such *show dev du*.

NOTE Sometimes italics will be used for emphasis; at this time no action is necessary; for example, *do not* remove jumper shunt W3.

Entering Text or Commands on Screen—Text or commands that must be entered on screen will be in italics and bold as ***show dev du***; be sure to enter the text or command and press **[ENTER]**.

Features and Specifications

The CQD-220A is an intelligent, high-performance, quad-wide, Q-bus single-ended, synchronous/asynchronous (sync/async) SCSI-2 Host Adapter. The following sections describe the CQD-220A in more detail.

Features

The CQD-220A is fully compatible with the DEC Mass Storage Control Protocol (MSCP) and Tape Mass Storage Control protocol (TMSCP).

The CQD-220A employs a 286 processor to provide faster clock rate operation and ASIC technology to reduce chip counts, which enhances the reliability of the adapter while reducing power consumption.

The CQD-220A has one SCSI port which supports single-ended SCSI channels. Single-ended SCSI channel cables may be as long as 20 feet.

The CQD-220A can be used with the LSI-11/23®, PDP-11/23+, Micro-PDP-11/53®, 11/73, 11/83, 11/93, MicroVAX® II, and MicroVAX III, VAX 4000® and DECsystem® 5400 systems. It supports RT-11®, TSX®, DSM-11®, ISM-11®, RSX®, RSTS®, VMS, UNIX®, ULTRIX, and other operating systems which use DU/TU drivers.

The CQD-220A has Adaptive Dwell for Q-bus; active termination for single-ended channel to improve SCSI bus noise immunity; and polyswitch (self-healing) fuses that do not need to be replaced.

The CQD-220A features 18-bit or 22-bit Q-bus addressing, block mode and adaptive DMA transfer, virtual data buffer, command queuing, dynamic defect management, standard SCSI bus arbitration, disconnect and reconnect ca-

pability, multiple-host capability, and all required SCSI commands. Up to seven synchronous, asynchronous or mixed SCSI devices can be connected to the CQD-220A with SCSI bus data transfer rate up to 10-MB/sec in synchronous mode and 7-MB/sec in asynchronous mode.

The CQD-220A supports a variety of Sync/Async SCSI devices including magnetic disk, magnetic tape and optical disk drives. Table 2-1 lists the different models of the CQD-220A and their features.

Table 2-1 CQD-220A Models

CQD-220A/TM	Supports disk and tape drives simultaneously
CQD-220A/M/T	Replaces /M and /T models. Supports disk drives only when SW3-10 is "OFF" Supports tape drives only when SW3-10 is "ON"
CQD-223A	Combines a MicroVAX III and VAX4000 adapter kit with any of the above CQD-220A models. A shielded SCSI cable (with shielded connectors) is required to connect the CQD-223A to SCSI devices.

NOTE Unless otherwise specified, the CQD-220A will represent all of the model variations throughout this manual.

The CQD-220A/M/T (disk) and CQD-220A/TM have an On-Board Utility for you to format and configure the SCSI devices, scan bad blocks and replace them automatically.

For LSI systems only, CQD-220A/M/T (disk) and the CQD-220A/TM contain a selectable bootstrap option which can boot up the system on power up or reset. The CQD-220A/M/T (tape) and CQD-220A/TM have an On-Board Utility for you to boot up the system or exercise the tape drives.

The CQD-220A has an on-board non-volatile RAM (NOVRAM) to store the Logical Unit Number (LUN) Offset and other important information of the controller configuration.

The CQD-220A SCSI host adapter provides you with a 10 pin connector (J2) for the On-Board RS-232 Utility. The CQD-223A provides you with a DEC compatible RJ-11/Modified Module 423 Jack (MMJ) for accessing the On-Board RS-232 Utility. See Appendix C for pin assignments.

LED Indicators

The CQD-220A has two LED modules in the front of the board. The LED modules contain two LED's and are labeled DS1 and DS2 (see Figure 2-1).

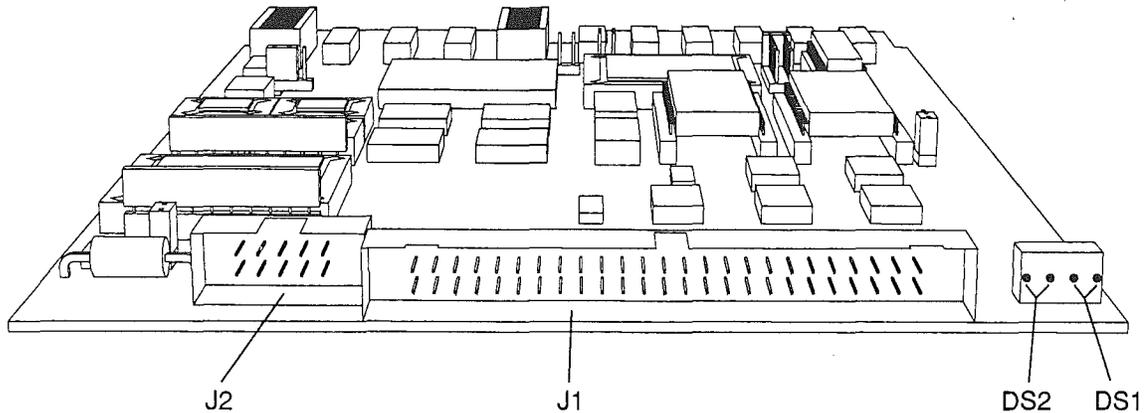


Figure 2-1: LED Indicators

Table 2-2 lists the LED indicators for CQD-220A.

Table 2-2 LED Indicators

LED	Color	Location	Indication
DS1	Green	second from right	Power-up OK and activity indicator. Upon power up, this LED is turned on when the CQD-220A succeeds in the self-diagnostic testing. During normal controller operation, this LED will blink to show controller activity.
	Red	far right	Error condition occurred
DS2	Green	second from left	Terminator power pin is supplied with power.
	Green	far left	Single-ended SCSI channel enabled when on.

Special Features

The CMD CQD-220A controller provides special features, such as multi-hosting, partitioning, Tape Monitor Utility(TMU), and on-line formatting (FMT). Table 2-3 lists the special features.

Table 2-3 Special Feature Support List

Model	Multi-hosting	Partitioning	TMU	FMT
/M/T (tape)	No*	No	Yes	No
/M/T (disk)	Yes	Yes	No	Yes
/TM	Yes*	Yes	Yes	Yes

*Two hosts cannot share tape drives at the same time.

Multi-Hosting

CMD's multi-host solution can support disk, tape, and optical devices including jukeboxes. It gives you the ability to completely share an array of disks and tapes between multiple VAX systems running VAX cluster software. Multi-hosting configuration instructions are given in Chapter 4. Refer to Appendix A for supported disk and tape devices.

Partitioning

CQD-220A gives you the ability to partition devices. Partitioning makes one physical device appear as two or four equal sized logical devices. Partitioning is used for operating systems that do not support large devices such as RT-11. Partitioning configuration instructions are given in Chapter 4.

Tape Monitor Utility

The Tape Monitor Utility™ (TMU) is an application software that works exclusively with CMD SCSI host adapters as an optional feature for VAX/VMS systems.

This Tape Monitor Utility™ displays the tape drive vendor identification, drive firmware revision, the remaining tape capacity, percentage/number of rewrites during writes or percentage/number of ECC retrys during reads (see manufacturer's documentation for returns whether percentages or numbers), and current tape operations such as read, write, write file mark, space, rewind, etc. You can install multiple CQD-220A's and tape drives in one site and observe all tape activity from any VAX terminal locally or across the net-

work without any additional add-in hardware. You can also open a file to log all the information during unattended backup.

To install the Tape Monitor Utility, follow the instructions given in the accompanying CMD Tape Monitor Utility User's Manual part number MAN-000TMU-000 and install jumper shunt as given in Chapter 3, subsection "Tape Monitor Utility and SCSIformat ON-LINE."

SCSIformat ON-LINE

The SCSIformat ON-LINE (FMT) is an application software that works exclusively with CMD SCSI host adapters as an optional feature for VAX/VMS systems. This SCSIformat ON-LINE allows you to format the disk drives without interfering with the other devices on the SCSI bus. To install SCSIformat ON-LINE follow the instructions given in the accompanying SCSIformat ON-LINE User's Manual and install jumper shunt as given in Chapter 3, subsection "Tape Monitor Utility and SCSIformat ON-LINE."

Specifications

Table 2-4 lists the controller specifications for the CQD-220A.

Table 2-4 Controller Specifications

Emulation	MSCP (DU driver) / TMSCP (TU driver)
Bus Interface	Standard MicroVAX or LSI-11 Q-bus
Addressing	22-bit Addressing
Interrupt Priority	Level 4
Interrupt Vector	Software programmable
Transfer Mode	Normal or block mode DMA
DMA Dwell	Adaptive Dwell
Command Queuing	Commands with optimized seek
Data Buffer Capacity	Virtual data buffer (infinite size)
Bootstrap	Auto bootstrap or utility bootstrap
Defect Management	Dynamic defect management
Software Supported	All standard DEC operating systems
Multiple-Hosting	Support multiple-hosting for disks, optical drives and tapes.
Formatting	On board format and bad block replacement (ISO standard for optical erasable disk format)
Partitioning	2 or 4 equally divided partitions for disk drives
Optional Software	Tape Monitor Utility (TMU), SCSIformat ON-LINE (FMT)
LED Indicators	Self test, error conditions
Peripheral Interface	Small Computer System Interface (SCSI-2)

SCSI Transfer Rate:	4.8-MB/sec in Synchronous mode 3-MB/sec in Asynchronous mode
SCSI Bus Parity	Odd parity
Devices Supported	Up to seven SCSI devices CQD-220A/M/T disk or tape drives CQD-220A/TM disk and tape drives (default is four disks and three tapes)
SCSI Driver/Receiver	Single-ended
SCSI Fuse	Self-healing, 1.5 A polyfuse
SCSI Termination	Single-ended=active termination (removable)
SCSI Cable Length	Single-ended, up to 20 feet (6 meters)
Operating Temperature	5° C to 50° C
Relative Humidity	10% to 90%, Non-condensing
Power Requirement	5V DC, 1.5 A

Table 2-5 lists the CSR addresses for the CQD-220A. For complete CSR addresses, see Chapter 3 and Appendix C.

Table 2-5 CSR Addresses

CQD-220A/TM (disk) IC P220A01A (U30)	772150, 760334, 760354, 760374, 760340, 760344, 760350, 760360 and 23 additional CSR addresses
CQD-220A/TM (tape) IC P220A01A (U30)	774500, 760404, 760444, 760504, 760544, 760410, 760450, 760454 and 23 additional CSR addresses
CQD-220A/M/T (disk) IC P220A08A (U30) SW3-10 "OFF"	772150, 760334, 760354, 760374, 760340, 760344, 760350, 760360 and 23 additional CSR addresses
CQD-220A/M/T (tape) IC P220A08A (U30) SW3-10 "ON"	774500, 760404, 760444, 760504, 760544, 760410, 760450, 760454 and 7 additional CSR addresses

This chapter instructs you on configuring the CQD-220A and installing it into the system. Follow the instructions in this chapter in the order presented.

Determining CSR Address

Before you install the CQD-220A SCSI host adapter under the VMS operating system you must determine the Control and Status Register (CSR) address for the CQD-220A.

One CSR address is required for the CQD-220A/M/T. Two CSR addresses are required for the CQD-220A/TM. The following procedure shows one method of determining the new CSR address to be used for the CQD-220A.

WARNING Do not install the new CQD-220A in the system at this time.

- 1 Boot the VMS system and log into the system manager account.
- 2 At the DCL \$ prompt, enter *MC SYSGEN*.
- 3 At the prompt *SYSGEN*, enter *SHOW/CONFIG*. The SYSGEN Utility will display all the device controllers installed in the system and their corresponding CSR addresses and vectors. Make a note of this list.
- 4 At the prompt *SYSGEN*, enter *CONFIG*. This will give you the *DEVICE* prompt

- 5 At the prompt *DEVICE*, enter the following for your CQD-220A:

?
u
enter *UDA*, *X*
and *TU81*, *Y*

where

X is the number of installed *UDA* type controllers plus 1 (for the new one being added).

Y is the number of installed *TU81* type controllers plus 1 (for the new one being added).

?
o
NOTE Enter all devices on the Q-bus, not just the new device being added at present.

- 6 At the prompt *DEVICE*, enter [CTRL] + Z. The SYSGEN Utility will display the CSR addresses for all the controllers. Make sure that no other vectors or CSR addresses have changed; if they have, make the appropriate changes to the devices.

The VMS mnemonic for MSCP disk controllers are PUA, PUB, PUC, etc. The VMS mnemonic for TMSCP tape controllers are PTA, PTB, PTC, etc. For other mnemonics, refer to VMS system manager's guide.

Use the corresponding CSR address to configure the CSR jumper settings of the CQD-220A (see "CSR Address Selection").

- 7 At the prompt *SYSGEN*, enter [CTRL] + Z to exit the SYSGEN Utility.

NOTE VMS will automatically program the CQD-220A's interrupt vector register to match the vector assigned by the system. The vectors of DHV11 or other controllers might change when the CQD-220A is added to the system; see manufacturer's documentation to configure vectors and device CSR addresses if hardware selectable.

The example in Figure 3-1 explains the SYSGEN Utility procedure for installing the CQD-220A in VMS system. In this example, the CSR addresses of PUB and PTB should be used to configure the CSR jumpers of the CQD-220A. In the example, notice the CSR and vector changes for the DHV11.

```

$ MC SYSGEN
SYSGEN> SHOW/CONFIG

System CSR and VECTOR on 2-JUN-1989 04:10:43.30

Name: PUA Units:1 Nexus:0 (UBA) CSR:772150 Vector:774 Vector2:0
Name: PTA Units:1 Nexus:0 (UBA) CSR:774500 Vector:260 Vector2:0
Name: TXA Units:16 Nexus:0 (UBA) CSR:760440 Vector:300 Vector2:304

SYSGEN> CONFIG
DEVICE> UDA,2
DEVICE> TU81,2
DEVICE> DHV11,1
DEVICE> ^Z

Device: UDA      Name: PUA      CSR: 772150    Vector:154     Support: Y
Device: TU81     Name: PTA      CSR: 774500    Vector:260     Support: Y
Device: UDA      Name: PUB      CSR: 760334*   Vector:300*    Support: Y
Device: TU81     Name: PTB      CSR: 760404*   Vector:304*    Support: Y
Device: DHV11    Name: TXA      CSR: 760500    Vector:310*    Support: Y

SYSGEN> ^Z
$

```

Figure 3-1: Example of SYSGEN Utility

Hardware Configuration

The CQD-220A's default switch and jumper settings should satisfy most users. However, there are two configuration issues that require careful attention and may entail the changing of certain default settings. The first issue, which all users must face, is the selection of a CSR address. The second issue applies to owners of the CQD-220A/M/T model, and involves the setting of a single switch to determine whether the controller will work with disks or tapes—if you fail to set this switch properly, your controller will not work.

CSR Address Selection

The CQD-220A jumpers allow you to select different CSR addresses. If you require other CSR addresses than listed, consult CMD Technology.

Each CQD-220A model supports 31 CSR addresses. The Pal in the U30 socket determines whether these CSR addresses apply to disk or tape. With IC P220A01A in U30, the CQD-220A/TM will support disk and tape CSR addresses. With IC P220A08A in U30, the CQD-220A/M/T will support disk or tape CSR addresses, depending on the the way SW3-10 is set: "OFF" for disks and "ON" for tapes. Refer to Appendix C for a complete listing of CSR jumper settings.

WARNING Be sure to wear anti-static wrist straps or equivalent to protect the CQD-220A from electro-static damage.

Table 3-1 CQD-220A CSR jumper settings for disk

Address	LSI-11	MicroVAX	SW2 -1	SW2 -2	SW2 -3	SW2 -4	SW2 -5
1	17772150	20001468	ON	ON	ON	ON	ON
2	17760334	200000DC	ON	ON	ON	ON	OFF
3	17760354	200000EC	ON	ON	ON	OFF	ON
4	17760374	200000FC	ON	ON	ON	OFF	OFF
5	17760340	200000E0	ON	ON	OFF	ON	ON
6	17760344	200000E4	ON	ON	OFF	ON	OFF
7	17760350	200000E8	ON	ON	OFF	OFF	ON
8	17760360	200000F0	ON	ON	OFF	OFF	OFF
Disable when no disk devices installed			OFF	OFF	OFF	OFF	OFF

Set SW3-10 on the CQD-220A/M/T to "OFF" for disk devices

Table 3-2 CQD-220A CSR jumper settings for tape

Address	LSI-11	MicroVAX	SW2 -6	SW2 -7	SW2 -8	SW2 -9	SW2-10
1	17774500	20001940	ON	ON	ON	ON	ON
2	17760404	20000104	ON	ON	ON	ON	OFF
3	17760444	20000124	ON	ON	ON	OFF	ON
4	17760504	20000144	ON	ON	ON	OFF	OFF
5	17760544	20000164	ON	ON	OFF	ON	ON
6	17760410	20000108	ON	ON	OFF	ON	OFF
7	17760450	20000128	ON	ON	OFF	OFF	ON
8	17760454	2000012C	ON	ON	OFF	OFF	OFF
Disable when no tape devices installed			OFF	OFF	OFF	OFF	OFF

Set SW3-10 on the CQD-220A/M/T to "ON" for tape devices

Tape/Disk Selection on the CQD-220A/M/T

The CQD220A/M/T model will support up to 7 disk devices or up to 7 tape devices. It will not support a mixture of disk and tape devices. At power up, the controller checks the value of SW3-10 and configures itself accordingly for disks or tapes. If the setting of SW3-10 does not agree with the configuration stored in the non-volatile RAM (NOVRAM), the controller replaces the NOVRAM values with the factory defaults for the device specified by SW3-10. Table Table 3-3 lists the settings for SW3-10.

Table 3-3 CQD-220A/M/T Disk/Tape Selection

SW3-10	
OFF	Supports disk devices only (F)
ON	Supports tape devices only

Note that (F) means factory setting.

Disk Auto Boot Selection

Disk Auto-Boot Selection is used for the LSI-11 processors only. The CQD-220A/M/T (disk) or CQD-220A/TM may be set to provide an auto-bootstrap at 773000 or 771000 on power up or whenever the "boot" switch is pressed. The CQD-220A/M/T (disk) will automatically boot only if the controller CSR is set to the standard address, 772150. Disk drive 0 will be bootstrapped. Table 3-4 lists Disk Auto Boot Selections.

Table 3-4 Disk Auto Boot Selection

W6-6	W6-7	
OUT	OUT	Auto-Bootstrap disabled (F)
IN	OUT	Auto-Bootstrap address = 775000
OUT	IN	Auto-Bootstrap address = 773000
IN	IN	Auto-Bootstrap address = 771000

Note that (F) means factory setting.

If there is an existing bootstrap ROM at 773000, you must set the CQD-220A auto-bootstrap address at 771000. To boot the CQD-220A, type 771000G from ODT instead of the normal 773000G.

18- or 22-Bit Address Selection

The CQD-220A is factory configured to 22-bit addressing which is used in systems with the MicroVAX, LSI-11/23/53/73/83/93 and Mentec M80, M90, M100 processors. 22-bit addressing can cause problems if used with an 18-bit

processor such as the LSI-11/2. In this case, configure the board to 18-bit by cutting the etch between W8 1-2 (see Figure 3-2 for jumper block locations).

Interrupt Level Selection

Interrupt Level Selection allows you to select the priority of interrupting the CPU for MSCP devices. The CQD-220A is shipped with interrupt level 4 selected; this is standard interrupt priority for MSCP devices.

Block Mode DMA

Block Mode DMA allows the CQD-220A to transfer data in blocks rather than single word per memory address assertion. In a Block Mode Direct Memory Access (DMA) transfer, the starting memory address is asserted, followed by data for that address, and data for consecutive addresses. Because the assertion of the address for other data words are eliminated, higher data throughput can be achieved. The CQD-220A is shipped with Block Mode DMA enabled as shown in Table 3-5.

Table 3-5 **Block Mode DMA**

W6-5	OUT	Block mode DMA enabled (F)
W6-5	IN	Block mode DMA disabled

Note that (F) means factory setting.

Adaptive DMA

Adaptive DMA allows the CQD-220A to release the Q-bus after a block (eight words) transfer if other DMA devices assert DMA request. Otherwise, the CQD-220A will continue the DMA transfer for an additional block then release the Q-bus. Adaptive DMA is implemented to utilize the Q-bus bandwidth. The CQD-220A is shipped with Adaptive DMA enabled as shown in Table 3-6.

Table 3-6 **Adaptive DMA**

W6-1	OUT	Adaptive DMA enabled (F)
W6-1	IN	Adaptive DMA disabled

Note that (F) means factory setting.

DMA Dwell Time

DMA Dwell Time is the relaxation period between DMA requests. Normally, if multiple DMA data transfers are performed, consideration must be given to the Q-bus for other system functions, such as communication multiplexer,

network, etc. During the DMA dwell time, the CQD-220A will not arbitrate for the use of the Q-bus. You can select the period of the DMA Dwell Time by changing the jumper shunts listed in Table 3-7.

Table 3-7 DMA Dwell Time

W6-3	W6-4	DMA dwell time
IN	IN	0.8- μ s DMA dwell time
OUT	IN	1.6- μ s DMA dwell time
IN	OUT	3.2- μ s DMA dwell time (F)
OUT	OUT	6.4- μ s DMA dwell time

Note that (F) means factory setting.

Adaptive DMA Dwell Time

When Adaptive DMA Dwell Time is enabled, the CQD-220A monitors the DMA activity, if other devices are requesting the bus, the Dwell Time will be determined by W6 as shown in Table 3-7. If no other device is requesting the bus, the CQD-220A will request the bus immediately. This feature allows the CQD-220A to be both fast and fair to other devices on the Q-bus. You can select Adaptive DMA Dwell Time by changing the jumper shunts listed in Table 3-8.

Table 3-8 Adaptive DMA Dwell Time

W6-2	OUT	Adaptive DMA Dwell Time enabled (F)
W6-2	IN	Adaptive DMA Dwell Time disabled

Note that (F) means factory setting.

Tape Fast Search Option

This option is supported only by the CQD-220A/M/T (tape) or CQD-220A/TM. When set to the Tape Fast Search mode, the CQD-220A/M/T (tape) or CQD-220A/TM will enable high speed forward and reverse filemark search. VMS may use this mode if you do not attempt a standalone boot or run other programs that require the controller to keep track of the number of data records between filemarks. In VMS standalone boot application, this option needs to be disabled. For the ISM-11 operating system, this jumper shunt has to be installed. CMD recommends you use this option for ULTRIX and UNIX systems. Table 3-9 lists the jumper settings.

Table 3-9 Tape Fast Search Option

SW3-4	ON	Enable tape fast search option
SW3-4	OFF	Normal operation (F)

Note that (F) means factory setting.

Sync/Async Mode Selection

The CQD-220A comes standard in synchronous (sync) mode. Most SCSI devices support to sync mode. In sync mode, CQD-220A will automatically communicate with each SCSI device connected to find out whether the sync mode is supported by the device.

In async mode, CQD-220A will communicate with the SCSI device asynchronously even if the SCSI device supports sync mode. Most of the sync SCSI devices also support async. mode.

You can change the CQD-220A to async mode using the jumpers listed in Table 3-10; these jumpers control the overall sync/async mode selection and will override the On-Board Utility sync mode set-up.

Table 3-10 Sync/Async Mode Selection

SW3-6	ON	Tape sync mode disabled
SW3-6	OFF	Tape sync mode enabled (F)
SW3-7	ON	Disk sync mode disabled
SW3-7	OFF	Disk sync mode enabled (F)

Note that (F) means factory setting.

Tape Monitor Utility and SCSIformat ON-LINE

As explained in Chapter 2, the Tape Monitor Utility will allow you to monitor tape devices on the SCSI bus; and the SCSIformat ON-LINE will allow you to format SCSI devices through the CQD-220A and the software provided. To enable these features you must install the Tape Monitor Utility and SCSIformat ON-LINE as explained in their respective User's Manuals and switch SW3-5 to ON as shown in Table 3-11. For any operating system other than VMS, this jumper must not be installed.

WARNING Do not switch SW3-5 to the ON position if the TMU or FMT application software is not installed. The factory setting of SW3-5 is in OFF position (disabled).

Table 3-11 Tape Monitor Utility and SCSIformat ON-LINE Options

SW3-5	ON	Tape Monitor Utility enabled (/T, /TM) Disk SCSIformat ON-LINE enabled (/M, /TM)
SW3-5	OFF	Tape Monitor Utility disabled (F) Disk SCSIformat ON-LINE disabled (F)

Note that (F) means factory setting.

Single-ended Mode Selection

The CQD-220A SCSI port comes with single-ended SCSI drivers and receivers only. RP1 and RP3 active terminator resistors must be installed when the CQD-220A is at either end of the SCSI bus. Figure 3-3 shows the location of the terminator resistors.

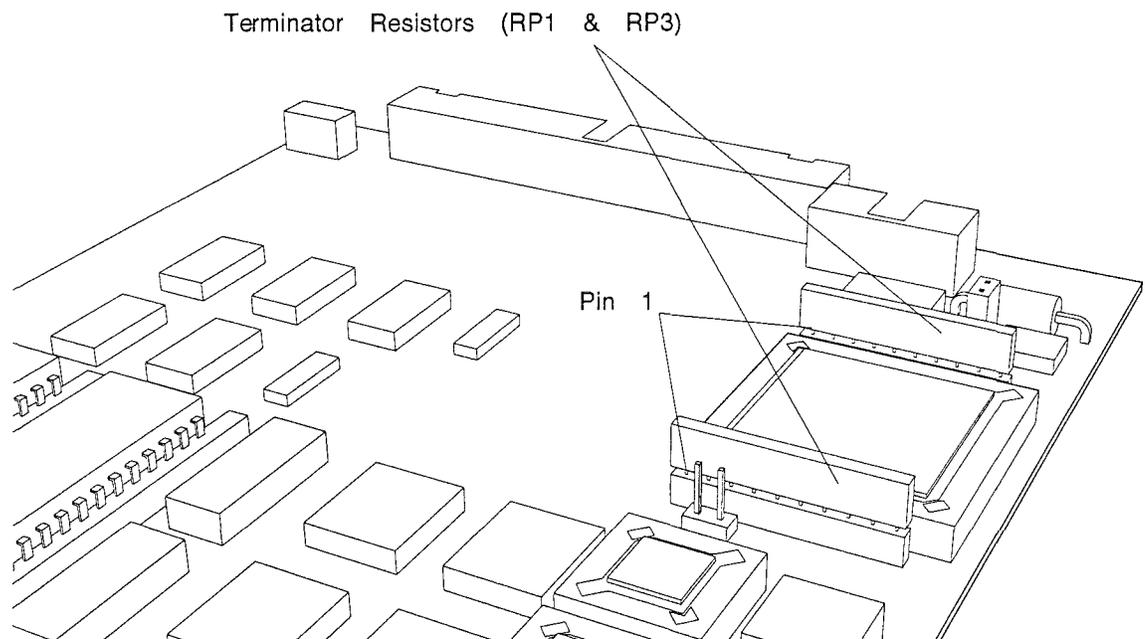


Figure 3-3: Terminator Resistor Location

Eprom Size


Eprom size is selectable by installing jumper shunt in W4. Table 3-12 illustrates the selection. Eprom size is written on the Eprom.

WARNING You must select proper jumper setting based on Eprom size; A 512 Kbit Eprom is currently shipping; 1 Mbit Eproms may be used in the future.

Table 3-12 Eprom Size Selection

W4	1-2 IN	Eprom Size 512 Kbit or 1 Mbit (F)
W4	2-3 IN	Eprom 256 Kbit

WARNING When removing and reinstalling 512-Kbit Eproms, align Eproms with IC sockets starting from pin 3. Align 1 Mbit Eproms with pin 1 of the socket. See Figure 3-4.

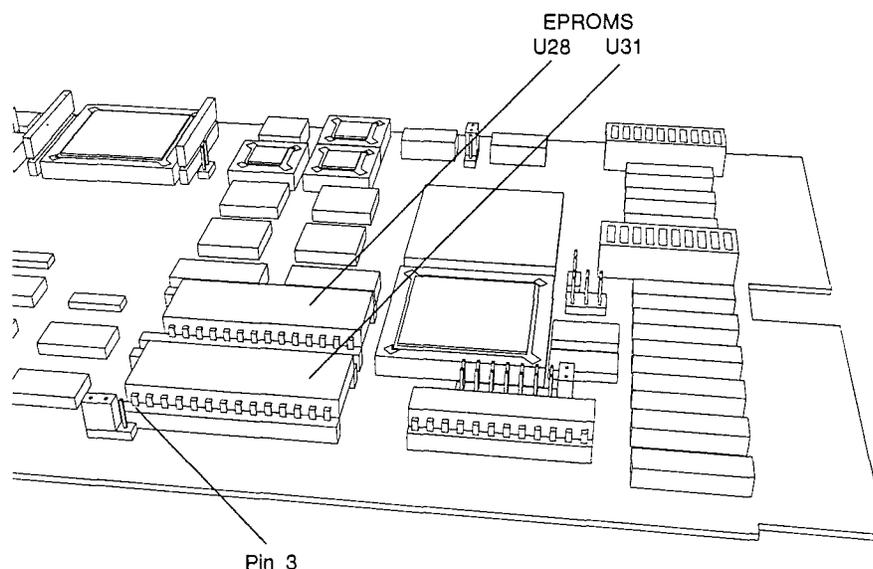**Figure 3-4: Eprom setting**

Wait State for Eprom Cycles

Wait state for Eprom cycles can be selected as shown in Table 3-13.

Table 3-13 Wait State for Eprom Cycles

W5	OUT	0 Wait State for Eprom Cycles(F)
W5	IN	1 Wait State for Eprom Cycles

Installation

This section gives you instructions for installing the CQD-220A into a system. Remember to turn off the power of the system and SCSI devices while installing the SCSI cable and terminator.

SCSI Host Adapter ID Selection

Each device on the SCSI bus requires a unique SCSI identification address (0-7). SCSI ID 7 has the highest priority on the bus and SCSI ID 0 has the lowest priority. The CQD-220A SCSI Host Adapter is factory configured to SCSI ID 7. Do not change this setting unless you are setting a multi-hosting configuration (see Multi-hosting in Chapter 4).

SCSI ID for Target Devices

Each SCSI device (initiator or target) on the SCSI bus requires a unique SCSI ID number. Since the CQD-220A has been set to SCSI ID 7 (initiator), target devices must be configured from SCSI ID 0 to 6.

The factory setting on the CQD-220A/M/T (disk) is seven disk devices, and the CQD-220A/M/T (tape) is seven tape devices. The factory setting of the CQD-220A/TM is four disk devices (SCSI ID=0 to 3) and three tape devices (SCSI ID=4 to 6). For the CQD-220A/TM with more than four disks drives or three tapes drives, use the On-Board Utility to change the configuration; otherwise, *do not* change the configuration. See Table 3-14 for SCSI Device ID Selections.

Table 3-14 **Device ID Selection**

Model	Device Support	Target SCSI ID
CQD-220A/M/T (disk)	up to 7 disk drives	SCSI ID = 0 to 6
CQD-220A/M/T (tape)	up to 7 tape drives	SCSI ID = 0 to 6
CQD-220A/TM	up to 7 disk/tape drives combined 4 disk drives and 3 tape drives (F)	SCSI ID = 0 to 3 disks (F) SCSI ID = 4 to 6 tapes (F)

Note that (F) means factory setting.

CQD-220A Mounting Slot Selection

The CQD-220A can be installed in any slot of the standard MicroVAX or LSI-11 Q-Bus backplane as long as the Q-Bus interrupt acknowledge/DMA grant daisy chain is not broken.

SCSI Bus Cabling

The CQD-220A provides a 50-pin connector (J1) to interface with external single-ended SCSI devices. (The terminators at RP1 and RP3 must be installed when the CQD-220A/223A is located at either end of the SCSI bus.)

- ◆ When the CQD-220A and the SCSI devices are installed in the same cabinet which meets EMI/RFI shielding requirements, a 25-signal twisted-pair cable must be used for connecting the CQD-220A (J1) and the SCSI devices.
- ◆ When the CQD-220A and the SCSI devices are installed in separated cabinets, the shielded SCSI cable should be used to meet FCC requirements.
- ◆ A minimum conductor size of 28-AWG must be used to minimize noise effects and ensure proper distribution of optional terminator power.
- ◆ The maximum cable length is 6.0-meters or 20-feet in single-ended channel.

SCSI Bus Termination

The CQD-220A can be installed in any position of the SCSI cable. If the CQD-220A is installed in either end of SCSI cable, on-board terminators should remain on the board. If the CQD-220A is in the middle of the SCSI bus, on-board terminators should be removed.

The CQD-220A uses active removable terminators for single-ended SCSI. Active termination provides greater noise immunity and more closely matches the cable impedance. The part number for the sips are xxx111 (9 by 110-ohms). They are located in the RP1 and RP3.

SCSI Bus Terminator Power

Any SCSI terminator (on-drive or external) needs to be powered by at least one SCSI device, otherwise the SCSI signals will be pulled down. Typically an initiator (SCSI host adapter) provides the power to the on-board terminator, external SCSI terminator and on-drive terminator when the drive is powered off. Anytime an external SCSI terminator (instead of the on-drive SCSI terminator) is used, the SCSI terminator power option of the CQD-220A has to be enabled, i.e. install jumper shunt at W2.

A minimum conductor size of 28-AWG shall be employed to minimize noise effects and ensure proper distribution of optional terminator power. The CQD-220A's TERMPWR pin is J1, pin 26 for single-ended channel. The CDQ-

223A's TERMPWR pin is J1, pin 38 for single-ended channel. Both supply terminator power through a fuse, a diode and jumper block W2 (see Table 3-15).

Table 3-15 Terminator Power Option

W2	IN	Single-ended SCSI terminator power enabled (F)
W2	OUT	Single-ended SCSI terminator power disabled

Note that (F) means factory setting.

Installation Procedures

- 1 Determine the CSR address for the CQD-220A as explained in "Determining CSR Address."

WARNING Be sure to wear anti-static wrist straps or equivalent to protect the CQD-220A from electro-static damage.

- 2 Configure the hardware as explained in "Hardware Configuration."
- 3 Set the CQD-220A and Device SCSI ID's as explained in "SCSI Host Adapter ID Selection" and "SCSI Device ID Selection."
- 4 Choose a proper slot to place the CQD-220A; and install it into that slot (see "CQD-220A Mounting Slot Selection").
- 5 Connect SCSI cable to J1 using cable specifications given in "SCSI Bus Cabling." The connector will be non-shielded for the CQD-220A.

WARNING In order to prevent accidental grounding or misconnection of terminator power, make sure that the pin 1 mark of SCSI cable matches with the pin 1 mark of SCSI device's connector before turning on the power.

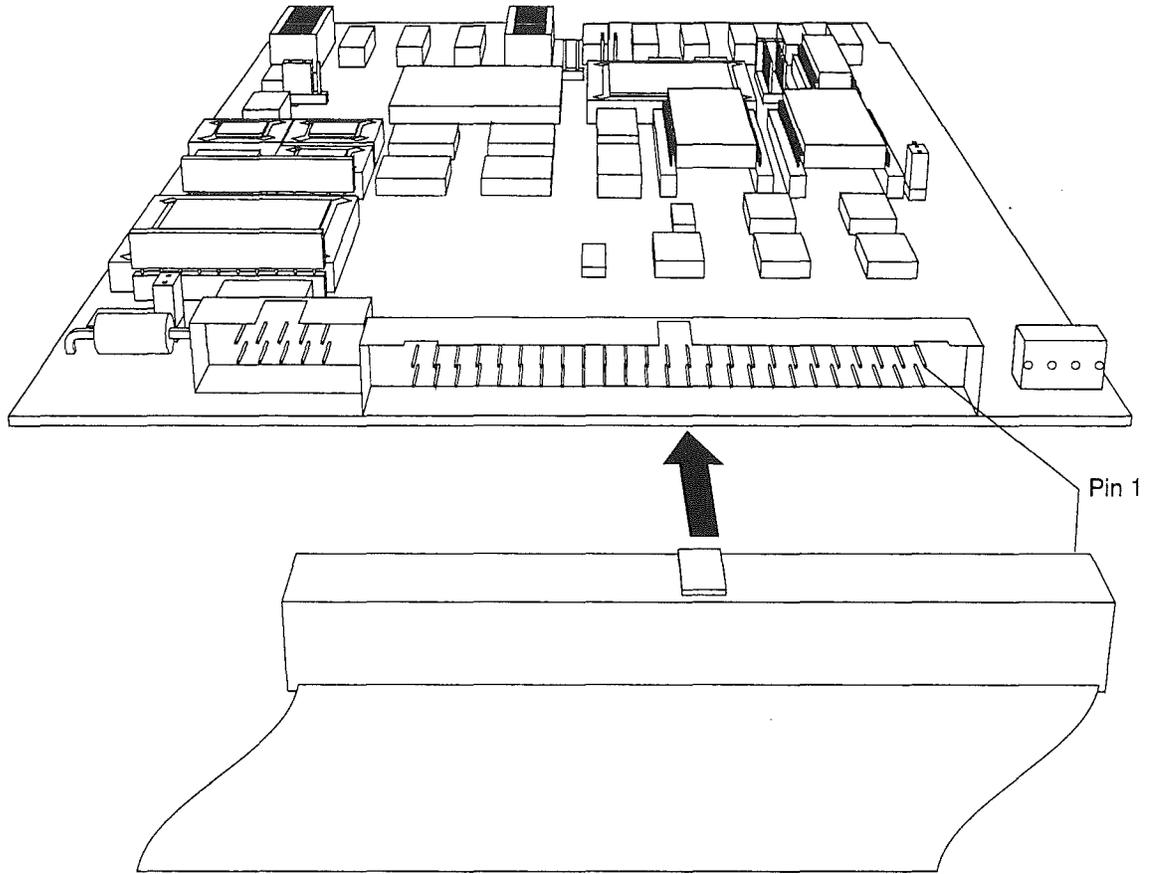


Figure 3-5: CQD-220A non-shielded cable connection

For the CQD-223A, the connector will be shielded, see Figure 3-6.

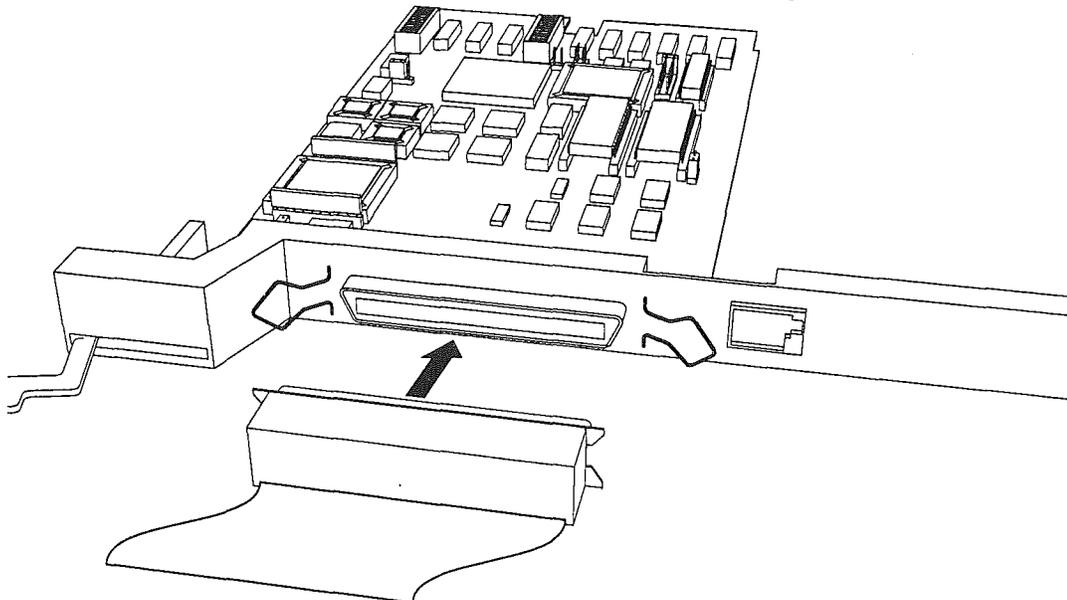


Figure 3-6: CQD-223A shielded connection

- 6 Continue SCSI cabling to connect up to seven SCSI devices to the CQD-220A. See the example in Figure 3-7.

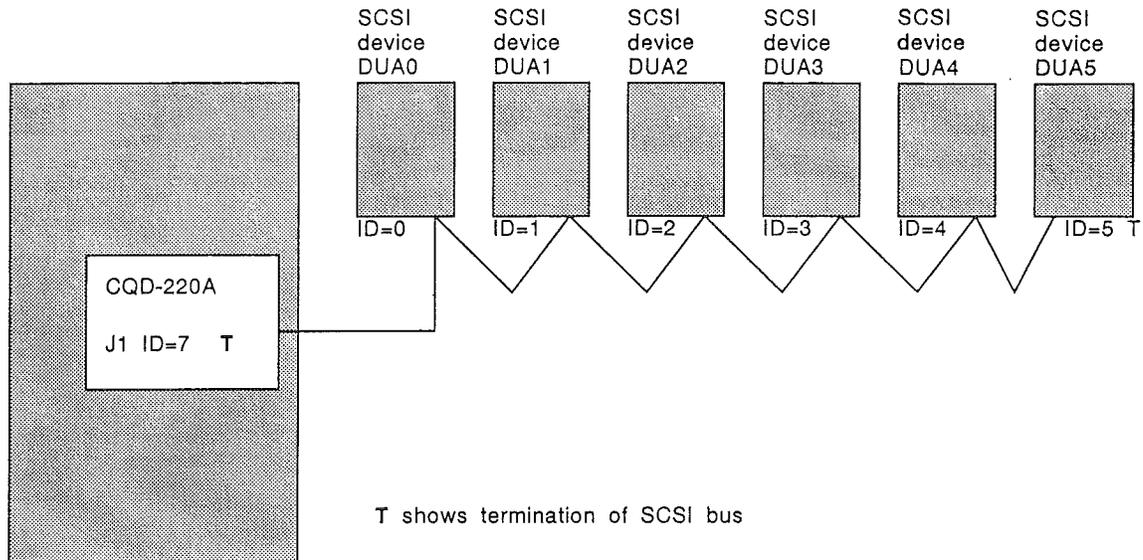


Figure 3-7: SCSI ID and Cabling

- 7 Terminate the SCSI bus at each *physical* end; see "SCSI Bus Termination." If the CQD-220A is installed in either end of SCSI cable, on-board terminators should remain on the board. If the CQD-220A is in the middle of the SCSI bus, on-board terminators should be removed. If TERMPWR is needed for the bus, place jumper shunt on W2 as explained in "SCSI Bus Terminator Power" (see the example in Figure 3-7).
- 8 Power up the system and execute On-Board Utility to scan for the SCSI devices and assure that all devices are seen and functioning properly (see Chapter 4 for On-Board Utility).
- 9 Boot the system and test with the operating system.

This chapter will assist you in setting up the CQD-220A and your system for use.

On-Board Utility

The CQD-220A SCSI host adapter comes with a general purpose On-Board Utility for all systems. The On-Board Utility can test the system slot, SCSI cable, and SCSI devices connected to the CQD-220A. Accessing the Utility can be done through LSI or VAX system or the RS-232 Port. Be sure to complete utility functions, explained at the end of this chapter.

Accessing the Utility Through the LSI or VAX System

The On-Board Utility Program can be accessed by means of an ODT command for LSI and VAX systems. One example is shown with the SCSI host adapter set to the first disk CSR address. Because the formats and features of the On-Board Utilities for LSI-11 systems and MicroVAX systems are similar (except different start up procedures), the MicroVAX utility will be described.

Instructions for using the Disk Utility with LSI-11 Systems are listed below:

- 1 Halt the processor.
- 2 Hit the Boot Switch.
- 3 Enter the CSR address plus 2 (in Octal), a slash, and 123456. For example, for CSR address 17772150 enter: 17772152/005400 123456. CSR addresses can be found in Chapter 3 or Appendix C.

- 4 Enter *CSR address plus 2* (in Octal), a *slash*, and *100* to load the utility to the system memory. For example, for CSR address 17772150 enter:
17772152/001000 100.
- 5 Enter *5000G*. The Utility program will begin executing.

EXAMPLE For steps 3 to 5 with CSR 17772150, enter the following:

```
17772152/005400 123456 [ENTER]
17772152/ 100 [ENTER]
5000G [ENTER]
```

Instructions for using this utility with VAX Systems are listed below:

- 1 Halt the CPU.
- 2 At the prompt >>> enter *U* to unlock the CPU.
- 3 At the prompt >>> enter *I* to initialize the CPU.
- 4 At the prompt >>> enter *D/P/W 20001F40 20* to enable Q-bus memory access.
- 5 At the prompt >>> enter *D/L 20088008 80000002* to set up Q-bus map.
- 6 At the prompt >>> enter *D/W YYYYYYYY A72E* to deposit to the base CSR address plus 2 (in Hex). CSR addresses can be found in Chapter 3 or Appendix C.

Where

YYYYYYYY—the CSR address plus 2 (in Hex). See Table 4-1 for disk and Table 4-2 for tape.

Table 4-1 Disk CSR Addresses Plus 2 Configurations

CSR Reference	CSR Addresses	CSR Addresses Plus 2: YYYYYYYY
772150	20001468	2000146A
760334	200000DC	200000DE
760354	200000EC	200000EE
760374	200000FC	200000FE
760340	200000E0	200000E2
760344	200000E4	200000E6
760350	200000E8	200000EA
760360	200000F0	200000F2

Table 4-2 Tape CSR Addresses Plus 2 Configurations

CSR Reference	CSR Addresses	CSR Addresses Plus 2: YYYYYYYY
774500	20001940	20001942
760404	20000104	20000106
760444	20000124	20000126
760504	20000144	20000146
760544	20000164	20000166
760410	20000108	2000010A
760450	20000128	2000012A
760454	2000012C	2000012E

- 7 At the prompt >>> enter *D * 100* to load the utility to system memory. This command deposits 100 to current address.
- 8 At the prompt >>> enter *S 400* to start the utility.

EXAMPLE For steps 2 through 8, enter:

```

U [ENTER]
I [ENTER]
D/P/W 20001F40 20 [ENTER]
D/L 20088008 80000002 [ENTER]
D/W YYYYYYYY A72E [ENTER] (YYYYYYY = CSR
+2)
D * 100 [ENTER]
S 400

```

The utility will display as shown in Figure 4-1:

```

SCSI UTILITY PROGRAM

DISK                                TAPE
1 = 772150                          A = 774500
2 = 760334                          B = 760404
3 = 760354                          C = 760444
4 = 760374                          D = 760504
5 = 760340                          E = 760544
6 = 760344                          F = 760410
7 = 760350                          G = 760450
8 = 760360                          H = 760454

SELECT CSR ADDRESS

```

Figure 4-1: Utility CSR address

- 9 Enter the corresponding CSR address for the CQD-220A. If you have a VAX system, you may skip to Figure 4-5 on page 4-6. If you have an LSI system, you will be presented a Main Menu similar to the screen represented in Figure 4-2.

```

MAIN MENU                            CSR=772150

1 = BOOT DRIVE
2 = ADDITIONAL SCSI COMMANDS

SELECT OPTION :

```

Figure 4-2: Main Menu

NOTE If the message appears "CONTROLLER NOT PRESENT," make sure CSR address is correct.

- 10 From the Main Menu select option 7, which will bring you to the SCSI Host Adapter Utility. Option 1 will halt the system.

Accessing the Utility Through the RS-232 Port

To access the utility from the RS-232 port, follow the instructions below.

- 1 Connect a terminal to the CQD-220A's RS-232 port (10 pin connector) or to the CQD-223A's RS-232 port (DEC compatible RJ-11/Modified Module 423 Jack connector). See Figures 4-4 and 4-3.

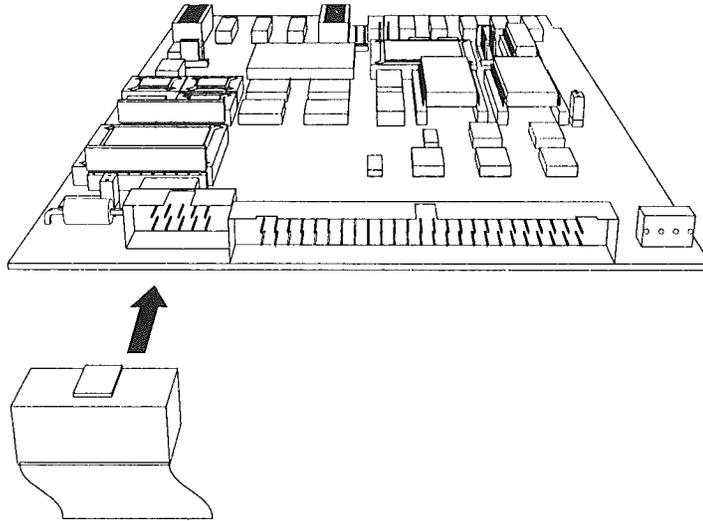


Figure 4-4: CQD-220A RS-232 Port

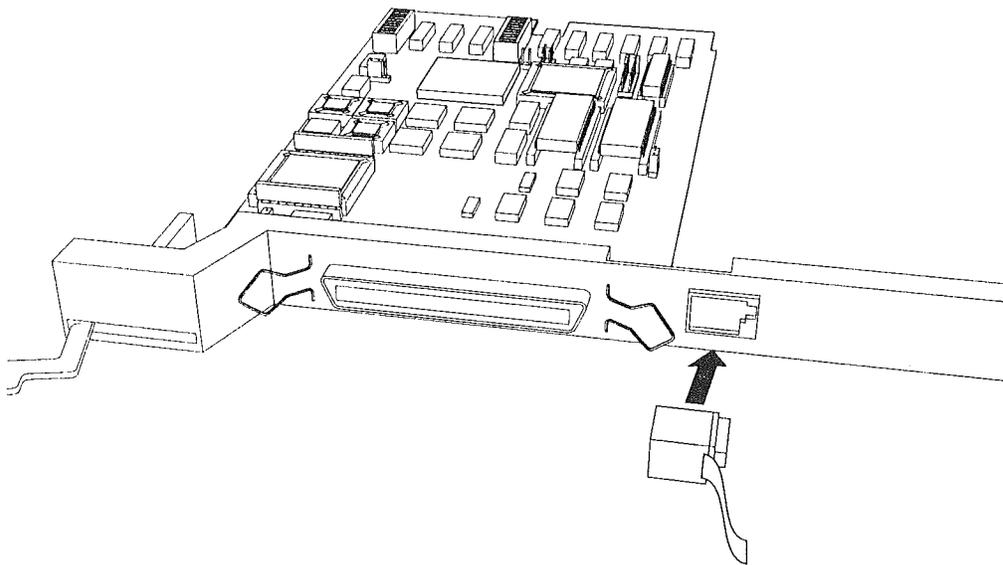


Figure 4-3: CQD-223A RS-232 Port

- 2 Set the terminal baud rate to 9600 (8-bit data, 1-stop bit, no parity) jump scroll.
- 3 Halt the system's CPU, reset the system, and hit carriage return on the terminal. The SCSI Host Adapter Utility will display as shown in Figure 4-5.

```

SCSI HOST ADAPTER UTILITY (REV. YYYxZZ)

X = UTILITY EXIT
D = DIAGNOSTICS TEST
[DISK]                                [TAPE]
1 = LOGICAL UNIT NUMBER OFFSET        6 = LOGICAL UNIT NUMBER OFFSET
2 = FORMAT DRIVE                       7 = ADDITIONAL UTILITIES
3 = QUALIFY DRIVE
4 = MANUALLY REPLACE BAD BLOCKS
5 = ADDITIONAL UTILITIES

SELECT OPTION ?

```

Figure 4-5: SCSI Host Adapter Utility

Once the SCSI Host Adapter Utility shows up, you can key in the number to select the desired option. Press [CTRL] + C at any time to return to the main menu.

- 4 Refer the next subsections for configurations. When completed, unplug the terminal, reset the system, and boot. DO NOT use the On-Board Utility while the system is running.

NOTE The following sections will illustrate the On-Board Utility from the RS-232 Port. There may be some variation in the Main Menu and the SCSI Host Adapter Utility Menu. If you are accessing from the Main Menu, simply chose the correct number for each option.

Changing LUN Offset

When a system has a HSC or in a VAX cluster it will be necessary to change the LUN (Logical Unit Number) offset. Each MSCP drive requires a different Unit Number so that the unit numbers are not duplicated. If there are no other MSCP controllers in the system, the LUN offset can be 0.

If there exists another MSCP controller with four drives (0 to 3) in a VAX cluster configuration, then the LUN offset should be four or above. In the case

that LUN offset is equal to 10, SCSI ID 0 will be DUB10 and SCSI ID 1 will be DUB11. The drives will show up as such DUA0, DUA1, DUA2, DUA3, DUB10, DUB11 (see section, "SCSI ID for Target Drives" in Chapter 3 for explanation). Follow these procedures to configure LUN offset.

- 1 Select option 1 from the SCSI Host Adapter Utility for disk drives; 6 for tape drives.
- 2 Enter the new value for LUN offset at the statement: LUN OFFSET IS 0, ENTER NEW VALUE:
- 3 At the statement: SAVE NEW VALUE (Y or N)? enter Y.

Formatting the Drive

This section details formatting a drive. The CQD-220A issues Format Unit Command to the selected SCSI disk drive and requests it to map out the defects on the Manufacture Defect List (MDL). Remember formatting a drive will rewrite all the sectors of that drive.

CMD recommends that you format all new drives. To format a drive, follow the steps below:

- 1 Select option 2 from the SCSI Host Adapter Utility.
- 2 Enter the device number from 0 to 6 in the statement: DEVICE NUMBER? <0 TO 6> DEV X.
- 3 Answer Y to the question FORMAT DRIVE X, ARE YOU SURE? if you want to continue.
- 4 At the statement: WARNING DATA WILL BE DESTROYED, ARE YOU SURE? enter Y if you want to continue.
- 5 The monitor displays WAIT while the drive is executing the format process.
- 6 The monitor will display FORMAT COMPLETE when finished executing.

Qualifying the Drive

After formatting the device, CMD recommends you qualify devices by running this procedure at least once without errors detected. The qualify program writes different patterns to the drive and then verifies the data. If there are any bad sectors, the sectors will automatically be replaced and the statement `XX XXXXXXXX BAD BLOCK REPLACED` will appear. Follow the instructions below for qualifying a drive.

- 1 Select option 3 from the SCSI Host Adapter Utility.
- 2 Enter the device number at the statement: `DEVICE NUMBER? DEV <0 TO 6>
DEV X`.
- 3 At the statement, `READY TO TEST DEVICE X, ARE YOU SURE` enter Y if you want to continue.
- 4 At the statement: `*** WILL DESTROY DATA ON THIS DEVICE, ARE YOU SURE?` enter Y if you want to continue.
- 5 The monitor will display `QUALIFY STARTED <SEQUENTIAL WRITE & READ>!
<HIT <Break> TO ABORT>`.
- 6 The monitor will display `TESTING LOOP COUNT & BLOCK NUMBER:`
- 7 Press [BREAK] to exit back to the SCSI Host Adapter Utility after you are satisfied with the qualifying process.

Manually Replacing Bad Sectors

This option allows you to replace bad sectors manually. The controller supports dynamic defect management which replaces defective sectors on-line so there is no need to manually replace bad sectors. However, if you wish to replace bad sectors manually follow these instructions; remember that any data in the sector will be lost:

- 1 Select option 4 from the SCSI Host Adapter Utility.
- 2 Enter the device number at the statement: `DEVICE NUMBER ? DEV <0 TO 6>
DEV X:`

- 3 Enter the logical block number in HEX at the statement:

```
READY TO TEST DEVICE X,  
ENTER THE BAD BLOCK NUMBER <HEX> : xxxxx
```

- 4 The monitor will display —BAD BLOCK REPLACED— when finished executing.

Additional Utilities

To access additional utilities for disk drives, select option 5 from the main menu. To access additional utilities for tape drives, select option 7 from the main menu. The additional utilities menu will display as shown in Figure 4-6.

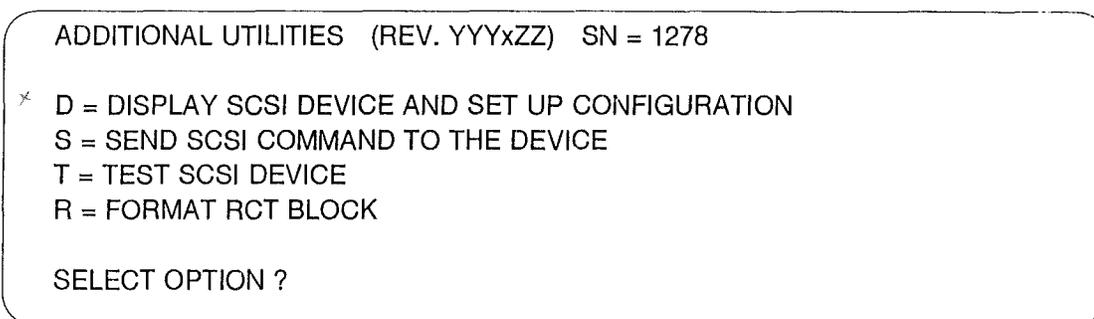


Figure 4-6: Utility Sub-menu

Displaying SCSI Device and Setting Up Configuration

Selection 'D' can be used to change the controller default configurations such as those listed below:

- ◆ reset to default
- ◆ number of disk and tape devices supported
- ◆ SCSI reset enable/disable
- ◆ SCSI disconnect enable/disable
- ◆ sync/async mode selection
- ◆ tape buffer mode enable/disable
- ◆ prevent medium removal enable/disable
- ◆ disk write with verify enable/disable
- ◆ remote density mode enable/disable
- ◆ default tape enable/disable
- ◆ reconfigure device
- ◆ autoboot start from floppy enable/disable

- ◆ write protect from controller jumper setting
- ◆ truncate disk size for volume shadowing
- ◆ eject removable disk cartridge after dismount

This utility can also scan/display the SCSI devices attached to the CQD-220A. The CQD-220A/TM will be shown as an example in the following display. To display SCSI devices and set up configuration follow the procedures below.

- 1 Select option *D* at the sub-menu (Figure 4-6), the following current configuration is displayed as shown in Figure 4-7.

```

DEV0  DU0, SCSI ID 0, LUN 0
       Disconnect ON, Sync Mode ON, Prevent Medium Removal ON, Write W/Verify OFF

DEV1  DU1, SCSI ID 1, LUN 0
       Disconnect ON, Sync Mode ON, Prevent Medium Removal ON, Write W/Verify OFF

DEV2  DU2, SCSI ID 2, LUN 0
       Disconnect ON, Sync Mode ON, Prevent Medium Removal ON, Write W/Verify OFF

DEV3  DU3, SCSI ID 3, LUN 0
       Disconnect ON, Sync Mode ON, Prevent Medium Removal ON, Write W/Verify OFF

DEV4  MU0, SCSI ID 4, LUN 0
       Disconnect ON, Sync Mode ON, Tri-Density ON, Buffer Mode ON

DEV5  MU1, SCSI ID 5, LUN 0
       Disconnect ON, Sync Mode ON, Tri-Density ON, Buffer Mode ON

DEV6  MU2, SCSI ID 6, LUN 0
       Disconnect ON, Sync Mode ON, Tri-Density ON, Buffer Mode ON

DEV7  SCSI ID 7, HOST ADAPTER SCSI Reset ON, Density Mode ON, Default Tape OFF
       Boot Floppy OFF, Eject Disk ON, Truncate Size OFF
       RSV/RSL Option ON
       Sel Timeout = 250 msec

```

Figure 4-7: Current configuration, default

NOTE If Truncate Size is toggled, "Truncate Mode ON" will display under each disk device options and at the bottom when configuration is displayed.

- 2 To change the configuration, enter *Y* at the statement: CHANGE CONFIGURATION ? (Y/N) The menu shown in Figure 4-8 will display. 7

NOTE See subsection, "Unit Numbering" on page 4-17 before trying to reconfigure devices.

R = Toggle SCSI Reset	M = Toggle Density Mode
D = Toggle Disconnect	B = Toggle Buffer/Truncate Mode (Tape/Disk)
S = Toggle Sync/Async	W = Toggle Density/Write Verify Mode (Tape/Disk)
C = Reconfigure Device	P = Toggle Prevent Medium Removal (Disk only)
U = Toggle Default Tape (Tape Only)	
A = Autoboot Start From Floppy Drive	
N = Write Protect from Controller Jumper Setting	
V = Truncate Disk Size for Volume Shadowing	
E = Eject Disk after Dismount	
L = Reserve/Release Disk Option	
J = Change Selection Timeout Period	
T = Reset All Device Modes to Default	
Z = Reset Controller to Default Configuration	

Figure 4-8: Configuration change

The following list is an explanation of the selections in Figure 4-8.

R = Toggle SCSI reset—If SCSI reset is enabled, a reset to the SCSI bus will be issued on power up. This should be turned off when multi-hosting is desired.

D = Toggle Disconnect—This option allows you to enable or disable disconnect for each device. If enabled the controller will indicate its ability to disconnect during the SCSI identify message.

S = Toggle Sync/Async—This option allows you to configure each device for synchronous or asynchronous operations. If synchronous is selected, the controller will attempt a synchronous handshake with the device. If the device accepts the message exchange, they will transfer data synchronously, otherwise they will transfer asynchronously.

C = Reconfigure Device—This option allows you to reconfigure the device at any time.

U = Toggle Default Tape—This option allows you to force the presence of a tape unit to the operating system even if one does not exist. This is needed for some operating systems when the controller is connected to devices with a long self test procedure after power-up. If it is disabled, only units connected to the controller are seen by the operating system.

A = Autoboot Start From Floppy Drive—For LSI only, this option allows you to set the system to boot directly from the first floppy drive; if no floppy drive is present, the system will begin to boot from the first device.

N = Write Protect from Controller Jumper Setting—This option allows you to write protect disk 0 and disk 1 from the front panel. Connector J7 must be installed. Default is OFF.

V = Truncate Disk Size for VMS Volume Shadowing—When SW3-9 is set to ON, this option causes the CQD-220A to divide the specified disk into 126-block groups. If the is not evenly divisible by 126, any remaining blocks (up to 125) will be truncated, effectively reducing the total capacity of the drive by a small amount. The benefit of selecting this option is improved VMS volume shadowing performance. The message "***WARNING ** Truncate Size ON/OFF will be toggled, Are you sure?" will display before truncate switch can be toggled. If this feature is used on a disk that contains valid data, the data must be removed and later restored after turning this feature ON. Use option "B" to toggle individual devices.

E = Eject Disk after Dismount—This option allows you to specify whether the removable disk cartridges will eject from the drive after dismount.

L = Reserve/Release Disk Option—This option is to let the MSCP ONLINE exclusive use modifier to be operable.

J = Change Selection Timeout Period—This option allows the user to specify the timeout period of the SCSI chip during the selection phase, from 10 to 250 ms. The default timeout period is 250 ms. If your SCSI devices do not need 250 ms to respond to selection request from the host, you may achieve better performance by decreasing the selection timeout period.

T = Reset all Device Modes to Default—These modes are—disconnect, synchronous, Prevent Medium Removal, Write with Verify, and Buffer modes.

Z = Reset Controller to Default Configuration—This option allows the you to reset the controller to its factory default configuration. The CQD-220A/TM will reset to support four disk drives and three tape drives;

the CQD-220A/M/T (disk) , seven disk drives; and CQD-220A/M/T (tape), seven tape drives. Other features reset to include SCSI disconnect, SCSI reset, synchronous communication, buffer mode, prevent medium removal and density selection enabled, write with verify, write protect disabled, reserve/release disk disabled, and default tape disabled. ALWAYS use this feature before reconfiguring the CQD-220A.

M = Toggle Density Mode—This option allows you to configure the controller for remote density selection. If enabled, remote density selection may take place. If enabled, the controller reports itself as a 'TU81.' If disabled, it reports itself as a 'TK50.'

B = Toggle Buffer/Truncate Mode (Tape/Disk)—For tape devices, this option allows the controller to configure each individual tape device for write caching. If enabled, the tape device will send command complete message and good status to the controller once the data has been transferred to the tape device's internal buffers. If disabled, such message and status will be sent when the data is actually written to the tape.

W = Toggle Density/Write Verify Mode—For tape devices, this option toggles tri-density on or off. The CQD-220A supports all three VMS densities. If your tape drive supports tri-density, you should turn tri-density on. The CQD-220A supports most, but not all, tri-density drives. For disk devices, this option will allow the SCSI command Write with Verify to be issued for MSCP write with verify modifier. When set to OFF (which is the default), the normal write command will be issued.

P = Prevent Medium Removal—This option is for removable disk drives only. When set to ON, a "Prevent Medium Removal" will be issued to a drive when it is mounted by VMS. This will disable the eject media push-button in front of the drive. An "Allow Medium Removal" will be issued when the drive is dismounted by VMS and the push-button will be enabled. This feature can be disabled and the media can be ejected at anytime.

- 3 To reconfigure the device select option C and the screen will prompt you with the following question as shown in Figure 4-9.

```

Number of Disks? (0-7)   4
DU0 to be Reconfigured ? (Y/N) N
DU1 to be Reconfigured ? (Y/N) N
DU2 to be Reconfigured ? (Y/N) N
DU3 to be Reconfigured ? (Y/N) N

Number of Tapes? (0-3)   3
MU0 to be Reconfigured ? (Y/N) N
MU1 to be Reconfigured ? (Y/N) N
MU2 to be Reconfigured ? (Y/N) N

```

Figure 4-9: SCSI host adapter ID change

- 4 Enter the number of disk and/or tapes. Default configuration is four disks, and three tapes; it is not necessary to configure if running less than four disks and three tapes.

NOTE If zero is selected for the number of disks or tapes disable the corresponding CSR address as shown in Tables 3-1 to 3-4. Do not use 0 disk and/or 0 tape configuration in the above setup.

Answer Y or N to reconfigure each of the disks or tapes. If you answer Y, the screen will prompt you with these questions:

```

DUX SCSI ID? <0-7>
DUX LUN? <0-3>

```

Figure 4-10: Disk and Tape Configuration Change

NOTE This LUN is SCSI LUN; it is normally 0. This is used only for devices that support multiple LUNs.

- 5 When you have completed these instructions the display will show your current configuration and prompt you again with the question CHANGE CONFIGURATION ? (Y/N). Enter N; this will cause the CQD-220A to scan the SCSI bus.

The utility will display your current configuration with manufacturer's name, model number, and firmware revisions for each device. Record this information for future use.

Sending SCSI Commands To The Device

Selection 'S' can be used to send SCSI commands to the selected disk/tape drives directly.

This option is used to send a 6-, 10-, or 12-byte command to a SCSI device. Follow these procedures to send SCSI commands to the device:

- 1 Enter *S* from the "Additional Utilities" Menu. (Be sure you have correctly selected either 5 from the SCSI Host Adapter Utility for disk drives, or 7 for tape drives.)
- 2 At the question DEVICE NUMBER ? DEV <0-6> DEV enter the device number.
- 3 Enter the command sequence at the statement:

```
READY TO TEST DEVICE X
  EDIT CDB <HEX> ***<ESC> TO TERMINATE EDITING***
  BYTE 0000= 00
```

If a 6- or 10-byte command is used, press [ESC] to terminate command editing. If a 12-byte command is used, command editing is terminated automatically.

- 4 At the statement WRITE DATA TO THE DEVICE ? <Y OR N> enter *N* to immediately send the command if SCSI command does not require a data out phase.

Or enter *Y* to send data to the device after the command phase if SCSI command requires a data out phase. Enter the data and enter [ESC] to terminate editing. The statement SAVE EDITED DATA IN BUFFER ? <Y OR N> will appear. Enter *Y* to save data in the buffer; or enter *N* to erase edited data after the command is sent.

Testing SCSI Device

Selection 'T' can be used to read only, write and read selected disk drive, and/or write and read selected tape drive continuously. This is a diagnostic tool to help with installation and testing. Follow the procedures below to test the SCSI device.

- 1 Enter *T* from the "Additional Utilities" menu. (Be sure you have correctly selected either 5 from the SCSI Host Adapter Utility for disk drives, or 7 for tape drives.)
- 2 At the question DEVICE NUMBER ? DEV <0-6> DEV enter the device number.
- 3 When testing for *disk devices*, at the statement READY TO TEST DEVICE X, DO YOU WANT TO READ ONLY ? <Y OR N> enter *Y* to read only.

Enter *N* to write and read. The question ARE YOU SURE? will display. Enter *Y* to write and read to the device.

WARNING *N* will destroy all data on the device.

When testing for *tape devices*, the statement ARE YOU SURE? will display. Enter *Y* to test the device.

- 4 At the statement, IS THIS FOR DUAL HOSTS QUALIFICATION TEST? <Y/N>, enter *Y*. Enter *N* for single host qualification. The test will continue until you abort. Allow the test to continue for a few minutes for new devices and ten minutes for suspected bad devices. Press [BREAK] or [CTRL] + C to abort and exit back to the SCSI Host Adapter Utility.

Formatting RCT Block

Selection 'R' can be used to format the RCT blocks of the disk drive selected. This command writes zeros in the last logical block of the device. If you try to skip the formatting process and directly use the drive, you *must* use this option to eliminate "unrecoverable bad RCT block." However, CMD recommends you format the drive. To format the RCT block follow these instructions:

- 1 Select *R* from the "Additional Utilities." (Be sure you have previously selected 5 from the SCSI Host Adapter Utility for disk drives.)
- 2 Enter device number at the statement: DEVICE NUMBER? DEV <0-6> DEV.

If device is off-line the following statement will appear, DEVICE OFFLINE, RESELECT OR PROCEED ? (R/P). Enter *R* to reselect or *P* to proceed.

- 3 FORMAT COMPLETE will display when RCT block has been formatted.

Completing Utility Functions

The following procedures should be completed when you have accessed the On-Board Utility through the RS-232 port.

- 1 Use the On-Board Utility to verify SCSI cable and SCSI devices connected to the CQD-220A after installing the CQD-220A in the Q-bus slot.
- 2 After verifying the SCSI connections, disconnect RS-232 cable from the back panel, and reset the system.

NOTE If the terminal is connected, this may cause the On-Board Utility to be invoked during system operation and will take control of the Host Adapter from VMS.

The following procedures should be completed when you have accessed the On-Board Utility through the Virtual Console of the LSI or VAX systems.

- 1 Use the On-Board Utility to verify the Q-bus slot seating, SCSI cable, and SCSI devices connected to the CQD-220A after installing the CQD-220A in the Q-bus slot.
- 2 After verifying the SCSI connections, reset the system.

Unit Numbering For Devices

This section explains configuring unit numbers. Unit numbers may be changed by using the "Configure LUN Offset" from the main menu. If you used the 'D' option from the "Additional Utilities" menu, the terminal will display the *MU* and/or *DU* numbers as shown in Table 4-3, factory default settings for unit numbers.

Table 4-3 Default for Unit Numbers

CQD-220A/M/T (tape)	SCSI ID	On-Board Utility	Unit No.
	0	MU0	0
	1	MU1	1
	2	MU2	2
	3	MU3	3
	4	MU4	4
	5	MU5	5
	6	MU6	6
CQD-220A/M/T (disk)	SCSI ID	On-Board Utility	Unit No.
	0	DU0	0
	1	DU1	1
	2	DU2	2
	3	DU3	3
	4	DU4	4
	5	DU5	5
	6	DU6	6
CQD-220/TM	SCSI ID	On-Board Utility	Unit No.
	0	DU0	0
	1	DU1	1
	2	DU2	2
	3	DU3	3
	4	MU0	0
	5	MU1	1
	6	MU2	2

An example below is given for each type of controller to show how the unit numbers can be determined. Refer to Figure 4-7 if necessary.

CQD-220A/M/T (tape)—Tape drives must be configured starting from SCSI ID 0 to properly use the information from Table 4-3. *mu0* will be unit number 0; this is with LUN offset set to 0. Setting the LUN offset to 10 will change the *mu* number to 10 (ie., *mu10*), making the unit number 10.

CQD-220A/M/T (disk)—Disk drives must be configured starting from SCSI ID 0 to properly use the information from Table 4-3. *du0* will be unit number

0. This is with LUN offset set to 0. Setting the LUN offset to 10 will change the *du* number to 10 (ie., *du10*), making the unit number 10.

CQD-220A/TM—Default is four disk drives and three tape as shown in Table 4-3. If you have more than four disk drives or three tape drives, follow these guidelines—disk drives must start at SCSI ID 0 and tape drives must start after the last disk drive's SCSI ID number and reconfigure the CQD-220A/TM (see subsection, "Displaying SCSI Devices and Setting Up Configuration"). Note the example below.

SCSI ID 0 disk
 SCSI ID 1 disk
 SCSI ID 2 disk
 SCSI ID 3 disk
 SCSI ID 4 disk

SCSI ID 5 tape
 SCSI ID 6 tape

SCSI ID 7 is initiator (CQD-220A/TM)

The *MU* and *DU* numbers are the unit numbers mapped back to the operating system. If the CQD-220A/TM is configured following these guidelines, you can apply this formula to determine the unit number mapped back to the operating system:

$\begin{array}{r} \text{SCSI ID of the disk drive} \\ + \text{ the LUN offset for disk} \\ = \text{ unit number for disk} \end{array}$	$\begin{array}{r} \text{SCSI ID of tape drive} \\ - \text{ number of disk drives} \\ + \text{ LUN offset for tapes} \\ = \text{ unit number for tape} \end{array}$
--	--

Multi-Hosting Configuration

The following is a list of software requirements for multi-hosting; refer to Appendix A for supported multi-hosting devices:

- ◆ VMS version 5.3 or above
- ◆ VAX cluster software must be running on both systems with at least one of the DEC's interconnects operational
- ◆ Tape drives can only be mounted to one system at a time
- ◆ Allocation classes must be the same for all systems when installing disk drives (value must not equal 0).

Using VMS and the CQD-220A/M/T (disk) or CQD-220A/TM, you can multi-host by following the instructions below:

- 1 Configure the CQD-220A to SCSI ID 7 for the first computer; configure the CQD-220A to SCSI ID 6 for the second computer. If you need to alter the Host Adapter SCSI ID change the jumper settings as shown in Table 4-4.

Table 4-4 Host Adapter ID Selection

SW3-1	SW3-2	SW3-3	Initiator ID
ON	ON	ON	Host adapter ID = 7 highest priority (F)
ON	ON	OFF	Host adapter ID = 6
ON	OFF	ON	Host adapter ID = 5
ON	OFF	OFF	Host adapter ID = 4
OFF	ON	ON	Host adapter ID = 3
OFF	ON	OFF	Host adapter ID = 2
OFF	OFF	ON	Host adapter ID = 1
OFF	OFF	OFF	Host adapter ID = 0, lowest priority

Note that (F) means factory setting.

- 2 From the Additional Utilities Menu in the On-Board Utility, follow these instructions:
 - a Select option *D* to display current configuration.
 - b Answer *Y* to the statement: CHANGE CONFIGURATION ? (Y/N) The menu shown in Figure 4-8 will display.
 - c Select *Z* to reset configuration back to default.
 - d Answer *Y* to reconfigure the adapter.

NOTE If you ever reconfigure the board, you must reset the configuration to default using selection Z.

- e Select R to toggle SCSI reset. Then set the SCSI reset to OFF. Do this for all SCSI host adapters to be multi-hosted.
- f Answer Y to reconfigure the adapter.
- g Select C to reconfigure the device. Then configure the CQD-220A for exact number of disks and tapes. This will inhibit scanning of other host adapters.
- h If other MSCP disks are in the cluster, follow the rules in the subsection "Changing LUN Offset" in "On-Board Utility" so that each device has a unique unit number.
- i Exit out of the On-Board Utility.

NOTE In a multi-hosting system the *physical* disk device name must be identical on both systems.

- 3 Terminate both *physical* ends of the SCSI bus.

If the CQD-220A is at either end of the SCSI bus, remove on-board terminators, RP1 and RP3, and use a pass-through terminator as close to the board as possible. If the CQD-220A is in the middle of the SCSI bus, RP1 and RP3 terminators *must* be removed, *do not* use pass through terminators.

In the event that one system becomes inoperable with only two nodes in the VAX cluster, a quorum disk must be used to count as a vote; this keeps the other system running. Refer to VMS VAXcluster manual order number AA-LA27A-TE to set up a quorum disk and a VAX cluster.

NOTE When running *cluster_config.com* on a system with only Ethernet as a computer interconnect, answer *Yes* for the question, "WILL THIS BE A SATELLITE NODE?"

Partitioning Configuration

You may partition a device into two or four sections under VMS or ULTRIX using the CQD-220A/M/T (disk) or CQD-220A/TM. To partition a device, follow the instructions below.

- 1 Configure the SCSI devices as explained in the section "Displaying SCSI Device and Setting Up Configuration."
- 2 Select *D* from "Additional Utilities." The current configuration will display all physical devices as shown in the example in Figure 4-11:

```

DEV0  DU0, SCSI ID 0, LUN 0
      Disconnect ON, Sync Mode ON, Prevent Medium Removal ON, Write W/Verify OFF

DEV1  DU1, SCSI ID 1, LUN 0
      Disconnect ON, Sync Mode ON, Prevent Medium Removal ON, Write W/Verify OFF

DEV2  DU2, SCSI ID 2, LUN 0
      Disconnect ON, Sync Mode ON, Prevent Medium Removal ON, Write W/Verify OFF

DEV3  DU3, SCSI ID 3, LUN 0
      Disconnect ON, Sync Mode ON, Prevent Medium Removal ON, Write W/Verify OFF

DEV4  MU0, SCSI ID 4, LUN 0
      Disconnect ON, Sync Mode ON, Tri-Density ON, Buffer Mode ON

DEV5  MU1, SCSI ID 5, LUN 0
      Disconnect ON, Sync Mode ON, Tri-Density ON, Buffer Mode ON

DEV6  MU2, SCSI ID 6, LUN 0
      Disconnect ON, Sync Mode ON, Tri-Density ON, Buffer Mode ON

DEV7  SCSI ID 7, HOST ADAPTER SCSI Reset ON, Density Mode ON, Default Tape OFF
      Boot Floppy OFF, Eject Disk ON, Truncate Size OFF
      RSV/RSL Option ON
      Sel Timeout = 250 ms

```

Figure 4-11: Current configuration

- 3 Answer *Y* to the question that appears on the screen: CHANGE CONFIGURATION (Y/N)? Figure 4-12 will display:

R = Toggle SCSI Reset	M = Toggle Density Mode
D = Toggle Disconnect	B = Toggle Buffer/Truncate Mode (Tape/Disk)
S = Toggle Sync/Async	W = Toggle Density/Write Verify Mode (Tape/Disk)
C = Reconfigure Device	P = Toggle Prevent Medium Removal (Disk only)
U = Toggle Default Tape (Tape Only)	
A = Autoboot Start From Floppy Drive	
N = Write Protect from Controller Jumper Setting	
V = Truncate Disk Size for Volumn Shadowing	
E = Eject Disk after Dismount	
L = Reserve/Release Disk Option	
J = Change Selection Timeout Period	
T = Reset All Device Modes to Default	
Z = Reset Controller to Default Configuration	

Figure 4-12: Configuration change

- 4 Select Z to reset configuration back to default. Answer Y to reconfigure the adapter. This step is **IMPERATIVE!**

NOTE If you ever reconfigure the board, you must reset the configuration to default using selection Z.

- 5 Select Option C. Answer Y to the devices to be partitioned as shown in the example in Figure 4-13:

```

Number of Disks? (0-7)  4                [total number of logical disks]
DU0 to be Reconfigured ? (Y/N)  Y
DU0 SCSI ID ? (0-7)  0
DU0 LUN ? (0-3)  0
Number of Partitions ? (NONE, 2, 4)  2  [N is the default]
DU2 to be Reconfigured ? (Y/N)  Y
DU2 SCSI ID ? (0-7)  1
DU2 LUN ? (0-3)  1
Number of Partitions ? (NONE, 2, 4)  2  [N is the default]

Number of Tapes? (0-3)  3
MU0 to be Reconfigured ? (Y/N)  N
MU1 to be Reconfigured ? (Y/N)  N
MU2 to be Reconfigured ? (Y/N)  N

```

Figure 4-13: Partitioning example

After you have completed configuration, the system will display device configuration as shown in the example in Figure 4-14:

DEV0	DU0, SCSI ID 0, LUN 0 MICROP 1598-15MD1063303SI125 Disconnect ON, Sync Mode ON, Prevent Medium Removal ON, Write W/Verify OFF
DEV1	DU1, SCSI ID 0, LUN 0 MICROP 1598-15MD1063303SI125 Disconnect ON, Sync Mode ON, Prevent Medium Removal ON, Write W/Verify OFF
DEV2	DU2, SCSI ID 1, LUN 0 MICROP 1588-15MB1036810IC09 Disconnect ON, Sync Mode ON, Prevent Medium Removal ON, Write W/Verify OFF
DEV3	DU3, SCSI ID 1, LUN 0 MICROP 1588-15MB1036810IC09 Disconnect ON, Sync Mode ON, Prevent Medium Removal ON, Write W/Verify OFF
DEV4	MU0, SCSI ID 4, LUN 0 Disconnect ON, Sync Mode ON, Tri-Density ON, Buffer Mode ON
DEV5	MU1, SCSI ID 5, LUN 0 Disconnect ON, Sync Mode ON, Tri-Density ON, Buffer Mode ON
DEV6	MU2, SCSI ID 6, LUN 0 Disconnect ON, Sync Mode ON, Tri-Density ON, Buffer Mode ON
DEV7	SCSI ID 7, HOST ADAPTER SCSI Reset ON, Density Mode ON, Default Tape OFF Boot Floppy OFF, Eject Disk ON, Truncate Size OFF RSV/RSL Option ON Sel Timeout = 250 ms

Figure 4-14: Current configuration

- 6 Format RCT block for each partition of each device. See "Formatting RCT Block" in "Additional Utilities."
- 7 Exit out of the On-Board Utility.

NOTE The system considers each partition as a device even though the location (LUN) is the same.

VMS Configuration

If you followed procedures in "Determining CSR Address" in Chapter 3, VMS software will automatically configure new devices added. *NO* other configuration is required. If VMS does not, run Auto Configure as shown in Appendix D.

ULTRIX Configuration

VAX and DEC systems using ULTRIX software must be manually configured to access the CQD-220A boards.

First, examine current configuration file to determine which controllers and devices are already connected to the system. Then refer to the respective sections for configuration procedures for the CQD-220A/M/T (tape), CQD-220A/M/T (disk) or CQD-220A/TM.

CQD-220A/M/T (tape)

Edit the configuration file by performing the following instructions. The CQD-220A must be configured with a higher *klesiu number*, higher *uq number*, and higher *tms number* than any other *klesiu* controller in the configuration file.

- 1 Make sure the following two lines are in the configuration file:

```
adapter uba& at nexus?
```

Where

? = the system will fill in this variable (simply enter this ?).

& = the node ID of the Q-bus adapter.

- 2 Connect the controller to the node on the Q-bus by entering the following line:

```
controller klesiuϑ at uba&
```

Where

ϑ = the variable number that represents the CQD-220A/M/T (tape).

& = same number used in step 1.

- 3 Tell ULTRIX what the name of the controller will be:

controller uq# at klesiud csr XXXXXXXXX vector uqintr

Where

u = the same number used in step 2.

= the variable used to represent the controller.

XXXXXXXXX = CSR address.

- 4 Name the tape drives and list drive unit by entering the following line:

tape tms0 at uq# drive α

tape tms1 at uq# drive β

Where

= the same number used to represent the controller in step 3.

α = the MU number in the On-Board Utility displays this configuration.

β = the MU number in the On-Board Utility displays this configuration different than *α* .

CQD-220A/M/T (disk)

Edit the configuration file by performing the following instructions. Note the CQD-220A must be installed with a higher *node ID number*, higher *klesib number*, higher *ra number*, and higher *uq number* than any other *kdb* and *klesib* controller in the configuration file.

- 1 Make sure the following two lines are in the configuration file:

adapter uba $\&$ at nexus?

Where

? = the system will fill in this variable (simply enter this ?).

$\&$ = the node ID of the Q-bus adapter.

- 2 Connect the controller Q-bus by entering the following line:

controller uda ϑ at uba $\&$

Where

ϑ = the variable number that represents the CQD-220A/M/T (disk).

$\&$ = the same number used in step 1.

- 3 Tell ULTRIX what the name of the controller will be:

controller uq# at uda ϑ csr XXXXXXXXX vector uqintr

Where

= the variable used to represent the controller.

ϑ = the variable used in Step 2.

XXXXXXXX = CSR address.

- 4 Name the tape drives and list drive unit by entering the following line:

disk ra0 at uq# drive α

disk ra1 at uq# drive β

Where

= the same number used to represent the controller in step 3.

α = the *DU* number in the On-Board Utility displays this configuration.

β = the *DU* number in the On-Board Utility displays this configuration different than α .

CQD-220A/TM

Edit the configuration file by performing the following instructions for the CQD-220A/TM. Note the CQD-220A/TM must be configured with a higher *klesiu number*, higher *uq number*, and higher *tms numbers* than any other *klesiu* controller; and a higher *uda number*, higher *uq number*, and higher *ra number* than any other *uba* controller in the configuration file.

- 1 Make sure the following two lines are in the configuration file:

adapter uba $\&$ at nexus?

Where

? = the system will fill in this variable (simply enter this ?).

$\&$ = the node ID of the Q-bus adapter.

- 2 Connect the controller the Q-bus by entering the following line:

controller klesiu ϑ at uba $\&$

controller uda# at uba $\&$

Where

ϑ = the variable number that represents the CQD-220A/TM.

$\&$ = the same number used in step 1.

- 3 Tell ULTRIX what the name of the controller for the different functions will be:

```
controller uq∇ at klesiu∅ csr XXXXXXXX vector uqintr
controller uqΔ at uda# csr XXXXXXXX vector uqintr
```

Where

∇ = variable used to represent the controller.

Δ = variable used to represent the controller (unique from ∇ above).

∅ = the same number used in step 3 representing the controller.

= the same number used in step 3 representing the controller.

XXXXXXXX = CSR address.

- 4 Name the tape drives and list drive unit by entering the following line:

```
tape tms0 at uq∇ driveα
tape tms1 at uq∇ driveβ
disk ra0 at uqΔ driveα
disk ra1 at uqΔ driveβ
```

Where

∇ = the same number used to represent the controller in step 4.

Δ = variable used to represent the controller (unique from ∇ above).

α = the MU number in the On-Board Utility displays this configuration.

β = the DU number in the On-Board Utility displays this configuration.

This chapter consists of a SCSI glossary, SCSI commands used by the CQD-220A for MSCP and TMSCP emulation, SCSI status codes, SCSI messages, SCSI single-ended and differential signals.

SCSI Glossary

The following is a glossary of frequently used SCSI terms.

Connect—The function that occurs when an initiator selects a target to start an operation.

Disconnect—The function that occurs when a target release control of the SCSI bus, allowing it to go to the BUS FREE phase.

Initiator—A SCSI device (usually a host system) that requests an operation to be performed by another SCSI device.

LUN—Logic Unit Number.

Peripheral device—A peripheral that can be attached to a SCSI device (e.g., magnetic disk, magnetic tape, or optical disk).

Reconnect —The function that occurs when a target selects an initiator to continue an operation after a disconnect.

SCSI address—The octal representation of the unique address (0-7) assigned to an SCSI device. This address would normally be assigned and set in the SCSI device during system installation.

SCSI ID—The bit-significant representation of the SCSI address referring to one of the signal lines DB (7-0).

SCSI device—A host computer adapter or a peripheral controller or an intelligent peripheral that can be attached to the SCSI bus.

Target—A SCSI device that performs an operation requested by an initiator.

SCSI Commands

SCSI commands used by the CQD-220A/M, CQD-220A/M/T (disk) or CQD-220A/TM for disk emulation are listed in Table 5-1.

Table 5-1 **SCSI Commands**

Code	Command Name
00h	Test Unit Ready
01h	Rezero Unit
03h	Request Sense
04h	Format Unit (1)
07h	Reassign Block
08h	Read
0Ah	Write
0Bh	Seek
12h	Inquiry
15h	Mode Select
16h	Reserve Unit
17h	Release Unit
1Ah	Mode Sense
1Bh	Start/Stop Unit
1Eh	Prevent/Allow Medium Removal
25h	Read Capacity
28h	Extended Read
2Ah	Extended Write
2Bh	Extended Seek
3Eh	Read Long (2)
3Fh	Write Long(2)

(1)The Format Unit command is used by the On-Board Utility only.

(2)These commands are used if the drives support them.

SCSI commands used by the CQD-220A/T, CQD-220A/M/T (tape) or CQD-220A/TM for tape emulation are listed in Table 5-2.

Table 5-2 SCSI Commands

Code	Command Name
00h	Test Unit Ready
01h	Rewind
03h	Request Sense
08h	Read
0Ah	Write
10h	Write Filemarks
11h	Space
12h	Inquiry
15h	Mode Select
16h	Reserve Unit
17h	Release Unit
19h	Erase
1Ah	Mode Sense
1Bh	Load/Unload
1Eh	Prevent/Allow Medium Removal

SCSI Status

The SCSI status codes used by CQD-220A are listed in Table 5-3.

Table 5-3 SCSI Status

Code	Status Name
00h	Good
02h	Check Condition
08h	Busy
10h	Intermediate/Good
18h	Reservation Conflict

SCSI Messages

The SCSI Messages used by CQD-220A are listed in Table 5-4.

Table 5-4 SCSI Messages

Code	Message Name
00h	Command Complete
01h	Extended Message
02h	Save Data Pointer
03h	Restore Pointer
04h	Disconnect
05h	Initiator Detected Error
06h	Abort
07h	Message Reject
08h	No Operation
09h	Message Parity Error
80-FFh	Identify

SCSI Single-Ended Signals

This section illustrates the CQD-220A pin assignments for the single-ended channel for non-shielded connector (J1) and the CQD-223A pin assignments for the single-ended shielded connector (J1).

Single-Ended Non-Shielded Connector

Figure 5-1 illustrates the pin locations of the CQD-220A non-shielded SCSI device connector for J1.

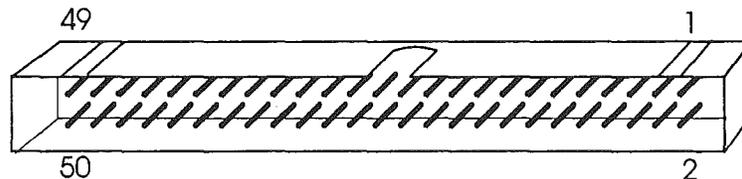


Figure 5-1: SCSI device non-shielded connector

Table 5-5 shows the CQD-220A non-shielded single-ended SCSI connector pin assignments for (J1).

Table 5-5 Single-Ended Non-Shielded Connector Pin Assignments (J1)

Signal	Pin Number
-DB(0)	2
-DB(1)	4
-DB(2)	6
-DB(3)	8
-DB(4)	10
-DB(5)	12
-DB(6)	14
-DB(7)	16
-DB(P)	18
GROUND	20
GROUND	22
GROUND	24
TERMPWR	26
GROUND	28
GROUND	30
-ATN	32
GROUND	34
-BSY	36
-ACK	38
-RST	40
-MSG	42
-SEL	44
-C/D	46
-REQ	48
-I/O	50

NOTE All odd pins except pin 25 are connected to ground. Pin 25 is left open. The minus sign next to the signal indicates active low.

Single-Ended Shielded Connector

Figure 5-2 illustrates pin locations for the single-ended CQD-223A SCSI device shielded connector.

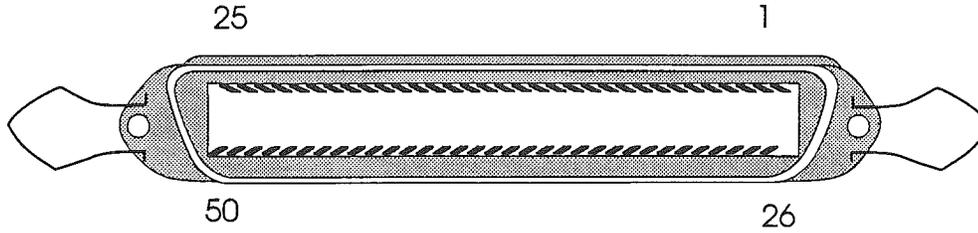


Figure 5-2: SCSI device shielded connector

Table 5-6 illustrates the CQD-223A shielded SCSI connector pin assignments.

Table 5-6 Single-Ended Shielded Connector Pin Assignments (J1)

Signal	Pin Number
-DB(0)	26
-DB(1)	27
-DB(2)	28
-DB(3)	29
-DB(4)	30
-DB(5)	31
-DB(6)	32
-DB(7)	33
-DB(P)	34
GROUND	35
GROUND	36
GROUND	37
TERMPWR	38
GROUND	39
GROUND	40
-ATN	41
GROUND	42
-BSY	43
-ACK	44
-RST	45
-MSG	46
-SEL	47
-C/D	48
-REQ	49
-I/O	50

NOTE Pin 1 to pin 25 (except pin 13) are connected to ground. Pin 13 is left open. The minus sign next to the signal indicates active low.

Appendix A

Supported Devices and Operating Systems

SCSI Devices

The following subsections list devices supported by the CQD-220A. Contact CMD Technical Support for correct firmware revision for the drives listed.

CMD supports most high-capacity SCSI-2 disk drives.

Magnetic disk drives supported—/M/T (disk) and /TM

DEC	DSP3053L, DSP3053LD, DSP3085, DSP3105, DSP3105D, DSP3107, DSP3107LD, DSP3133L, DSP3133LD, DSP3160, DSP3210, DSP5200, DSP5300, DSP5350, DSP5400, RZ24, RZ25, RZ26, RZ27, RZ28, RZ55, RZ56, RZ57, RZ58
Fujitsu	M2266, M2624, M2652, M2654, M2694
Hewlett Packard	97548, 97549, 97560, 97562, C2247, C3010
Hitachi	DK315C, DK515C, DK516C, DK517C
Micropolis	1548, 1908, 1924, 2112, 1528-15
Seagate	ST11200, ST11750N (Bar-1), ST11950N, ST12250N, ST12400, ST12550N (Bar-2), ST41200 (wren7), ST41600 (elite1), ST41601 (elite1f), ST41650 (wren8), ST41651 (wren8f), ST42100 (wren9), ST42400 (elite2), ST43400 (elite3)
Toshiba	MK538FB

Magneto-optical drives supported—/M/T (disk) and /TM

Fujitsu	M2511A
Hewlett Packard	1716c, 1716T, 1719c
MaxOptics	Tahiti 1, Tahiti 2
Most	Most
Panasonic	LS7010
Pinnacle	650, 1300
Ricoh	503000, 5030E, 5031E

Sharp	JY750
Sony	SMO-D501, SMO-E501

Removeable Disk Systems—/M/T (disk) and /TM

Bernoulli	45, 90, 150
-----------	-------------

RAM Disks supported—/M/T (disk) and /TM

Anamartic
 Atto
 DES "Disk Emulation Systems"
 Imperial Technology
 Vermont Research
 Western Automation

CD-ROM drives supported—/M/T (disk) and /TM

DEC	RRD40, RRD42
LMS	CM212
NEC	CRD83J
Sony	
Toshiba	XM3200

RAID systems and controllers supported—/M/T (disk) and /TM

CMD	CRD-5000
Core IAS	
CPRx00	
Digidata controller	
Dynatek Raider	
MicroArray	u500, u800
NCR	ADP-92 controller
Raider	5
Storage Concepts	500

Tape drives supported—M/T (tape) and /TM

Cipher	T826S, T860S
Conner Python 4mm DAT	4324NP, 4330NT, 4520NT
Digital	TK50Z, TKZ08, TLZ04, TLZ06, TLZ07, TSZ07, TZ30, TZ85, TZ857
Exabyte 8mm	8200, 8205, 8500, 8505, 4200C, 8500C
Hewlett Packard 4mm DAT	35470A, 35480A

WangDat 4mm 1300, 2000, 2600, 3100, 3200
 DAT

3480-type tape drives supported—M/T (tape) and /TM

Cipher T480
 Fujitsu 2480, 2481, 2680
 STC 4280

9-track tape drives supported—M/T (tape) and /TM

5612GCR
 Cipher M995, TSZ07
 DMT2820C2
 Hewlett Packard 88780B
 M4 Data 9914
 Qualstar 3412
 STC 2925, 9914
 Telex 9274

Operating Systems

All DEC-compatible products designed by CMD Technology, Inc. implement MSCP (Mass Storage Control Protocol)/TMSCP (Tape Mass Storage Control Protocol). CMD supports its implementation of MSCP/TMSCP beginning with the indicated version of the DEC operating systems listed in Table A-1.

Table A-1 Operating Systems Supported by CQD-220A/223A

VMS®	4.0 to 6.0
ULTRIX™	1.2 to 4.2
Unix/Berkeley™	4.2 to 4.3
RSX-11M	Disk 4.1-5.3, Tape 4.2-5.3
RSX-11M-Plus	3.0-4.3
RSTS/E	Disk 9.0-10.0, Tape 9.5-10.0
RT-11	Disk 5.1-5.5, Tape 5.4-5.5
DSM-11	3.3-4.1
ISM-11	3.4
TSX+	(see RT-11)
VAXELN	x.x
AT&T UNIX®	System V

Appendix B

Troubleshooting

VMS Analyze/Error Utility

The CQD-220A logs controller dependent information in *ERRLOG.SYS* file. User can use the VMS ANALYZE/ERROR Utility to open the file *ERRLOG.SYS* and display the error messages for troubleshooting. By including option switches such as */SINCE=DATE* and */INCLUDE=MUB0*, you may define the time reference and device. To enter the ANALYZE/ERROR Utility, log onto the system and enter the following command:

```
ana/err/since=[time]/include=[device]
```

Some examples are shown by the following:
To view all errors that VMS has logged, enter:

```
ana/err
```

To view the errors only on tape devices, enter:

```
ana/err/inc=tapes
```

To view the errors that have occurred only on one tape unit (MUB0), enter;

```
ana/err/inc=mubo  
ana/err/inc=(ptb,mubo)
```

To view the MUB0 errors that occurred on April 20, 1990 since 14:22 (02:22 PM), enter:

```
ana/err/since=20-Apr-1989:14:22/inc=mubo
```

One example of the error log message is shown in below:

BEGINING OF INTERVENING ENTRIES

*****ENTRY 6.*****

```

ERROR SEQUENCE 9.                                LOGGED ON SID 02005F78
ERL$LOGMESSAGE ENTRY      20-APR-1989 10:21:55.41
                        KA750      REV# 120.  UCODE   REV# 95.
I/O SUB-SYSTEM, UNIT _MUA0:
MESSAGE TYPE              0002
                        TAPE MSCP MESSAGE
MSLG$L_CMD_REF           99730004
MSLG$W_SEQ_NUM           0001
                        SEQUENCE #1.
MSLG$B_FORMAT            00
                        CONTROLLER ERROR
MSLG$B_FLAGS             00
MSLG$W_EVENT             00E8  DATA ERROR
                        UNRECOVERABLE ECC ERROR

MSLG$Q_CNT_ID            00340000
                        03090000
                        UNIQUE IDENTIFIER, 000000340000
                        TAPE CLASS DEVICE
                        TK50P
MSLG$B_CNT_SVR           01
                        CONTROLLER SOFTWARE VERSION #1.
MSLG$B_CNT_HVR           01
                        CONTROLLER HARDWARE VERSION #1.
    
```

Controller Dependent Information: Listed below is the controller dependent information for the CQD-220A.

		;COMMENTS:
		;SCSI COMMAND, 6 BYTES
LONGWORD 1.	00000008	;COMMAND BYTE 3 TO 0
	/.../	;(LEFT TO RIGHT, BYTE 3,2,1,0)
LONGWORD 2.	00000050	;BYTE 7 TO 6 DONT CARE
		;COMMAND BYTE 5 TO 4
	/P.../	;EXTENDED SENSE, 26 BYTES
LONGWORD 3.	00030070	;SENSE DATA BYTE 3 TO 0
	/P.../	;(LEFT TO RIGHT, BYTE 3,2,1,0)
LONGWORD 4.	12000000	;SENSE DATA BYTE 7 TO 4
	/.../;	
LONGWORD 5.	00000000	;SENSE DATA BYTE 11 TO 8
	/.../;	
LONGWORD 6.	00000000	;SENSE DATA BYTE 15 TO 12
	/.../;	
LONGWORD 7.	10000000	;SENSE DATA BYTE 19 TO 16
	/.../;	
LONGWORD 8.	04000000	;SENSE DATA BYTE 23 TO 20
	/.../;	
LONGWORD 9.	0000E202	;SENSE DATA BYTE 26 TO 24
	/b../;	
LONGWORD 10	00000000	;(RESERVED)
	/.../;	

Refer to the SCSI tape drive manual for a description of the error reported by the tape drive or call CMD for more detailed information.

Cables

If the system does not recognize the CQD-220A or devices connected, check the cable connections. Make sure pin 1 on the cable is aligned with pin 1 on the SCSI device or CQD-220A. Make sure pins are *NOT* bent.

LED Indicators

When the Red LED is lit, turn system "**OFF**" and reboot. If the Red LED is still lit, call CMD technical support at (800) 426-3832 or (714) 454-0800.

CMD Technical Support

Having a CMD board entitles you to responsive technical support. Before you call CMD Technical Support, please gather the information listed below that pertains to your configuration. Make a note of any on-screen messages when a problem occurs and have this manual close by.

- CMD** CMD product model number and serial number.
Firmware Rev. of CMD board as shown on Eprom on the
CQD-220A with a blue CMD logo and copyright label.
Listing of jumper settings on the board.
Distributor company and contact.
- SCSI** SCSI devices model numbers and firmware Rev. as shown in the
On-Board Utility.
Settings of SCSI ID numbers of all devices.
- Computer** Computer model.
Operating System version.
Complete listing of other controllers in computer backplane.
Specify multi-hosting or clustering.
- Problem** Describe exact nature of problem.
Specify detailed error messages.
Specify any recent modification to the system.
Is this a new installation?
Does the problem occur consistently?
Does the problem occur when you do not use the board?
Does the problem occur with another system (if available)?

You may contact CMD Technical Support from 8:30 AM to 5:30 PM, Pacific Standard Time, Monday through Friday, excluding major holidays, at:

(714) 454-0800 or
(800) 426-3832 or
(714) 455-1656 FAX

Appendix C

Jumper Settings

This chapter lists the jumper settings and CSR addresses for the CQD-220A.

Pin Assignments

Fig. C-1 shows the physical pin number assignments and functions of the J2 RS-232 port for accessing the On-Board Utility and J3 Front Panel Interface. For CMD's On-Board RS-232 Utility, only pins 2, 4, 9 and grounds are used.

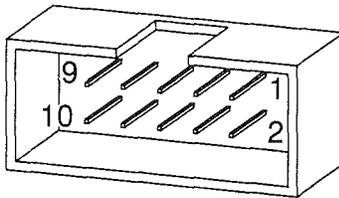


Figure C-1: Pin Locations for J2 (CQD-220A) and J3

Figure C-1 shows pin assignments for the RS-232 Port, J2B, of the CQD-223A.

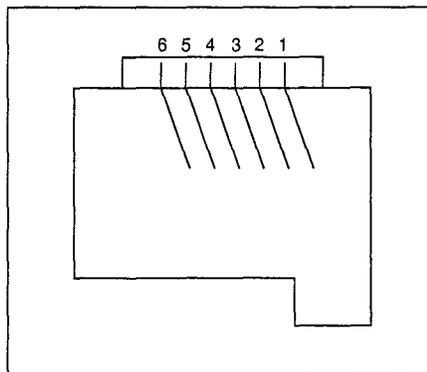


Figure C-2: Pin Locations for J2B (CQD-223A)

Connector J2 for the CQD-220A and J2B for the CQD-223A pin assignments are listed in Table C-1 shown when you are facing the connector from the controller's top edge.

Table C-1 Pin Assignments for RS-232 Utility Interface

J2 (CQD-220A)	J2B (CQD-223A)	Pin Assignments
Pin 1	Pin 1	No connect
Pin 2		Ground
Pin 3	Pin 5	TXD, transmit data for RS-232 application.
Pin 4	Pin 3	Ground
Pin 5	Pin 4	No connect
Pin 6		No connect
Pin 7		No connect
Pin 8	Pin 2	RXD, receive data for RS-232 application.
Pin 9		Ground
Pin 10	Pin 6	No connect

Table C-2 lists the Host Adapter ID selections.

Table C-2 Host Adapter ID Selections

SW3-1	SW3-2	SW3-3	Initiator ID
ON	ON	ON	Host adapter ID = 7 highest priority (F)
ON	ON	OFF	Host adapter ID = 6
ON	OFF	ON	Host adapter ID = 5
ON	OFF	OFF	Host adapter ID = 4
OFF	ON	ON	Host adapter ID = 3
OFF	ON	OFF	Host adapter ID = 2
OFF	OFF	ON	Host adapter ID = 1
OFF	OFF	OFF	Host adapter ID = 0, lowest priority

Note (F) means factory setting.

Table C-3 lists remaining switch settings.

Table C-3 Switch Settings

SW3-4	ON	Enable tape fast search option
SW3-4	OFF	Normal operation (F)
SW3-5	ON	Tape Monitor Utility enabled—/M/T (tape), /TM Disk SCSIformat ON-LINE enabled—/M/T (disk), /TM
SW3-5	OFF	Tape Monitor Utility disabled (F) Disk SCSIformat ON-LINE disabled (F)
SW3-6	ON	Tape sync mode disabled
SW3-6	OFF	Tape sync mode enabled (F)
SW3-7	ON	Disk sync mode disabled
SW3-7	OFF	Disk sync mode enabled (F)
SW3-8	OFF	Reserved (F)
SW3-9	ON	Enable Disk Truncate Mode
SW3-9	OFF	Normal Operation—No Truncation (F)
SW3-10	OFF	CQD220A/T/M disk only (F)
SW3-10	ON	CQD220A/T/M tape only

Table C-4 CQD-220A Jumper Pin Assignments

W1	OUT	Reserved (F)
W2	IN	SCSI terminator power enabled (F)
W2	OUT	SCSI terminator power disabled
W3	OUT	Reserved (F)
W4	1-2 IN	Eprom Size 512-Kbit or 1-Mbit
W4	2-3 IN	Eprom Size 256-Kbit
W5	OUT	0 Wait State for Eprom Cycles (F)
W5	IN	1 Wait State for Eprom Cycle
W6-1	OUT	Adaptive DMA enabled (F)
W6-1	IN	Adaptive DMA disabled
W6-2	OUT	Adaptive DMA Dwell Time enabled (F)
W6-2	IN	Adaptive DMA Dwell Time disabled
W6-3	IN	0.8- μ s DMA dwell time
W6-4	IN	
W6-3	OUT	1.6- μ s DMA dwell time
W6-4	IN	
W6-3	IN	3.2- μ s DMA dwell time (F)
W6-4	OUT	
W6-3	OUT	6.4- μ s DMA dwell time
W6-4	OUT	
W6-5	OUT	Block mode DMA enabled (F)
W6-5	IN	Block mode DMA disabled
W6-6	OUT	Auto-Bootstrap address = 773000
W6-7	IN	
W6-6	IN	Auto-Bootstrap address = 771000
W6-7	IN	
W6-6	OUT	Auto-Bootstrap disabled (F)
W6-7	OUT	
W6-6	IN	Auto-Bootstrap address = 775000
W6-7	OUT	
W6-8	IN	Reserved (F)
W7-1 to W7-3	OUT	Reserved (F)
W8	1-2	22-Bit addressing (F)
W8	Cut	18-Bit addressing—cut the connection 1-2
W9	OUT	Reserved (F)
W10	OUT	Reserved (F)
W11	OUT	Reserved (F)
W12	OUT	Reserved (F)

Note (F) means factory setting.

CSR Address Selections

Table C-5 lists the 31 disk CSR addresses supported by the CQD-220A/M/T (disk only) with the IC P220A08A in U30 and SW3-10 set to "OFF."

Table C-5 CQD-220A/M/T (disk only) CSR Addresses

Address	LSI-11	Micro VAX	SW2-1	SW2 -2	SW2 -3	SW2 -4	SW2 -5
1	17772150	200001468	ON	ON	ON	ON	ON
2	17760334	200000DC	ON	ON	ON	ON	OFF
3	17760354	200000EC	ON	ON	ON	OFF	ON
4	17760374	200000FC	ON	ON	ON	OFF	OFF
5	17760340	200000E0	ON	ON	OFF	ON	ON
6	17760344	200000E4	ON	ON	OFF	ON	OFF
7	17760350	200000E8	ON	ON	OFF	OFF	ON
8	17760360	200000F0	ON	ON	OFF	OFF	OFF
9	17760364	200000F4	ON	OFF	ON	ON	ON
10	17760370	200000F8	ON	OFF	ON	ON	OFF
11	17760400	20000100	ON	OFF	ON	OFF	ON
12	17760404	20000104	ON	OFF	ON	OFF	OFF
13	17760410	20000108	ON	OFF	OFF	ON	ON
14	17760414	2000010C	ON	OFF	OFF	ON	OFF
15	17760420	20000110	ON	OFF	OFF	OFF	ON
16	17760424	20000114	ON	OFF	OFF	OFF	OFF
17	17760430	20000118	OFF	ON	ON	ON	ON
18	17760434	2000011C	OFF	ON	ON	ON	OFF
19	17760440	20000120	OFF	ON	ON	OFF	ON
20	17760444	20000124	OFF	ON	ON	OFF	OFF
21	17760450	20000128	OFF	ON	OFF	ON	ON
22	17760454	2000012C	OFF	ON	OFF	ON	OFF
23	17760460	20000130	OFF	ON	OFF	OFF	ON
24	17760464	20000134	OFF	ON	OFF	OFF	OFF
25	17760470	20000138	OFF	OFF	ON	ON	ON
26	17760474	2000013C	OFF	OFF	ON	ON	OFF
27	17760500	20000140	OFF	OFF	ON	OFF	ON
28	17760504	20000144	OFF	OFF	ON	OFF	OFF
29	17760510	20000148	OFF	OFF	OFF	ON	ON
30	17760514	2000014C	OFF	OFF	OFF	ON	OFF
31	*special disk mode		OFF	OFF	OFF	OFF	ON
32	disable disk		OFF	OFF	OFF	OFF	OFF

*temporarily set at CSR=17760520

SW3-10 must be set to "OFF" when the CQD220A/M/T is in disk-only mode

Table C-6 lists the tape CSR addresses supported by the CQD-220A/M/T (tape only) with the IC P220A08A in U30 and SW3-10 set to "ON."

Table C-6 CQD-220A/M/T (tape only) CSR Address Selections

Address	LSI-11	MicroVAX	SW2 -6	SW2 -7	SW2 -8	SW2 -9	SW2 -10
1	17774500	20001940	ON	ON	ON	ON	ON
2	17760404	20000104	ON	ON	ON	ON	OFF
3	17760444	20000124	ON	ON	ON	OFF	ON
4	17760504	20000144	ON	ON	ON	OFF	OFF
5	17760544	20000164	ON	ON	OFF	ON	ON
6	17760410	20000108	ON	ON	OFF	ON	OFF
7	17760450	20000128	ON	ON	OFF	OFF	ON
8	17760454	2000012C	ON	ON	OFF	OFF	OFF
9	17760414	2000010C	ON	OFF	ON	ON	ON
10	17760420	20000110	ON	OFF	ON	ON	OFF
11	17760460	20000130	ON	OFF	ON	OFF	ON
12	17760510	20000148	ON	OFF	ON	OFF	OFF
13	17760514	2000014C	ON	OFF	OFF	ON	ON
14	17760520	20000150	ON	OFF	OFF	ON	OFF
15	*special tape select mode		OFF	OFF	OFF	OFF	ON
16	disable tape		OFF	OFF	OFF	OFF	OFF

*temporarily set at CSR=17760760

SW3-10 must be set to "ON" when the CQD220A/M/T is in tape-only mode

Table C-7 lists the 31 disk CSR addresses supported by the CQD-220A/TM with the IC P220A01A in U30.

Table C-7 CQD-220A/TM CSR Addresses (Disk)

Address	LSI-11	Micro VAX	SW2-1	SW2 -2	SW2 -3	SW2 -4	SW2 -5
1	17772150	200001468	ON	ON	ON	ON	ON
2	17760334	200000DC	ON	ON	ON	ON	OFF
3	17760354	200000EC	ON	ON	ON	OFF	ON
4	17760374	200000FC	ON	ON	ON	OFF	OFF
5	17760340	200000E0	ON	ON	OFF	ON	ON
6	17760344	200000E4	ON	ON	OFF	ON	OFF
7	17760350	200000E8	ON	ON	OFF	OFF	ON
8	17760360	200000F0	ON	ON	OFF	OFF	OFF
9	17760364	200000F4	ON	OFF	ON	ON	ON
10	17760370	200000F8	ON	OFF	ON	ON	OFF
11	17760400	20000100	ON	OFF	ON	OFF	ON
12	17760404	20000104	ON	OFF	ON	OFF	OFF
13	17760410	20000108	ON	OFF	OFF	ON	ON
14	17760414	2000010C	ON	OFF	OFF	ON	OFF
15	17760420	20000110	ON	OFF	OFF	OFF	ON
16	17760424	20000114	ON	OFF	OFF	OFF	OFF
17	17760430	20000118	OFF	ON	ON	ON	ON
18	17760434	2000011C	OFF	ON	ON	ON	OFF
19	17760440	20000120	OFF	ON	ON	OFF	ON
20	17760444	20000124	OFF	ON	ON	OFF	OFF
21	17760450	20000128	OFF	ON	OFF	ON	ON
22	17760454	2000012C	OFF	ON	OFF	ON	OFF
23	17760460	20000130	OFF	ON	OFF	OFF	ON
24	17760464	20000134	OFF	ON	OFF	OFF	OFF
25	17760470	20000138	OFF	OFF	ON	ON	ON
26	17760474	2000013C	OFF	OFF	ON	ON	OFF
27	17760500	20000140	OFF	OFF	ON	OFF	ON
28	17760504	20000144	OFF	OFF	ON	OFF	OFF
29	17760510	20000148	OFF	OFF	OFF	ON	ON
30	17760514	2000014C	OFF	OFF	OFF	ON	OFF
31	*special disk mode		OFF	OFF	OFF	OFF	ON
32	disable disk		OFF	OFF	OFF	OFF	OFF

*temporarily set at CSR=17760520

Table C-8 lists the tape CSR addresses supported by the CQD-220A/TM with the IC P220A01A in U30.

Table C-8 CQD-220A/TM CSR Address Selections (Tape)

Address	LSI-11	MicroVAX	SW2 -6	SW2 -7	SW2 -8	SW2 -9	SW2 -10
1	17774500	20001940	ON	ON	ON	ON	ON
2	17760404	20000104	ON	ON	ON	ON	OFF
3	17760444	20000124	ON	ON	ON	OFF	ON
4	17760504	20000144	ON	ON	ON	OFF	OFF
5	17760544	20000164	ON	ON	OFF	ON	ON
6	17760410	20000108	ON	ON	OFF	ON	OFF
7	17760450	20000128	ON	ON	OFF	OFF	ON
8	17760454	2000012C	ON	ON	OFF	OFF	OFF
9	17760414	2000010C	ON	OFF	ON	ON	ON
10	17760420	20000110	ON	OFF	ON	ON	OFF
11	17760460	20000130	ON	OFF	ON	OFF	ON
12	17760510	20000148	ON	OFF	ON	OFF	OFF
13	17760514	2000014C	ON	OFF	OFF	ON	ON
14	17760520	20000150	ON	OFF	OFF	ON	OFF
15	17760550	20000168	ON	OFF	OFF	OFF	ON
16	17760554	2000016C	ON	OFF	OFF	OFF	OFF
17	17760560	20000170	OFF	ON	ON	ON	ON
18	17760604	20000184	OFF	ON	ON	ON	OFF
19	17760610	20000188	OFF	ON	ON	OFF	ON
20	17760614	2000018C	OFF	ON	ON	OFF	OFF
21	17760620	20000190	OFF	ON	OFF	ON	ON
22	17760644	200001A4	OFF	ON	OFF	ON	OFF
23	17760650	200001A8	OFF	ON	OFF	OFF	ON
24	17760654	200001AC	OFF	ON	OFF	OFF	OFF
25	17760660	200001B0	OFF	OFF	ON	ON	ON
26	17760704	200001C4	OFF	OFF	ON	ON	OFF
27	17760710	200001C8	OFF	OFF	ON	OFF	ON
28	17760714	200001CC	OFF	OFF	ON	OFF	OFF
29	17760744	200001E4	OFF	OFF	OFF	ON	ON
30	17760750	200001E8	OFF	OFF	OFF	ON	OFF
31	*special tape select mode		OFF	OFF	OFF	OFF	ON
32	disable tape		OFF	OFF	OFF	OFF	OFF

*temporarily set at CSR=17760760

Appendix D

VMS SYSGEN Connect Statement

To properly use the *CONNECT* statement in the SYSGEN Utility of VMS 5.0 and newer versions, the following rules must be followed.

- 1 Run the SYSGEN Utility, from either terminal mode or through a command file by entering at the system prompt *MC SYSGEN*.

It is recommended that you use *SYCONFIG.COM* if an automatic command file is used.

- 2 Issue the *CONNECT* statement to connect the controller by entering the following line at the SYSGEN prompt:

```
CONNECT aaaa/ADAPTER=bbb/CSR=%Occccccc/  
VECTOR=%Oddd/DRIVER=eeDRIVER
```

Where:

aaaa—the designation of the controller (no :) such as PTB0.

bbb—the adapter number which can be found from the SYSGEN utility *SHOW/CONFIG* (the NEXUS number) in decimal.

ccccccc—the CSR of the controller being added on the specified NEXUS preceded by %O (letter O) in octal.

ddd—the VECTOR of the controller being added on the specified NEXUS preceded by %O (letter O) in octal.

ee —the name of the driver for the controller being connected.

- 3 Issue the next *CONNECT* statement to connect the drive by entering the following line at the *SYSGEN* prompt:

```
CONNECT ffff/NOADAPTER/SYSIDHIGH=%Xgggg/
SYSIDLOW= %Xhhhhhhh/DRIVER=iiDRIVER
```

Where:

ffff—the designation of the drive (no :) such as *MUB0*.

gggg—the *SYSIDHIGH* number which is 8000 plus the *NEXUS* number.

hhhhhhh—the *SYSIDLOW* number which can be obtained after the controller is connected by using the *SYSGEN* utility *SHOW/UNIBUS*.

The newly attached controller will be seen at the CSR address previously specified followed by the *SYSIDLOW* number seen in (*hhhhhhh*).

[EXAMPLE] you may wish to connect a tape drive to a MicroVAX 3300. This tape drive is the third MU: device to be added to the Q-bus. The *AUTOCONNECT* recommended CSR for this device will not be used but the CSR of 760444 will be used instead with a VECTOR of 340 on UB0.

- 3 View the configuration files by entering the following line at the system prompt:

```
MC SYSGEN
SHOW/CONFIG
```

The screen displays the configuration as shown in Figure D-1:

```
System CSR and Vectors on 11-JAN-1990 10:43:47.59
Name: PUA Units: 1 Nexus:0 (UBA) CSR: 772150 Vector1 : 774 ...
Name: PTA Units: 1 Nexus:0 (UBA) CSR: 774500 Vector1 : 260 ...
Name: PUB Units: 1 Nexus:0 (UBA) CSR: 760334 Vector1 : 300 ...
Name: TXA Units: 8 Nexus:0 (UBA) CSR: 760500 Vector1 : 310 ...
```

Figure D-1: *SYSGEN* Config File


Note the Nexus number 0 for the specified bus.

- 4 Edit the configuration file to connect the devices by entering the following line at the *SYSGEN* prompt:

```
CONNECT PTC0/ADAPTER=UB0/CSR=%O760444/  
VECTOR=%O340/DRIVER=PUDRIVER
```

- 5 Find the address for the Q-bus by entering *SHOW/UNIBUS*

Figure D-2 shows the address:

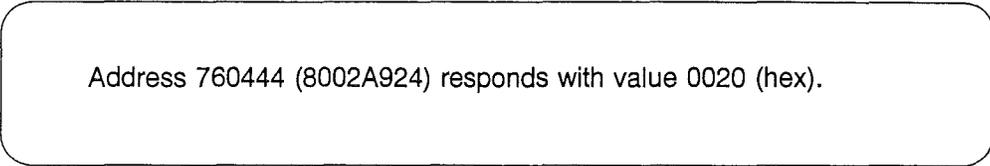

Address 760444 (8002A924) responds with value 0020 (hex).

Figure D-2: Unibus Address

- 6 Note the *SYSIDLOW* value.
- 7 Calculate the *SYSIDHIGH* value by adding 8000 to the NEXUS 0 (which is 8000) and enter the following lines at the *SYSGEN* prompt:

```
CONNECT MUC0/NOADAPTER/SYSIDHIGH=%X8000/  
SYSIDLOW=%X8002A924/DRIVER=TUDRIVER
```

**EXIT* (CONTROL Z to exit)*

Index

- !
- 18- or 22-bit addressing 2-1, 2-5, 3-6
- A**
 - Adaptive DMA 3-7
 - Adaptive DMA Dwell Time 3-8
 - Asynchronous 3-9
- B**
 - Block Mode DMA 2-1, 3-7
 - Bootstrap 2-5, 3-6
- C**
 - Changing LUN offset 4-6
 - Command Queuing 2-1, 2-5
 - Configuration
 - Configuration file 3-1, D-1 to D-3
 - Hardware 3-3, 3-6 to 3-9
 - Software 4-20, 4-25, 4-27 to 4-28
 - Conventions] 1-2
 - CQD-220A models 2-2
 - CQD-220A/M/T
 - Configuring for disk or tape 3-6
 - CSR addresses 2-6, 3-1 to 3-4, C-1, C-5 to C-8
- D**
 - Differential signals 5-7
 - Disk Auto Boot 3-6
 - Disk devices
 - Configuring CQD-220A/M/T 3-6
 - DMA Dwell Time 3-7 to 3-8
 - DMA transfer 2-1
 - DU/MU drivers 2-1, 2-5
 - DU/TU drivers D-3
 - Dynamic Defect Management 2-1, 2-5
- E**
 - Eprom Size 3-10
- F**
 - Formatting RCT block 4-16
- I**
 - Initiator 5-1
 - Installation 3-11 to 3-14
 - Interrupt level 3-7
- J**
 - Jumper settings C-1, C-4 to C-6, C-8
- L**
 - LED indicators 2-3, 2-5, B-3
 - LUN 2-2, 4-6, 4-18 to 4-19, 5-1
- M**
 - Mounting Slot Selection 3-12
 - MSCP 3-7, 4-6, 4-21, 5-1, A-3
 - Multi-hosting 2-2, 2-4 to 2-5, 4-20
- N**
 - Non-volatile RAM 2-2
- O**
 - On-Board Utility 2-2, 3-9, 4-1 to 4-2, 4-4 to 4-9, 4-11, 4-13 to 4-17, 4-20, 4-22 to 4-24
 - Accessing 4-1, 4-6

- Additional Utilities 4-9 to 4-11, 4-13 to 4-15, 4-17 to 4-19, 4-22
- Change configuration 3-12
- Completing 4-17
- Configuring LUN offset 4-6
- Configuring the device 4-9 to 4-11, 4-13 to 4-14, 4-17
- Format Command 5-2
- Manually replacing bad sectors 4-8
- Qualifying the drive 4-8
- Operating systems
 - ULTRIX 4-25, 4-27 to 4-28
 - VMS 4-21
- Operating temperature 2-6
- P**
- Partitioning 2-4
- S**
- SCSI bus 2-2
- SCSI bus termination 3-13, 3-16
- SCSI cabling 3-13 to 3-14, B-3
- SCSI commands 5-2
- SCSI glossary 5-1
- SCSI ID 3-12, 4-18 to 4-19
 - Host Adapter 3-12, C-3
 - Target devices 3-12
- SCSI status codes 5-3
- SCSIformat ON-LINE 2-5, 3-9
- Sending SCSI commands to the device 4-15
- Single-ended mode 4-21
- Single-ended signals 5-4 to 5-5
- Special Features 2-4 to 2-5
- Specifications 2-5
- Supported devices 2-6, A-1 to A-3
- Supported Operating Systems A-3
- SW3-10 3-6
- Synchronous/Asynchronous 2-1 to 2-2, 3-9
- SYSGEN Utility 3-1 to 3-3, D-1 to D-3
- T**
- Tape devices
 - Configuring CQD-220A/M/T 3-6
- Tape Fast Search 3-8
- Tape Monitor Utility 2-4 to 2-5, 3-9
- Target 3-12, 5-2
- Technical Support B-4
- Termination 3-13
- Terminator power 3-14
- Testing SCSI devices 4-15
- TMSCP 5-1, A-3
- Troubleshooting B-1 to B-4
- U**
- ULTRIX 2-1, A-3
- Unit Numbering 4-17 to 4-19
- UNIX 2-1, A-3
- V**
- Virtual data buffer 2-1, 2-5
- VMS 2-1, A-3, D-1
- VMS Analyze/Error Utility B-1 to B-3
- W**
- Wait State 3-11

CQD-220A Quick Reference Guide

I. Determining CSR Address

Before you install the CQD-220A SCSI host adapter under the VMS operating system you must determine the Control and Status Register (CSR) address from which the CQD-220A will be accessed.

For the CQD-220A/M/T, only one CSR address is required. For the CQD-220A/TM, two CSR addresses are required. The following procedure shows one method of determining the new CSR address to be used for the CQD-220A.

Do not install the new CQD-220A in the system now.

- 1 Boot the VMS system and log into the system manager account.
- 2 At the DCL \$ prompt, enter *MC SYSGEN*.
- 3 At the prompt *SYSGEN*, enter *SHOW/CONFIG*. The *SYSGEN* Utility will display all the device controllers installed in the system and their corresponding CSR addresses and vectors. Make a note of this list.
- 4 At the prompt *SYSGEN*, enter *CONFIG*. This will bring you to the *DEVICE* prompt.
- 5 At the prompt *DEVICE*, enter the following for your CQD-220A [enter all devices on the Q-bus, not just the new device being added at present]:

CQD-220A/M/T (disk)	enter <i>UDA, X</i>
CQD-220A/M/T (tape)	enter <i>TU81, Y</i>
For CQD-220A/TM	enter <i>UDA, X</i> and <i>TU81, Y</i>

where

X is the number of installed *UDA* type controllers plus 1 (for new one being added)
Y is the number of installed *TU81* type controllers plus 1 (for new one being added).

- 6 At the prompt *DEVICE*, enter [CTRL] + Z. The *SYSGEN* Utility will display the CSR addresses for all the controllers. Make sure that no other vectors or CSR addresses have changed; if they have, make the appropriate changes to the devices.

The VMS mnemonic for MSCP disk controllers are *PUA, PUB, PUC*, etc. The VMS mnemonic for TMSCP tape controllers are *PTA, PTB, PTC*, etc. For other mnemonics, refer to VMS system manager's guide.

- 7 At the prompt *SYSGEN*, enter [CTRL] + Z to exit the *SYSGEN* Utility. VMS will automatically program the CQD-220A's interrupt vector register to match the vector assigned by the system. The vectors of the controllers might change when the CQD-220A is added to the system; see manufacturer's documentation to configure vectors and device CSR addresses if hardware selectable.

II. CSR Address Selection

Use the CSR address obtained above to configure the CSR jumper settings of the CQD-220A as shown in Tables 1-4. Refer to Appendix C, CQD-220A User's Manual for complete CSR jumper settings.

Table 1 CQD-220A CSR Settings for Disk

Add	LSI-11	MicroVAX	SW2 -1	SW2 -2	SW2 -3	SW2 -4	SW2 -5
1	17772150	20001468	ON	ON	ON	ON	ON
2	17760334	200000DC	ON	ON	ON	ON	OFF
3	17760354	200000EC	ON	ON	ON	OFF	ON
4	17760374	200000FC	ON	ON	ON	OFF	OFF
5	17760340	200000E0	ON	ON	OFF	ON	ON
6	17760344	200000E4	ON	ON	OFF	ON	OFF
7	17760350	200000E8	ON	ON	OFF	OFF	ON
8	17760360	200000F0	ON	ON	OFF	OFF	OFF
Disable when no disks installed			OFF	OFF	OFF	OFF	OFF

Table 2 CQD-220A CSR Settings for Tape

Add	LSI-11	MicroVAX	SW2 -6	SW2 -7	SW2 -8	SW2 -9	SW2 -10
1	17774500	20001940	ON	ON	ON	ON	ON
2	17760404	20000104	ON	ON	ON	ON	OFF
3	17760444	20000124	ON	ON	ON	OFF	ON
4	17760504	20000144	ON	ON	ON	OFF	OFF
5	17760544	20000164	ON	ON	OFF	ON	ON
6	17760410	20000108	ON	ON	OFF	ON	OFF
7	17760450	20000128	ON	ON	OFF	OFF	ON
8	17760454	2000012C	ON	ON	OFF	OFF	OFF
Disable when no tapes installed			OFF	OFF	OFF	OFF	OFF

III. Installation

- 1 Configure the hardware as explained in "Hardware Configuration" Chapter 3. [Normally, you do not need to change the factory jumper settings for the CQD-220A.] Be sure you have set the CSR addresses as described in Parts I and II and you have the correct Pal installed.

Table 3 CQD-220A Models & Pals

Model	Use	Pal in U30
CQD-220A/TM	Disk and Tape	P220A01A
CQD-220A/M/T	Disk or Tape	P220A08A

- 2 For the CQD-220A/M/T set SW3-10 to "OFF" if you are connecting disk devices or "ON" if you are connecting tape devices.
- 3 For the CQD-220A/TM, set the Device SCSI ID's TO SCSI ID=0-3 disks, SCSI ID=4-6 for tapes. If you are changing this factory setting, refer to Chapter 4, "Unit Numbering."
- 4 Install the CQD-220A into a slot of the standard Q-Bus backplane and make sure the Q-Bus interrupt acknowledge/DMA grant daisy chain is not broken.
- 5 Cable SCSI devices (see "SCSI Bus Cabling," Chapter 3) to the SCSI connector at J1, see Figures 1, 2 and 3.
- 6 Terminate the SCSI bus at each physical end. If the CQD-220A is at one physical end of the bus, place terminators as shown in Table 3.

NOTE Be sure your board is correctly configured to your specification of single-ended or differential before installing terminator power

Table 5 SCSI Termination Option

RP1, RP3	IN	Termination enabled
RP1, RP3	OUT	NO termination

If TERMPWR is needed for the bus, place jumper shunt on W2 as shown in Table 6.

Table 6 Terminator Power Option

W2	IN	SCSI terminator power enabled (F)
W2	OUT	SCSI terminator power disabled

- 7 Power up the system and execute On-Board Utility to scan for the SCSI devices and assure that all devices are seen and functioning properly (see Chapter 4 for On-Board Utility).
- 8 Boot the system and test with the operating system.

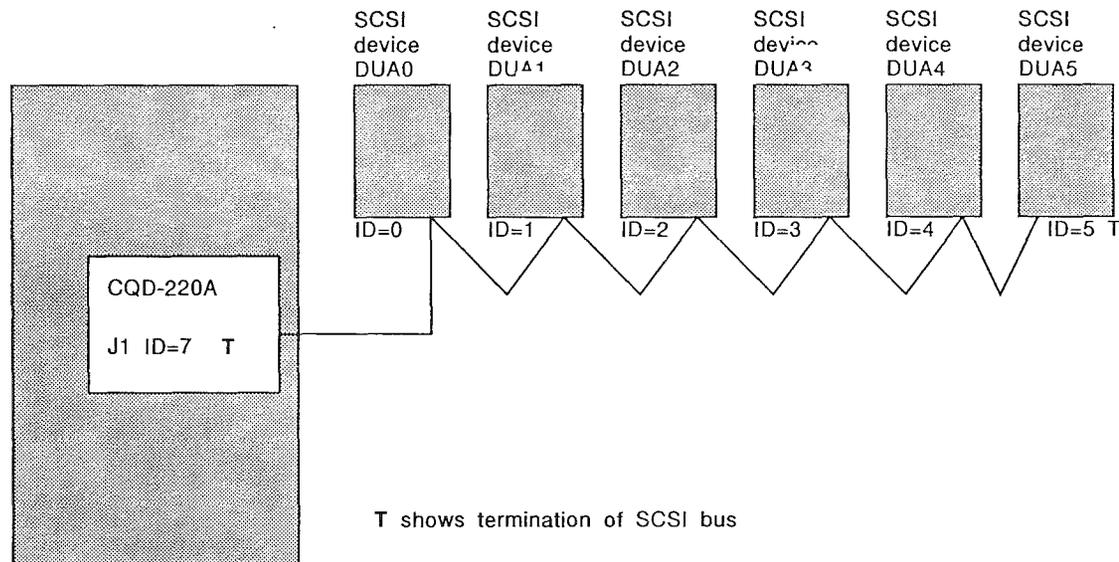


Figure 1: SCSI ID and Cabling

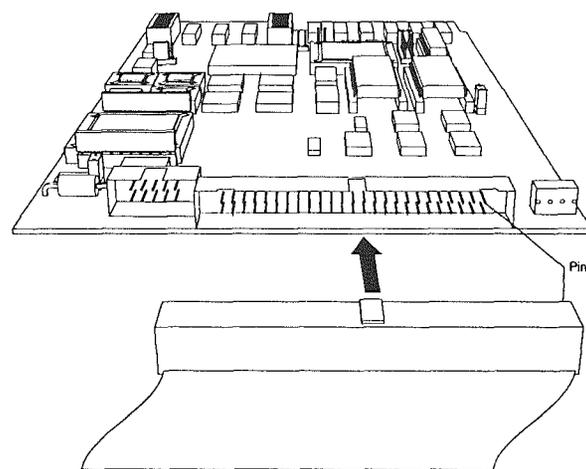


Figure 2: CQD-220A SCSI port (J1)

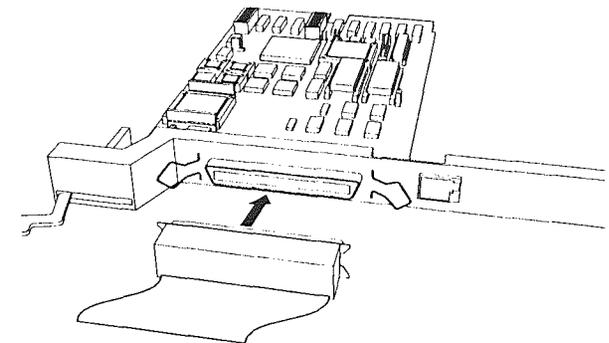


Figure 3: CQD-223A shielded connection

If you wish to contact CMD Technology for any reason concerning CMD Warranty Service, please call at (714) 454-0800 or send a letter to:

CMD Technology, Inc.
Customer Service Department
1 Vanderbilt
Irvine, CA 92718

Product _____


Model Number _____

Serial Number _____ **Rev.** _____

Purchase Date _____

Purchased From (Dealer) _____

Please retain proof of purchase/sales receipt to verify CMD Warranty.



NO POSTAGE
NECESSARY IF
MAILED IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS MAIL PERMIT NO. 10814 IRVINE, CA

POSTAGE WILL BE PAID BY ADDRESSEE



Customer Service Dept.
1 Vanderbilt
Irvine, CA 92718-9714



WARRANTY REGISTRATION CARD

The warranty on your CMD computer products and/or software is activated when the questions on this card have been filled out completely and this card has been received by CMD.

Product _____ Model Number _____ Serial Number _____ Rev. _____

Identification (please provide company information if the system was purchased for your work place.)

Your name _____ Title _____

Company _____ Dept. _____

Address _____

City _____ State/Province _____

Country _____ Day time phone _____

Authorized Reseller _____ Purchase date _____

What prompted you to buy CMD products?

- | | | |
|--|----------------|---|
| <input type="checkbox"/> Advertisement | Magazine _____ | <input type="checkbox"/> Dealer Recommendation |
| <input type="checkbox"/> Article | Magazine _____ | <input type="checkbox"/> Referral |
| <input type="checkbox"/> CMD Competitive Price | | <input type="checkbox"/> CMD Quality Name Recognition |

What computer did you purchase the product for? _____