

LP2980, LP2981, LP2982, LP2985 Micro SMD Demo Boards

National Semiconductor
Application Note 1172
Chester Simpson
July 2000




Abstract

This document describes the characteristics of the demo board designed for use with the micro SMD versions of National's LP298X low dropout regulators.


The components of each demo board vary by device type and voltage option. Lists of materials are provided which specify the correct external components to be used with each NSC part type.

It should be noted that the noise bypass capacitor is only used on the LP2982 and LP2985. Demo boards for other parts types will not have a component installed at this location.

Care must be taken so that the input voltage is not raised above 10V, since a 10V ceramic capacitor is called out for use at the C_{IN} location.

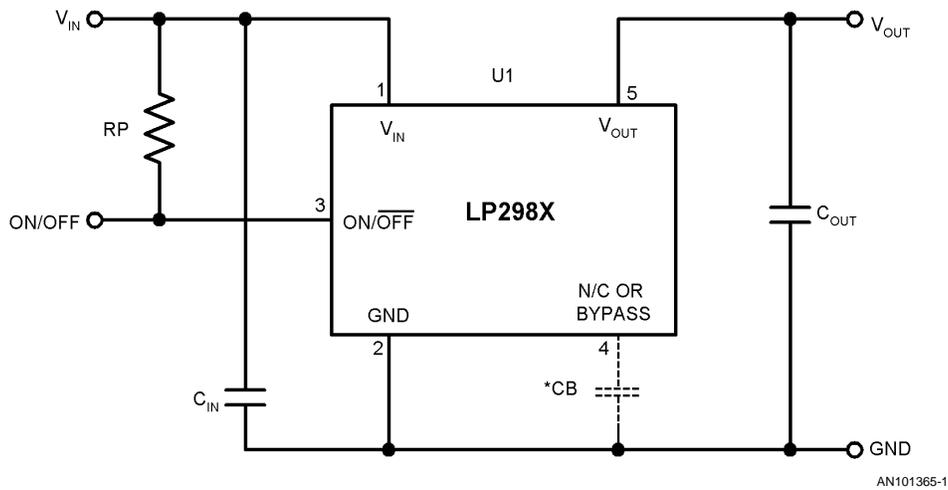

Schematic Diagram

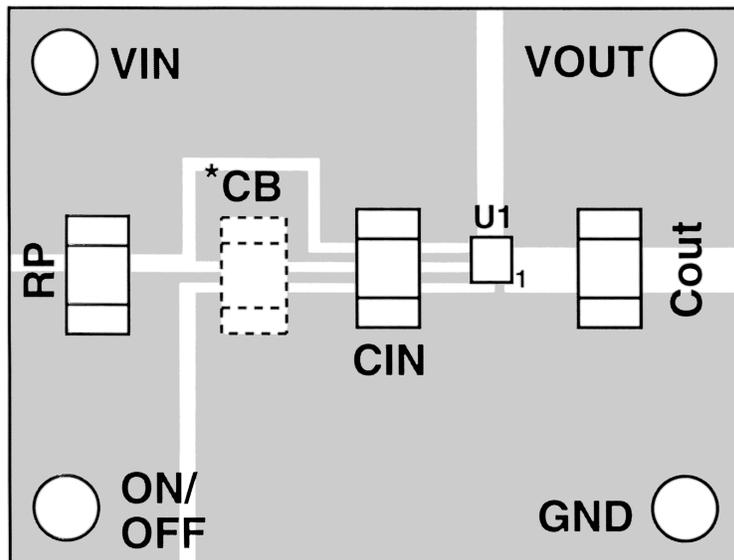

Demo Board (Top View)

*Used only On Low-Noise parts LP2982 and LP2985

List Of Materials

Components Common To All Board Assemblies:

Quantity	Description	Ref Designator
1	LP298X Micro SMD PCB Etch 001	
1	Ceramic Cap, 1 μ F, 10V X7R (1206)	C _{IN}
4	Terminal, Uninsulated 0.094" IPI Cambion P/N 160-1026-02-01-00	V _{IN} , V _{OUT} , GND, ON/OFF
1	Resistor, 10K, 1/8W %5 (1206)	RP

Components Which Vary By part Type And/Or Voltage Option:

LP2980-4.5 Through LP2980-5.0

Quantity	Description	Ref Designator
1	LP2980-X.X Micro SMD Device	U1
1	Tantalum Cap, 2.2 μ F, 10V	C _{OUT}
1	Not Used	CB

LP2980-3.1 Through LP2980-4.4

Quantity	Description	Ref Designator
1	LP2980-X.X Micro SMD Device	U1
1	Tantalum Cap, 4.7 μ F, 6V	C _{OUT}
1	Not Used	CB

LP2980-1.5 Through LP2980-3.0

Quantity	Description	Ref Designator
1	LP2980-X.X Micro SMD Device	U1
1	Tantalum Cap, 10 μ F, 6V	C _{OUT}
1	Not Used	CB

LP2981-4.5 Through LP2981-5.0

Quantity	Description	Ref Designator
1	LP2981-X.X Micro SMD Device	U1
1	Tantalum Cap, 2.2 μ F, 10V	C _{OUT}
1	Not Used	CB

LP2981-3.1 Through LP2981-4.4

Quantity	Description	Ref Designator
1	LP2981-X.X Micro SMD Device	U1
1	Tantalum Cap, 4.7 μ F, 6V	C _{OUT}
1	Not Used	CB

LP2981-1.5 Through LP2981-3.0

Quantity	Description	Ref Designator
1	LP2981-X.X Micro SMD Device	U1
1	Tantalum Cap, 10 μ F, 6V	C _{OUT}
1	Not Used	CB

LP2982-4.5 Through LP2982-5.0

Quantity	Description	Ref Designator
1	LP2982-X.X Micro SMD Device	U1

LP2982-4.5 Through LP2982-5.0 (Continued)

Quantity	Description	Ref Designator
1	Tantalum Cap, 2.2 μ F, 10V	C _{OUT}
1	Ceramic Cap, .01 μ F, X7R or COG	CB

LP2982-3.1 Through LP2982-4.4

Quantity	Description	Ref Designator
1	LP2982-X.X Micro SMD Device	U1
1	Tantalum Cap, 4.7 μ F, 6V	C _{OUT}
1	Ceramic Cap, .01 μ F, X7R or COG	CB

LP2982-1.5 Through LP2982-3.0

Quantity	Description	Ref Designator
1	LP2982-X.X Micro SMD Device	U1
1	Tantalum Cap, 10 μ F, 6V	C _{OUT}
1	Ceramic Cap, .01 μ F, X7R or COG	CB

LP2985-4.5 Through LP2985-5.0

Quantity	Description	Ref Designator
1	LP2985-X.X Micro SMD Device	U1
1	Tantalum Cap, 2.2 μ F, 10V	C _{OUT}
1	Ceramic Cap, .01 μ F, X7R or COG	CB

LP2985-3.1 Through LP2985-4.4

Quantity	Description	Ref Designator
1	LP2985-X.X Micro SMD Device	U1
1	Tantalum Cap, 4.7 μ F, 6V	C _{OUT}
1	Ceramic Cap, .01 μ F, X7R or COG	CB

LP2985-1.5 Through LP2985-3.0

Quantity	Description	Ref Designator
1	LP2985-X.X Micro SMD Device	U1
1	Tantalum Cap, 10 μ F, 6V	C _{OUT}
1	Ceramic Cap, .01 μ F, X7R or COG	CB

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
Americas
Tel: 1-800-272-9959
Fax: 1-800-737-7018
Email: support@nsc.com
www.national.com

National Semiconductor Europe
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor Asia Pacific Customer Response Group
Tel: 65-2544466
Fax: 65-2504466
Email: ap.support@nsc.com

National Semiconductor Japan Ltd.
Tel: 81-3-5639-7560
Fax: 81-3-5639-7507