


ADDS-3320

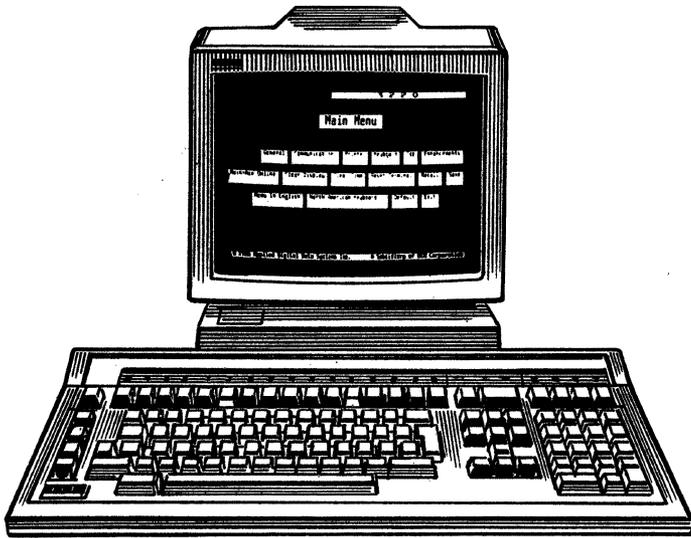

- ▶ 14" flat-screen, green CRT etched for reduced glare
- ▶ 70 Hz refresh rate—no flicker, stable normal/reverse video
- ▶ Selectable 24 lines × 80 or 132 columns
- ▶ Split screen capable
- ▶ Forms 7 × 11 character with 2 descenders—80 or 132 columns
- ▶ 10 × 14—80 columns; 9 × 14—132 columns character cell
- ▶ Normal, reverse, blink, underline, bold character highlights
- ▶ Select character highlights in any combination (non-stored)
- ▶ Cursor selectable as underline/block; blink/steady/suppress
- ▶ Double high and double high/wide character presentation
- ▶ Screen saver—user selectable
- ▶ Smooth 4-speed scroll

Fully compatible with the DEC VT220*, VT100*, VT52* and ANSI x3.64, the ADDS 3320 video display terminal introduces a new standard in DEC compatibility. With 256 bytes of non-volatile memory, local programmability, 7 additional keys, and 22 dynamically-allocated function keys, the 3200 keyboard adds more fingertip usability. Ergonomical, low-profile design with tactile and audible feedback as well as 2-position tilt provide operator comfort. A legend strip is provided for labeling of function keys. Included in 5 character sets are multi-language letters and symbols, line graphics, and special symbols for greater versatility.

Specifications. System/Host: RS-232C serial asynchronous with baud rates from 50 to 19.2 K; X/On-Off and/or DTR handshake; 7 or 8 data bits; odd/even/mark/space/none parity; character mode with full or half duplex and local echo. Female DB-25 connector. **Auxiliary:** Buffered, bidirectional RS-232C serial asynchronous with baud rates from 110 to 19.2 K; X/On-Off or DTR handshake; 7 or 8 data bits; odd/even/mark/space/none parity; copy or passthrough connection. Local screen print. Male DB-25 connector. Auxiliary port can be used to connect a second host (A/B switch). **Voltage:** 100 to 130 VAC, 200 to 250 VAC (jumper selectable). **Line Frequency:** 50/60 Hz. **Power:** 48 watts. **Operating Environment. Temperature:** 10 to 40°C (50 to 105°F). **Relative Humidity:** 0 to 95%, non-condensing. **Altitude:** 2.5 km (8,200 ft.). **Storage Environment. Temperature:** 0 to 50°C (32 to 125°F). **Relative Humidity:** 0 to 95%, non-condensing. **Altitude:** 9.1 km (29,850 ft.). **Dimensions. Monitor/Logic:** 14 × 12.8 × 13.2" (35.89 × 32.82 × 33.84 cm). **Keyboard:** 2 × 21 × 8" (5.12 × 53.85 × 20.51 cm). **Weight. Monitor/Logic:** 25 lbs., 12 oz. (56.77 kg). **Keyboard:** 5 lbs. (11 kg). **Approximate Shipping Weight:** 32 lbs. (70.5 kg). *Trademarks of Digital Equipment Corporation. **892-3220** **EACH 595.00**

ADDS-2020

- ▶ 14" flat-screen, green CRT etched for reduced glare
- ▶ 70 Hz refresh rate—no flicker, stable normal/reverse video
- ▶ Selectable 26 lines × 80 or 132 columns
- ▶ User selectable screen
- ▶ Forms 7 × 11 character with 2 descenders—80 or 132 columns
- ▶ 10 × 13—80 columns; 9 × 13—132 columns character cell
- ▶ Normal, reverse, blink, underline, bold character highlights
- ▶ Select character highlights in any combination (non-stored)
- ▶ Cursor selectable as underline/block; blink/steady/suppress
- ▶ Double high and double high/wide character presentation
- ▶ Top status and bottom label lines
- ▶ Smooth 4-speed scroll

Compatible with ADDS Viewpoint A1/A2*, Regent 40*, Hazeltine 1500*, TeleVideo 925*, 920*, and 910*, and Wyse 50*—all with enhancement modes. 96-character ASCII set plus single and double line graphics; normal, reverse, blink, underline, half, and suppress tag/field highlights. Up, down, insert/delete line scroll. 100-key keyboard standard with 44 programmable keys; 16/32 programmable function keys; 28/56 reprogrammable edit keys—88 programmable key modes supported by over 2500 characters of non-volatile memory with setup accessible from keyboard or host. Programmable menu system stores function key labels and help messages; bell volume is also programmable from keyboard or host. Keyboard has US/UK English layout and is low profile with tactile and audible feedback, 2-position tilt, and legend strip.

Specifications. System/Host: RS-232C serial asynchronous with baud rates from 50 to 38.4 K; X/On-Off and/or DTR handshake; 7 or 8 data bits; parity selectable; character, line, and page modes with full or half duplex and local echo. Female DB-25 connector. **Serial Printer Port:** Buffered, bidirectional, RS-232C serial asynchronous with baud rates from 110 to 19.2 K; X/On-Off and/or DTR handshake; 7 or 8 data bits; parity selectable; copy or passthrough connection with local display capability. Female DB-25 connector. **Parallel Printer Port:** Buffered, electrically compatible with Centronics* and IBM PC* parallel printers; shares DB-25 with serial printer port. **Voltage:** 100 to 130 VAC, 200 to 250 VAC (jumper selectable). **Line Frequency:** 50/60 Hz. **Power:** 48 watts. **Operating Environment. Temperature:** 10 to 40°C (50 to 105°F). **Relative Humidity:** 0 to 95%, non-condensing. **Altitude:** 2.5 km (8,200 ft.). **Storage Environment. Temperature:** 0 to 50°C (32 to 105°F). **Relative Humidity:** 0 to 95%, non-condensing. **Altitude:** 9.1 km (29,850 ft.). **Dimensions. Monitor/Logic:** 14 × 12.8 × 13.2" (35.89 × 32.82 × 33.84 cm). **Keyboard:** 2 × 18.25 × 8" (5.12 × 46.79 × 20.51 cm). **Weight. Monitor/Logic:** 25 lbs., 8 oz. (56.22 kg). **Keyboard:** 4 lbs., 6 oz. (9.65 kg). **Approximate Shipping Weight:** 32 lbs. (70.5 kg). **892-2020** **EACH 595.00**

*Trademarks: IBM PC is a registered trademark of International Business Machines Corporation. Lotus is a registered trademark of Lotus Development Corporation. ADDS Viewpoint and Regent 40 are registered trademarks of Applied Digital Data Systems, Inc. Hazeltine 1500 is a registered trademark of Hazeltine Corporation. TeleVideo 925, 920 and 910 are registered trademarks of TeleVideo Systems, Inc. Wyse 50 is a registered trademark of Wyse Technology. Centronics is a registered trademark of Centronics Data Computer Corporation.



ADDS-1010

You have both brightness and contrast controls, screen saver and smooth scroll. Visual attributes let you display your data more distinctly with normal, reverse, half, blink, underline, and zero formats. 14" flat-screen, green, etched for reduced glare. 24 lines/80 characters. 7 by 9 in 9 by 13 character matrix. 25th status line. Block or underline, blinking, or steady cursor. ADDS Viewpoint/A1, A2, 3A +, Viewpoint/+, Lear Siegler ADM 3A. Separate contrast and brightness controls; parallel printer port; international languages; 120 characters of non-volatile memory. 83 key, separate cursor cluster. Enter key on numeric pad, 6 shiftable to 12 programmable function keys. RS-232C, full or half duplex, 110 to 19,200 baud. IBM PC® compatible parallel port. **Dimensions. Monitor/Logic:** 12.4"H × 12.5"W × 12.5"D (31.5 × 31.75 × 31.75 cm). **Keyboard:** 1.3"H × 18.4"W × 6.0"D (3.30 × 46.74 × 15.24 cm). **Shipping Weight:** 33 lbs.

892-1010 **EACH 395.00**

