


The Model 4080-COMPAT is a Z80-based CRT terminal; it is software-compatible with the Ann Arbor K4080D terminal. The standard version displays 3200 upper/lower case characters in a 40 x 80 format and includes keyboard-selectable baud rates from 110 to 9600 and three character accents. All control and command functions may be executed from the keyboard; these include cursor positioning, setting the accent register, changing baud rate, input/output mode, display and keyboard modes. The Model 4080-Compat also has many "extras" such as a detachable keyboard, Return key easily reachable by a typist, and 15-inch non-glare screen. Available cases include the E-Case (standard), which may be rack-mounted using an optional panel, and D-Case, which is a larger, more streamlined design. The unit may also be purchased without the case for easy mounting in the user's console. Please contact Ann Arbor Terminals for more information.

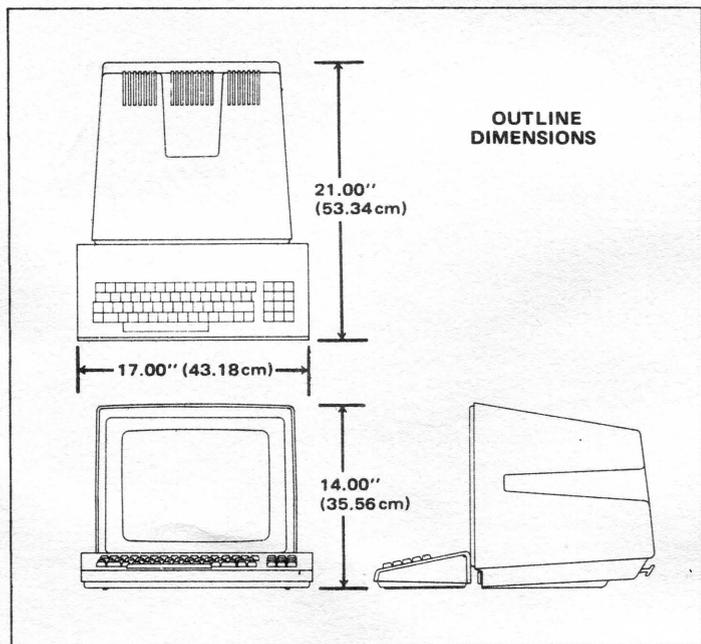

BASIC SPECS

Display Format	80 characters x 40 lines
Screen	15-inch diagonal, P39 phosphor
Character Set	95-character ASCII (upper/lower case)
Character Shape	7x7 dot matrix in 10x10 dot field
Character Accents	Blink, dim and reverse-video
Data Interface	RS232-compatible
Baud Rates	110-9600, selectable from keyboard
Keyboard	Full-ASCII with separate numeric pad and cursor controls
Weight	35 lbs.

CONTROLS

Baud Rate	110-9600
I/O	Local, full or half-duplex
Display	Roll or page
Keyboard	TTY or full-ASCII

COMMANDS

Erase Memory
Cursor home, return, up, down, right or left
Set cursor position
Set character accent

OPTIONS

Part Number	Description
208600	MODEL 4080-COMPAT
208600.94	D-Case
208600.20	Auto LF on CR
208600.21	Hold at EOL
208600.22	Del _____
208600.98	50 Hz Refresh
205279.98	230 VAC Power
205275.01	Omit Keyboard
205275.10	Function Keys
201179.11	Parity Xmit
201169.29	Bell
205271	RS232 cable
205244	Current-loop cable
205290	Rack Panel