


The Model 531E is a microprocessor-based CRT terminal; it is software-compatible with the Ann Arbor K2480 Batch terminal. The standard version displays 1920 upper/lower case characters in a 24 x 80 format. It includes three character accents, formatted data entry, buffered printer output, and line and character editing with an 82-key detachable keyboard. All the control and command functions can be executed from the keyboard. These include cursor positioning, setting the accent register, changing baud rate, input/output mode, display and keyboard modes. The Model 531E also has many "extras" such as the 15-inch non-glare screen, auxiliary video output, individual cursor and edit keys, and flexibility in cases and options available. Please contact Ann Arbor Terminals for more information.

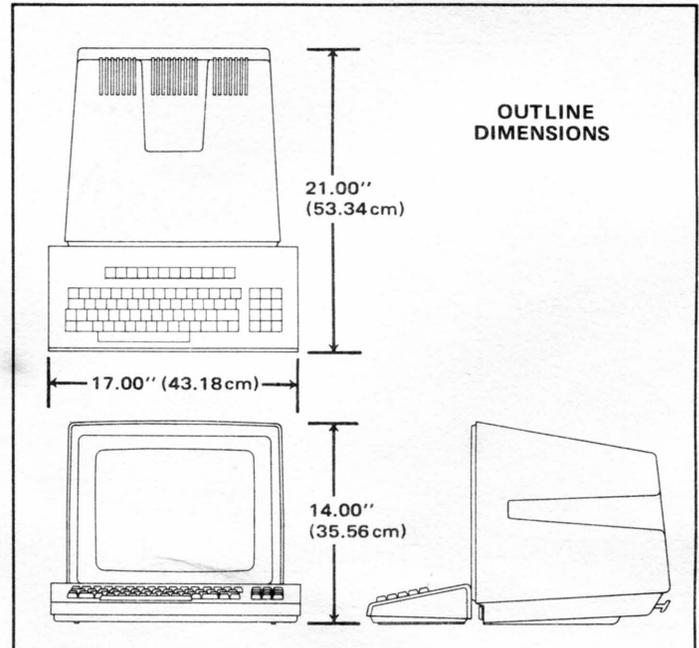

BASIC SPECS

Display Format	80 characters x 24 lines
Screen	15" diagonal
Character Set	95-character ASCII
Character Accents	Blink, dim, reverse-video
Cursor	Blinking field
Data Interface	RS232-compatible
Baud Rates	110-9600, selectable from keyboard
Keyboard	Full-ASCII with cursor controls, TTY-lock, separate numeric pad and 12 function keys
Weight	35 lbs.

CONTROLS

Display	Page, Roll
Send Rate	110 to 9600
I/O	Local, Full, Half-Duplex
Print Rate	110 to 9600
Keyboard	TTY, Full-ASCII

COMMANDS

Erase memory, line or page
 Cursor home, return, up, down, right or left
 Set cursor position
 Tab
 Set character accent
 Insert/Delete line or character
 Set protect, print, enter or KSR
 Send page

OPTIONS

Part Number	Description
208531	Model 531E Terminal
208531.94	D-Case
201179.02	40-Char Line
201179.11	Parity Xmit
201179.20	Auto LF on CR
201179.21	Hold at EOL
201169.29	Bell
201179.98	50 Hz Refresh
205279.98	230 VAC Power
201163.10	Function Keys
208531.90	Omit Keyboard
205295	Port Extender Cable
205271	RS232 Cable
205244	Current-loop Cable
205290	Rack Panel