


## MVME2600

### VME Processor Modules

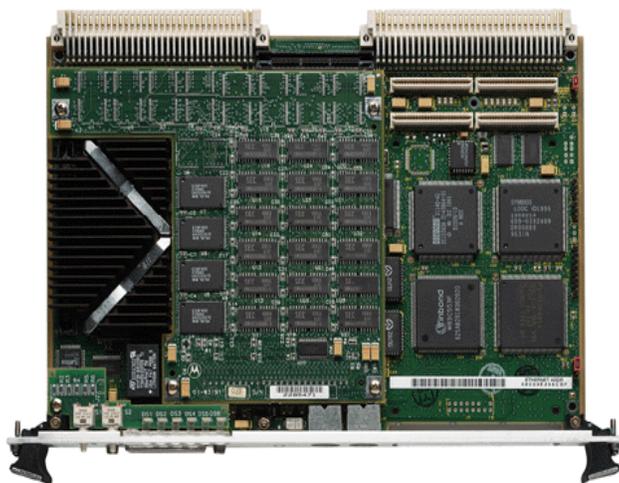


- ◆ PowerPC 603™ or PowerPC 604™ 32-bit microprocessor
- ◆ L1 cache—16KB/16KB on PowerPC 603, 32KB/32KB on PowerPC 604
- ◆ 256KB L2 cache
- ◆ Up to 512MB ECC DRAM using RAM200 memory expansion modules
- ◆ 8MB on-board Flash, 1MB socketed
- ◆ 64-bit PCI mezzanine connector
- ◆ On-board debug monitor with self-test diagnostics
- ◆ IEEE P1386.1 compatible 32/64-bit PMC expansion slot
- ◆ 2 or 3 async, 1 or 2 sync/async serial ports
- ◆ Ethernet transceiver interface with 32-bit PCI local bus DMA
- ◆ 8- or 16-bit Fast SCSI-2 bus interface
- ◆ Parallel, floppy, keyboard and mouse interfaces
- ◆ 8KB x 8 NVRAM and time-of-day clock with replaceable battery backup
- ◆ Four 32-bit timers, one watchdog timer

#### PMC expansion combined with a high-performance VME processor

The MVME2600 Series is a family of VME processor modules based on the Motorola PowerPlus VME architecture with PowerPC® microprocessors that push performance and functionality to limits unprecedented on VME. The flexibility of the MVME2600 provides an excellent base platform that can be quickly and easily customized for a variety of industry-specific applications.

Designed to meet the needs of military and aerospace, industrial automation, and medical, MVME2600 applies to a variety of applications. DRAM expansion mezzanines enable memory upgrades to the maximum 512MB of ECC DRAM without requiring additional VME slots.

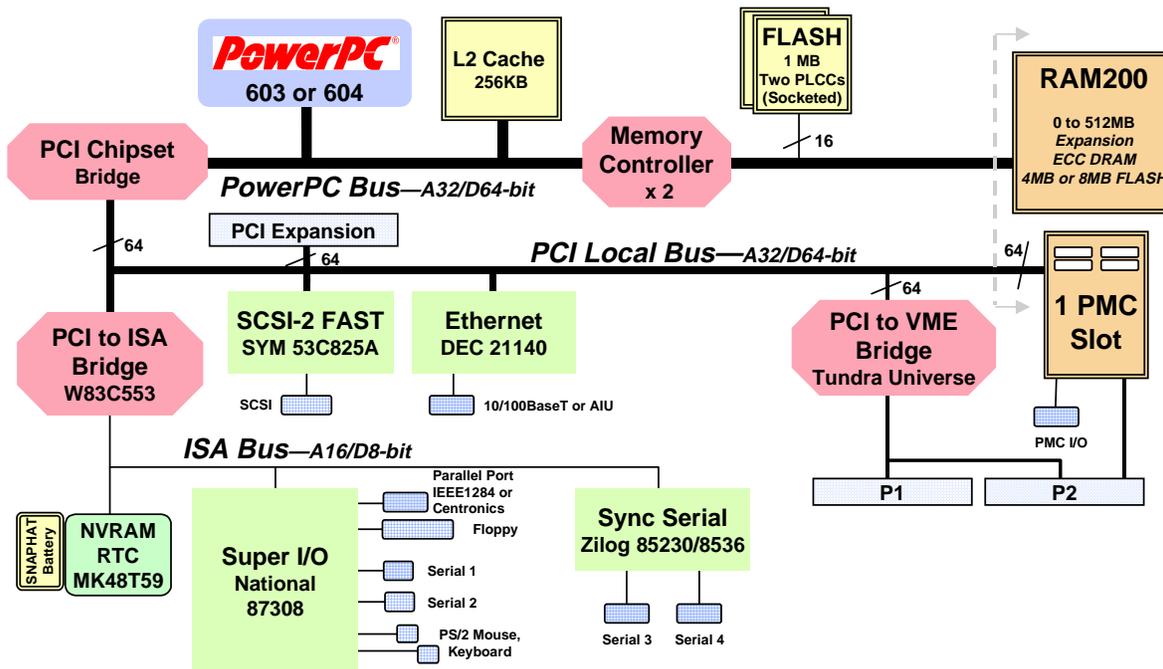

## MVME2600 Details

### PCI Expansion

MVME2600 modules have a 64-bit PCI connection to support PCI expansion carriers such as Motorola PMCspan. Design details for the connector and electrical specifications are available from your local Motorola representative.

### Memory Modules

The MVME2600 series has a modular memory design. Mezzanine arrays support up to 512MB of add-on DRAM. These RAM200 expansion modules allow field upgrades of the memory capacity and do not require additional VME slots.

### Transition Modules

Two artwork variants of the MVME2600 are available. One series provides backward compatibility with the MVME712M transition module I/O. The other series accepts the MVME761 transition module that features an additional sync/async serial port, a 10/100BaseT interface, Fast 16-bit SCSI, and an IEEE 1284 compatible parallel port.

#### MVME761

The MVME761 transition module provides industry-standard connector access to the IEEE 1284 parallel port, a 10BaseT or 100BaseT port via an RJ-45 connector, two DB-9 connectors providing access to the asynchronous serial ports configured as EIA-574 DTE, and two HD-26 connectors providing access to the sync/async serial ports. These serial ports, labeled as Serial 3 and Serial 4 on the face plate of the MVME761, are individually user configurable as EIA-232,

EIA-530, V.35, or X.21 DCE or DTE via the installation of Motorola Serial Interface Modules (SIMs).

A P2 adapter provides interface module signals to the MVME761 transition module. The 3-row P2 adapter can be used for 8-bit SCSI. A 5-row P2 adapter supports 16-bit SCSI and PMC I/O.

#### MVME712M

The MVME712M transition module provides industry-standard connector access to the Centronics® parallel port, an AUI port, and four DB-25 connectors providing access to the asynchronous/synchronous serial ports jumper configurable as EIA-232 DCE or DTE. A P2 adapter provides interface signals to the MVME712M transition module. The 3-row P2 adapter can be used for 8-bit SCSI.

To gain access to the additional user definable I/O pins provided via the 5-row VME64 extension connector, a special P2 adapter board is available. This adapter panel replaces the traditional 3-row P2 adapter and extends its capability by providing access to the PMC I/O pins.

Several other variations of the MVME712M are available for combinations of I/O and connectors.

### Operating Systems and Real-Time Kernels

Motorola Computer Group:	AIX
Integrated Systems, Inc.:	pSOSystem™
Lynx Real-Time Systems, Inc.:	LynxOS™
Microware Systems Corporation:	OS-9®/OS-9000™
Microtec:	VRTX32™
Wind River Systems, Inc.:	VxWorks®

## Firmware Monitor

Firmware must fulfill the traditional functions of test and initialization, in addition to operating system boot support. The MVME2600 firmware monitor exceeds these requirements with a proven monitor from the embedded VME leader. It expands features like power-up tests with extensive diagnostics, as well as a powerful evaluation and debug tool for simple checkout or when high-level development debuggers require additional support. All this is included with the MVME2600 firmware, plus it supports booting both operating systems and kernels.

## Specifications

### Processor

<b>Microprocessor:</b>	MPC603	MPC603	MPC604	MPC604
<b>Clock Frequency:</b>	200 MHz	200 MHz	333 MHz	400 MHz
<b>On-chip Cache (I/D):</b>	16K/16K	16K/16K	TBD	TBD
<b>Memory Type:</b>	60ns FPM	50ns EDO	TBD	TBD
<b>SPECint95, estimated:</b>	5.2	5.3	TBD	TBD
<b>SPECfp95, estimated:</b>	3.7	4.0	TBD	TBD

### Memory

<b>MAIN MEMORY:</b>	Dynamic RAM
<b>Capacity (60ns FPM):</b>	16, 32, or 64MB on RAM200
<b>Capacity (50ns EDO):</b>	128 or 256MB on RAM200
<b>Single Cycle Accesses:</b>	9 Read/4 Write
<b>Read Burst Mode (60ns FPM):</b>	9-1-2-1 idle; 3-1-2-1 aligned page hit
<b>Read Burst Mode (50ns EDO):</b>	8-1-1-1 idle; 2-1-1-1 aligned page hit
<b>Write Burst Mode:</b>	4-1-1-1 idle; 3-1-1-1 aligned page hit
<b>Architecture:</b>	128-bit, two-way interleaved
<b>Parity/ECC:</b>	No/Yes
<b>L2 CACHE:</b>	256KB
<b>Cache Bus Clock Frequency:</b>	Processor clock divided by 2
<b>FLASH:</b>	On-board programmable
<b>Capacity:</b>	1MB via two 32-pin PLCC/CLCC sockets; 8MB surface mount
<b>Read Access (8MB port):</b>	68 clocks (32 byte burst)
<b>Read Access (1MB port):</b>	260 clocks (8 byte burst)
<b>Write Access (1MB/8MB):</b>	19 clocks (2 bytes/8 bytes)
<b>NVRAM:</b>	8KB (4KB available for users)
<b>Cell Storage Life:</b>	50 years at 55° C
<b>Cell Capacity Life:</b>	10 years at 100% duty cycle
<b>Removable Battery:</b>	Yes

### PCI Expansion Connector

<b>Address/Data:</b>	A32/D32/D64
<b>PCI Bus Clock:</b>	33 MHz
<b>Signaling:</b>	5V
<b>Connector:</b>	114-pin connector located on the planar of the MVME2700 between P1 and P2

### VMEbus ANSI/VITA 1-1994 VME64 (IEEE STD 1014)

<b>Controller:</b>	Tundra Universe
<b>DTB Master:</b>	A16-A32; D08-D64, BLT
<b>DTB Slave:</b>	A24-A32; D08-D64, BLT, UAT
<b>Arbiter:</b>	RR/PRI
<b>Interrupt Handler/Generator:</b>	IRQ 1-7/Any one of seven IRQs
<b>System Controller:</b>	Yes, jumperable or auto detect
<b>Location Monitor:</b>	Two, LMA32

### Ethernet Interface

	MVME761	MVME712M
<b>Controller</b>	DEC 21140	DEC 21140
<b>Interface Speed:</b>	10/100Mb/s	AUI (10Mb/s)
<b>PCI Local bus DMA:</b>	Yes, with PCI burst	Yes, with PCI burst
<b>Connector:</b>	Routed to P2, RJ-45 on MVME761	Routed to P2, DB-15 AUI on MVME712M

### SCSI Interface

	MVME761	MVME712M
<b>Controller:</b>	Symbios 53C825A	Symbios 53C825A
<b>PCI Local Bus DMA:</b>	Yes, with PCI local bus burst	Yes, with PCI local bus burst
<b>Asynchronous:</b>	5.0MB/s	5.0MB/s
<b>Synchronous:</b>	10.0MB/s (8-bit mode), 20.0MB/s (16-bit mode)	10.0MB/s (8-bit mode), 20.0MB/s (16-bit mode)
<b>Connector:</b>	Routed to P2, 50- or 68-pin on MVME761EXT	Routed to P2, SCSI D-50 on MVME712M

### Asynchronous Serial Ports

	MVME761	MVME712M
<b>Controller</b>	PC87308	PC87308, 85230/8536
<b>Number of Ports:</b>	Two, 16550 compatible	Two, 16550 compatible and one 85230/8536
<b>Configuration:</b>	EIA-574 DTE	EIA-232 DCE/DTE
<b>Async Baud Rate, bps max.:</b>	38.4K EIA-232, 115Kbps raw	38.4K EIA-232, 115Kbps raw
<b>Connector:</b>	Routed to P2, DB-9 on MVME761	Routed to P2, DB-25 on MVME712M

### Synchronous Serial Ports

	MVME761	MVME712M
<b>Controller</b>	85230/8536	85230/8536
<b>Number of Ports:</b>	Two	One
<b>Configuration:</b>	TTL to P2 (both ports), SIM on MVME761	EIA-232 DCE/DTE
<b>Baud Rate, bps max.:</b>	2.5M sync, 38.4K async	2.5M sync, 38.4K async
<b>Oscillator Clock Rate (PCLK):</b>	10 MHz/5 MHz	10 MHz/5 MHz
<b>Connector:</b>	Routed to P2, HD-26 on MVME761	Routed to P2, DB-25 on MVME712M

## Parallel Port

	MVME761	MVME712M
<b>Controller</b>	PC87308	PC87308
<b>Configuration:</b>	8-bit bidirectional, full IEEE 1284 support; Centronics compatible	8-bit bidirectional, IEEE 1284 minus EPP and ECP
<b>Modes:</b>	Master only	Master only
<b>Connector:</b>	Routed to P2, HD-36 on MVME761	Routed to P2, D-36 on MVME712M

## Counters/Timers

<b>TOD Clock Device:</b>	M48T18; 8KB NVRAM
<b>Real-Time Timers/Counters:</b>	Four, 32-bit programmable
<b>Watchdog Timer:</b>	Time-out generates reset

## Floppy

<b>Controller:</b>	PC87308
<b>Compatible Controllers:</b>	DP8473, 765A, N82077
<b>Configuration:</b>	3.5" 2.88MB and 1.44MB; 5.25" 1.2MB
<b>Connector:</b>	HD-50 on front panel

## Mouse Interface

<b>Controller:</b>	PC87308
<b>Connector:</b>	6-pin circular female mini DIN on front panel

## Keyboard Interface

<b>Controller:</b>	PC87308
<b>Connector:</b>	6-pin circular female mini DIN on front panel

## IEEE P1386.1 PCI Mezzanine Card Slot

<b>Address/Data:</b>	A32/D32/D64, PMC PN1, PN2, PN3, PN4 connectors
<b>PCI Bus Clock:</b>	33 MHz
<b>Signaling:</b>	5V
<b>Power:</b>	+3.3V, +5V, ±12V; 7.5 watts maximum per PMC slot
<b>Module Types:</b>	Basic, single-wide, front panel I/O or P2 I/O (Note: P2 I/O is only accessible to systems equipped for VME64 extension connectors.)

## Board Size

<b>Height:</b>	233.4 mm (9.2 in.)
<b>Depth:</b>	160.0 mm (6.3 in.)
<b>Front Panel Height:</b>	261.8 mm (10.3 in.)
<b>Width:</b>	19.8 mm (0.8 in.)
<b>Max. Component Height:</b>	14.8 mm (0.58 in.)

## Miscellaneous

Reset and abort switches on front panel; six LEDs for FAIL, CHKSTP, CPU, PCI, SCON, and FUSE

## Transition Modules

## I/O Connectors

	MVME761	MVME712M
<b>Asynchronous Serial Ports:</b>	Two, DB-9 labeled as COM1 and COM2	Three, DB-25 labeled as Serial 1, Serial 2, and Serial 3
<b>Synchronous Serial Ports:</b>	Two, HD-26 labeled as Serial 3 and Serial 4 (user configurable via installation of SIMs), Two 60-pin connectors on MVME761 planar for installation of two SIMs	One, DB-25 labeled as Serial 4
<b>Parallel Port:</b>	HD-36, Centronics compatible	D-36, Centronics compatible
<b>Ethernet:</b>	10BaseT or 100BaseTX RJ-45	10Mb/s Ethernet DB-15 AUI
<b>SCSI:</b>	8- or 16-bit, 50- or 68-pin connector via P2 adapter	8-bit, standard SCSI D-50

## Board Size

<b>Height:</b>	233.4 mm (9.2 in.)
<b>Depth:</b>	80.0 mm (3.1 in.)
<b>Front Panel Height:</b>	261.8 mm (10.3 in.)
<b>Width:</b>	19.8 mm (0.8 in.)

## All Modules

## Power Requirements

(not including power required by PMC or external AUI transceiver)

	+5V ± 5%	+12V ± 10%	-12V ± 10%
<b>MVME2603-1141:</b>	6.75 A typ. 8.5 A max.	250 mA typ. 500 mA max.	100 mA typ. 250 mA max.
<b>MVME2604-1341:</b>	8.0 A typ. 10.0 A max.	250 mA typ. 500 mA max.	100 mA typ. 250 mA max.
<b>MVME2603-2141:</b>	6.25 A typ. 8.0 A max.	250 mA typ. 500 mA max.	100 mA typ. 250 mA max.
<b>MVME2604-4341:</b>	7.5 A typ. 9.5 A max.	250 mA typ. 500 mA max.	100 mA typ. 250 mA max.

-12V power is not used on the MVME2600 but is supplied for use by other devices (such as PMC); requirements vary by device

## Demonstrated MTBF

(based on a sample of eight boards in accelerated stress environment)

<b>Mean:</b>	190,509 hours
<b>95% Confidence:</b>	107,681 hours

## Environmental

	Operating	Nonoperating
<b>Temperature:</b>	0° C to +55° C, forced air cooling	-40° C to +85° C
<b>Altitude:</b>	5,000 m	15,000 m
<b>Humidity (NC):</b>	10% to 80%	10% to 90%
<b>Vibration:</b>	2 Gs RMS, 20-2000 Hz random	6 Gs RMS, 20-2000 Hz random

## Electromagnetic Compatibility (EMC)

Intended for use in systems meeting the following regulations:

**U.S.:** FCC Part 15, Subpart B, Class A (non-residential)

**Canada:** ICES-003, Class A (non-residential)

This product was tested in a representative system to the following standards:

CE Mark per European EMC Directive 89/336/EEC with Amendments; Emissions: EN55022 Class B; Immunity: EN50082-1

## Safety

All printed wiring boards (PWBs) are manufactured with a flammability rating of 94V-0 by UL recognized manufacturers.

## Ordering Information

Part Number	Description
<b>MVME2600 with MVME761 I/O</b>	
All modules include 9MB Flash.	
<b>MVME2603-1121C to MVME2603-1161C</b>	200 MHz MPC603, 16MB–256MB ECC DRAM, IEEE 1101 compatible front panel with injector/ejector handles
<b>MVME2603-3121 to MVME2603-3161</b>	200 MHz MPC603, 16MB–256MB ECC DRAM, original VME Scanbe front panel and handles
<b>MVME2604-1321 to MVME2604-1361</b>	333 MHz MPC604, 16MB–256MB ECC DRAM, IEEE 1101 compatible front panel with injector/ejector handles
<b>MVME2604-1401 to MVME2604-1471</b>	400 MHz MPC604, 0–512MB ECC DRAM, IEEE 1101 compatible front panel with injector/ejector handles
<b>MVME2604-3321 to MVME2604-3361</b>	400 MHz MPC604, 16MB–256MB ECC DRAM, original VME Scanbe front panel and handles
<b>MVME2604-3401 to MVME2604-3471</b>	400 MHz MPC604, 0–512MB ECC DRAM, original VME Scanbe front panel and handles
<b>MVME2600 with MVME712 I/O</b>	
<b>MVME2603-4121 to MVME2603-4151</b>	200 MHz MPC603, 16MB–128MB ECC DRAM, 9MB Flash, original VME Scanbe front panel and handles
<b>MVME2603-5121 to MVME2603-5131</b>	200 MHz MPC603, 16MB–32MB ECC DRAM, 9MB Flash, IEEE 1101 compatible front panel with injector/ejector handles
<b>MVME2604-4321 to MVME2604-4361</b>	333 MHz MPC604, 16MB–256MB ECC DRAM, 9MB Flash, original VME Scanbe front panel and handles
<b>MVME2604-4401 to MVME2604-4471</b>	400 MHz MPC604, 0–512MB ECC DRAM, 9MB Flash, original VME Scanbe front panel and handles

<b>MVME761 Transition Module</b>	
<b>MVME761-001</b>	Transition module: Two DB-9 async serial port connectors, two HD-26 sync/async serial port connectors, one HD-36 parallel port connector, one RJ-45 10/100 Ethernet connector; includes 3-row DIN P2 adapter module and cable
<b>MVME761-011</b>	Transition module: Two DB-9 async serial port connectors, two HD-26 sync/async serial port connectors, one HD-36 parallel port connector, one RJ-45 10/100 Ethernet connector; includes 5-row DIN P2 adapter module and cable; requires backplane with 5-row DIN connectors
<b>MVME761P2-011</b>	5-row DIN P2 adapter compatible with MVME761; connectors for 16-bit (wide) SCSI and PMC I/O; requires backplane with 5-row DIN connectors
<b>MVME761EXT</b>	MVME761 I/O extension module, connectors for Ethernet, SCSI and PMC I/O
<b>SIM232DCE or DTE</b>	EIA-232 DCE or DTE Serial Interface Module
<b>SIM530DCE or DTE</b>	EIA-530 DCE or DTE Serial Interface Module
<b>SIMV35DCE or DTE</b>	V.35 DCE or DTE Serial Interface Module
<b>SIMX21DCE or DTE</b>	X.21 DCE or DTE Serial Interface Module
<b>MVME712 Transition Module</b>	
<b>MVME712M</b>	Transition module: One DB-25 sync/async serial port connector, three DB-25 async serial port connectors, one AIU connector for Ethernet, one D-36 parallel port connector, and one 50-pin 8-bit SCSI connector; includes 3-row DIN P2 adapter module and cable
<b>Related Products</b>	
<b>PMCS PAN-001</b>	Primary 32-bit PCI expansion, mates directly to the MVME2600 providing slots for either two single-wide or one double-wide PMC card, accepts optional PMCS PAN-010, IEEE 1101 compatible front panel with injector/ejector handles
<b>PMCS PAN1-001</b>	PMCS PAN-001 with original VME Scanbe front panel and handles
<b>PMCS PAN-010</b>	Secondary 32-bit PCI expansion, plugs directly into PMCS PAN-001 providing two additional PMC slots
<b>PMCS PAN1-010</b>	PMCS PAN-010 with original VME Scanbe front panel and handles
<b>MPMCxxx</b>	Motorola's family of PMC modules; ask your sales representative for details
<b>RAM200-043A</b>	32MB ECC DRAM mezzanine, 8MB Flash, non-stackable
<b>RAM200-044A</b>	64MB ECC DRAM mezzanine, 8MB Flash, non-stackable
<b>RAM200-045A</b>	128MB ECC DRAM mezzanine, 8MB Flash, non-stackable
<b>RAM200-046A</b>	256MB ECC DRAM mezzanine, 8MB Flash, non-stackable
<b>RAM200-047A</b>	512MB ECC DRAM mezzanine, 8MB Flash, non-stackable

**Documentation**

<b>V2600A/H</b>	MVME2600 Installation and Use
<b>V2600A/PG</b>	MVME2600/2700 Programmer's Reference Guide
<b>VME761A/H</b>	MVME761 Transition Module Installation and Use
<b>VME712A/H</b>	MVME712 Transition Module Installation and Use
<b>PPCBUGA1/UM and PPCBUGA2/UM</b>	PPC Bug Firmware Package User's Manual
<b>PPCDIAA/UM</b>	PPC Bug Diagnostics Manual

**Notes on Ordering Information**

1. Major revision levels are indicated by alpha character at end of part number.
2. Board support package source and object modules available upon request.
3. Documentation is available for on-line viewing and ordering at <http://www.motorola.com/computer/literature>.

**MOTOROLA**

[www.motorola.com/computer](http://www.motorola.com/computer)  
1-800-759-1107

Motorola Computer Group  
2900 S. Diablo Way  
Tempe, AZ 85282

**Regional Sales Offices****Canada & Central Pan America**

400 Matheson Blvd. West  
Mississauga, Ontario  
L5R 3M1 Canada  
905-507-7135 or 888-366-3624

**Eastern Pan America**

1650 Tysons Boulevard, Suite 250  
McLean, VA 22102  
703-714-0725

**Western Pan America**

1150 Kifer Road, Suite 202  
Sunnyvale, CA 94086  
408-991-8633

**Asia Pacific and Japan**

34/F Nat West Tower  
Times Square, 1 Matheson St  
Causeway Bay, Hong Kong  
852-2966-3209

**East Mediterranean**

6 HaTaas Street  
Ramat-Gan, Isreal 52523  
972-3-610-4388

**France**

Zone Technopolis - Immeuble  
THETA 3, avenue du Canada - BP304  
91958 LES ULLIS  
Courtaboeuf Cedex, France  
+33 (0) 1 64 86 64 00

**Germany**

Hagenauer Strasse 47  
D-65203 Wiesbaden, Germany  
+49 (0) 611-3611 604

**Benelux**

De Waal 26, 5684 PH Best  
PO Box 350, 5680 AJ Best  
Netherlands  
+31 4993 61250

**Nordic**

Dalvagen 2  
S-169 56 Solna, Sweden  
+46 (0) 8 734 8800

**United Kingdom**

London Road, Old Basing,  
Basingstoke, Hampshire  
RG24 7JL England  
+44 (0) 1256 790555

Motorola and the Motorola logo are registered trademarks and The Heart of Smart, DigitalDNA and the DigitalDNA logo are trademarks of Motorola, Inc. AIX is a registered trademark of International Business Machines Corporation. PowerPC and the PowerPC logo are registered trademarks; and PowerPC 603 and PowerPC 604 are trademarks of International Business Machines Corporation and are used by Motorola, Inc. under license from International Business Machines Corporation. Centronics is a registered trademark of Centronics Data Computer Corporation. All other names, products, and/or services mentioned may be trademarks or registered trademarks of their respective holders.

This data sheet identifies products, their specifications, and their characteristics, which may be suitable for certain applications. It does not constitute an offer to sell or a commitment of present or future availability, and should not be relied upon to state the terms and conditions, including warranties and disclaimers thereof, on which Motorola may sell products. A prospective buyer should exercise its own independent judgement to confirm the suitability of the products for particular applications. Motorola reserves the right to make changes, without notice, to any products or information herein which will, in its sole discretion, improve reliability, function, or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent or other intellectual property rights or under others. This disclaimer extends to any prospective buyer, and it includes Motorola's licensee, licensee's transferees, and licensee's customers and users. Availability of some of the products and services described herein may be restricted in some locations.

Copyright 1997 Motorola Inc. 2600X-D4 5/00