





The PowerPC 601™ Design Kit Update

Application Note AN-PPC-005

*Updating PowerPC 601 Board Designs
to the latest hardware level.*

Jacqueline Shorter-Beauchamp
April 1995

Document Number:
MPRKITV3-01

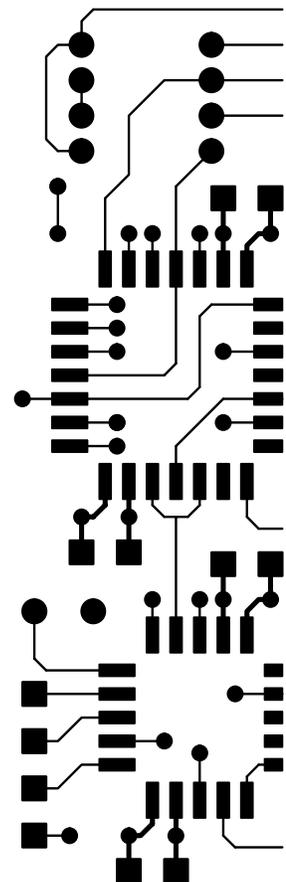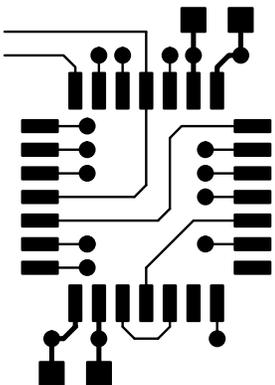

The PowerPC 601 Design Kit Update

Jacqueline Shorter-Beauchamp

Updating PowerPC 601 board designs to the latest hardware level.

This application note is directed towards designers and system developers who have or may implement a PowerPC 601 design using the *PowerPC 601 System Design Kit* documentation (MPRKITV1-02 and MPRKITV2-02) and/or design files as a reference. This application note provides the most current information about the PowerPC 601 motherboard design.

The changes in this package provide instructions on updating a PowerPC 601 board design to the latest hardware level and are listed below as follows:

1. Update the PowerPC-to-PCI Bridge components: IBM27 82653 to Rev. 4.0 (8190655) and IBM27-82654 to Rev. 2.1 (93G9874). Included with this package is Application Note AN-PPC-001, *Updating PowerPC System Designs from IBM27-82650 Revision 2.0 to Revision 2.1*, which provides instructions on the changes that are necessary to update the board design and schematics. See the *IBM27-82650 PowerPC to PCI Bridge Chipset Errata Summary* (MPR650UMU-03) for detailed information regarding chipset errata.
2. Change the System I/O Bridge (Intel 82378) from Version IB to Version ZB. Replacing the Version IB part with Version ZB results in changes to the interrupt system and the removal of certain errata. All PCI interrupts now share IRQ15, which is no longer used as an ISA interrupt. IRQ9 and IRQ11 are now available as ISA interrupts, . PCI interrupts now go directly to the 82378. Application Note AN-PPC-002, *Upgrading PowerPC 601 Evaluation Boards to Support the Intel SIO 82378ZB*, is included with this package to provide the user with detailed implementation instructions.
3. Implement a board ID register set to FEh. Bias the XBus with either 10K Ohm pull-up resistors to +5V or 250 Ohm pull-down resistors to GND. Please reference Section 11.0, System I/O Address Maps, in the revised *PowerPC 601 Evaluation Board Technical Specification and User's Guide* for a detail description regarding board ID register implementation.
4. Add 10K Ohm pull-up resistors to +5V on the following IRQ lines: IRQ3, IRQ4, IRQ9, IRQ10, IRQ11, and IRQ12.
5. Add a 33uF decoupling capacitor to the SCSI terminator 'Term Power' signal, U32 pin – 14.

A revised *PowerPC 601 Evaluation Board Technical Specification and User's Guide* is available reflecting the above described changes and is included with this package. The document is a TERS3820 file, and the filename is 601KITUP. The document is approximately 231 pages in length. Please see the Announce file included with this package for instructions on how to unarchive the file.

PowerPC

© International Business Machines Corporation, 1995. Printed in the United States of America 4/95. All Rights reserved.

IBM Microelectronics, PowerPC, PowerPC 601, PowerPC 603, PowerPC 604, Risc-Watch, and AIX are trademarks of the IBM corporation. IBM and the IBM logo are registered trademarks of the IBM corporation. Other company names and product identifiers are trademarks of the respective companies.

This document contains information which is subject to change by IBM without notice. IBM assumes no responsibility or liability for any use of the information contained herein. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of IBM or third parties. The products described in this document are not intended for use in implantation or other direct life-support applications where malfunction may result in physical harm or injury to persons. NO WARRANTIES OF ANY KIND, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE OFFERED IN THIS DOCUMENT.

USA and Canada:

IBM Microelectronics Division
1580 Route 52, Bldg. 504
Hopewell Junction, NY 12533-6531
Tel: (800) PowerPC
Fax: (800) PowerFax

Japan:

IBM
800, Ichimiyake
Yasu-cho, Yasu-gun
Shiga-ken, Japan 520-23
Tel: (81) 775-87-4745
Fax: (81) 775-87-4735

Europe:

IBM
La Pompignane BP 1021
34006 Montpellier, France
Tel: (33) 6713-5757 (Français)
(33) 6713-5756 (Italiano)
Fax: (33) 6713-5750
(from Paris add 16)

Europe:

IBM
Informations Systeme GmbH
Laatzener Str. 1
30539 Hannover, Germany
Tel: (49) 511-516-3444 (English)
(49) 511-516-3555 (Deutsche)
Fax: (49) 511-516-3888

