

# HEWLETT-PACKARD

## SITE ENVIRONMENTAL REQUIREMENTS

*FOR DISC  
AND  
DISC/TAPE  
DRIVES*





# **SITE ENVIRONMENTAL REQUIREMENTS**

**FOR  
DISC/TAPE DRIVES**

Printed: JUNE 1986

## **NOTICE**

The information contained in this document is subject to change without notice.

**HEWLETT-PACKARD MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.** Hewlett-Packard shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

This document contains proprietary information which is protected by copyright. All rights are reserved. No part of this document may be photocopied or reproduced without the prior written consent of Hewlett-Packard Company.

HEWLETT-PACKARD COMPANY  
P.O. BOX 39 BOISE, IDAHO 83707, U.S.A.

Corefile•Secore

# PRINTING HISTORY

New editions incorporate all update material since the previous edition. Updating Supplements, which are issued between editions, contain additional and revised information to be incorporated into the manual by the user. The date on the title page changes only when a new edition is published.

First Edition	AUG 1981
Second Edition	JAN 1982
Third Edition	MAY 1982
Fourth Edition	SEP 1982
Fifth Edition	APR 1983
Sixth Edition	AUG 1983
Seventh Edition	JAN 1984
Update 1	1 APR 1984
Eighth Edition	MAY 1984
Ninth Edition	NOV 1984
Update 1	1 FEB 1985
Tenth Edition	MAR 1985
Update 1	14 JUN 1985
Eleventh Edition	JUNE 1986

# CONTENTS

Section I	Page
<b>INTRODUCTION</b>	
General Information . . . . .	1-1
Customer Responsibility . . . . .	1-2
Customer Engineering Services . . . . .	1-2
<b>Section II</b>	<b>Page</b>
<b>ENVIRONMENTAL REQUIREMENTS</b>	
Introduction . . . . .	2-1
Effects of Climate . . . . .	2-1
Vibration and Shock . . . . .	2-1
Altitude . . . . .	2-2
Electromagnetic Susceptibility . . . . .	2-5
Introduction . . . . .	2-5
Radiated Interference Susceptibility . . . . .	2-5
Conducted Interference Susceptibility . . . . .	2-6
Electrostatic Discharge . . . . .	2-6
Magnetic Susceptibility . . . . .	2-6
Power Line Irregularities . . . . .	2-6
Contaminants . . . . .	2-8
Particulate Contaminants . . . . .	2-8
Corrosive Contaminants . . . . .	2-10
Cooling Requirements . . . . .	2-11
Tilting . . . . .	2-11
<b>Section III</b>	<b>Page</b>
<b>SITE PLANNING</b>	
Introduction . . . . .	3-1
Environmental Specifications . . . . .	3-1
Environments . . . . .	3-1
Acoustics . . . . .	3-2

# ILLUSTRATIONS AND TABLES

Figure	Page
Random Vibration Profile 1: Operating .....	2-3
Random Vibration Profile 2: Nonoperating .....	2-3
Random Vibration Profile 3: Operating .....	2-4
Random Vibration Profile 4: Nonoperating .....	2-4
Shock Profile: Operating and Nonoperating .....	2-5
Surge Voltage Waveforms .....	2-7
Sizes of Common Air Contaminants .....	2-9
Contamination Sizes Relative to Disc/Head Spacing .....	2-9
HP 7911R/HP 7912R/HP 7914R Dimensions .....	A-15
HP 793X Standard and Optional Power Cords .....	A-37

Table	Page
HP 7907 Disc Drive Specifications .....	A-3
HP 7911, 7912, and 7914 Disc/Tape Drives Specifications .....	A-9
HP 7914ST Subsystem Specifications .....	A-17
HP 7914TD Disc/Tape Subsystem Specifications .....	A-21
HP 7914CT Disc/Tape Drive Specifications .....	A-25
HP 7933H, HP 7935H, HP 7933XP AND HP 7935XP Disc Drives Specifications .....	A-31
HP 97935A Media Module Specifications .....	A-39
HP 7941A and 7945A Disc Drives Specifications .....	A-41
HP 7942A and 7946A Disc/Tapes Drive Specifications .....	A-47
Average Current Usage By Product Type .....	B-3
Reference Information .....	C-3

Each product listed in Appendix A meets either FCC classification A or B. Refer to the Electromagnetic Emissions heading in the appropriate table to determine the classification of the product.

**FOR U.S.A. ONLY**

The Federal Communications Commission (in 47 CFR 15.838) has specified that the following notice be brought to the attention of the users of this product.

**FEDERAL COMMUNICATIONS COMMISSION  
RADIO FREQUENCY INTERFERENCE  
STATEMENT**

Warning: This equipment generates and uses radio frequency energy and if not installed and used properly, that is, in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception. It has been type tested and found to comply with the limits for a Class B computing disc/tape drive in accordance with the specifications in Subpart J of FCC Rules, which are designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: reorient the receiving antenna; relocate the equipment with respect to the receiver; move the equipment away from the receiver; plug the equipment into a different branch circuit. If necessary, the user should consult the dealer or authorized field service representative for additional suggestions. The user may find the following booklet prepared by the Federal Communications Commission helpful: "How to Identify and Resolve Radio-TV Interference Problems". This booklet is available from the U.S. Government Printing Office, Washington, DC 20402. Stock No. 004-000-00345-4.

**FEDERAL COMMUNICATIONS COMMISSION  
RADIO FREQUENCY INTERFERENCE  
STATEMENT**

Warning: This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instructions manual, may cause interference to radio communications. It has been tested and found to comply with the limits for Class A computing devices pursuant to Subpart J of Part 15 of FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause interference in which case the user at his own expense will be required to take whatever measures may be required to correct the interference.



# INTRODUCTION

SECTION

I

## GENERAL INFORMATION

This manual provides information regarding the environmental requirements of Hewlett-Packard disc/tape drives. These include operating and nonoperating (storage, transport or power down) requirements as well as recommended limits. Section II provides a generic description of each environmental item and Section III provides general information on site planning. Appendices A and B contain the specific environmental requirements, operational specifications and operational characteristics for each specific HP disc/tape drive.

Note: This manual applies only to HP disc/tape drives listed in Appendices A and B.

The environmental requirements cover both the actual physical location of the disc/tape drive and the associated area. While Hewlett-Packard provides consultation on the site environmental requirements, the scheduling, planning, preparation and verification of a site environment suitable for installation of a Hewlett-Packard disc/tape drive is the customer's responsibility. Hewlett-Packard Sales and Support Personnel are available during the pre-installation period to assist the customer.

The information in this manual covers only Hewlett-Packard disc/tape drives and accessories. The customer is responsible for meeting the site environmental requirements for the rest of the system components. If the disc/tape drive is to be installed on Hewlett-Packard computer equipment, appropriate site preparation documentation, including environmental requirements, will be provided for each system component.

Environmental requirements are those items required to ensure that HP disc/tape drives meet the published operational characteristics. Each environmental item has a specific measurable parameter or information that affects the operational characteristics of a HP disc/tape drive. Continual operation of the disc/tape drive outside the limits of the recommended environmental limits may result in degradation of disc/tape drive operation. The following items are considered environmental requirements:

- Temperature
- Humidity
- Shock
- Vibration
- Altitude
- Electromagnetic Susceptibility
- Power
- Contaminants
- Cooling Requirements
- Tilting

Contaminants (page 2-6) as yet have no measurable parameters except as rated for the disc/tape drive particulate filter. Chemical contaminants that can corrode disc/tape drive components are presently being researched by Hewlett-Packard. Operating a Hewlett-Packard disc/tape drive in an environment known to contain significant amounts of the listed contaminants will lead to disc/tape drive malfunctions requiring extensive servicing. Hewlett-Packard therefore recommends to our customers that HP disc/tape drives not be stored or operated in areas that contain the contaminants listed in Section 2 under corrosive contaminants.

## Introduction

### **CUSTOMER RESPONSIBILITY**

The customer is responsible for furnishing all labor and materials for site preparation, site maintenance, conformance to local codes, and the compatibility of Hewlett-Packard products with local laws, codes and licenses. The customer is solely responsible for establishing and maintaining the site requirements specified at the site planning meeting. Failures resulting from such unspecified environmental or physical phenomena are not covered by warranty or maintenance agreement (examples include, but are not limited to, unusual shock or electrical damage, accident, fire or water damage, neglect, air conditioning failure, humidity control failure, damages during transportation by customer or causes other than ordinary use, or toxic or corrosive chemicals present in the air).

### **CUSTOMER ENGINEERING SERVICES**

HP offers complete on-site customer engineering maintenance service on a world-wide basis. Charges for this service, quoted as a basic monthly maintenance charge (BMMC), are among the lowest in the industry, contributing to the low overall cost of ownership associated with the purchase of an HP disc/tape drive.

Provisions of the BMMC require compliance with the specifications and/or recommendations listed in this site environmental requirements manual unless escalation procedures are implemented. Conditions that are identified as having a detrimental effect on disc/tape drive performance (e.g., corrosive gases, noisy or unstable power source, etc.) must be corrected prior to installation.

For further details, contact your nearest Hewlett-Packard Sales and Support Office.

# ENVIRONMENTAL REQUIREMENTS

SECTION

II

## INTRODUCTION

The quality and reliability features of a product must be developed early in the product design stage and carried through the manufacturing process. Hewlett-Packard seeks to design and build the finest quality and reliability into our products starting at the bread-board design stage.

Type testing is where a group of units are tested and the results of that testing is used to represent that particular product.

Due to the length of testing time, and in some cases the increased stress levels applied to the product, it is not practical to test each and every product manufactured to every environmental specification. However, certain tests are performed on each product as it completes the manufacturing cycle. This testing ensures that the product sold is as good as the product that was environmentally tested.

## EFFECTS OF CLIMATE

All HP Disc/Tape Drives can operate in an environment suitable for human occupancy as long as moisture will not condense within the environment and room air does not contain chemical contaminants which may degrade disc/tape drive components. Along with the environment in which the disc/tape drive operates, the effects of outside temperature, humidity, altitude and other regional characteristics must be taken into consideration. For instance:

- At higher altitudes, the efficiency of a cooling fan decreases because of reduced air density. Consider keeping the disc/tape drive enclosure at a lower temperature to compensate for the reduced air density at the disc/tape drive air intake vents.
- In locations where extremes of temperature and humidity prevail, consider the effects of such conditions on the disc/tape drive when the main power is shut down. For instance, in northern regions, the effects of winter nighttime temperatures should be considered when the main power is shut off.
- In warm, humid regions, a fungus growth prevention program should be considered.
- In shoreline installations, the disc/tape drive site may require special air conditioners, dehumidifiers, and other items to reduce high humidity and corrosive salt in the air.

Reliability and performance are at maximum when operated within the recommended temperature and humidity range. See recommended temperature and relative humidity limits in Appendix A.

## VIBRATION AND SHOCK

Vibration can cause slow degradation of mechanical parts and, when severe, can cause data errors in disc/tape drives; hence it should be avoided or controlled. Also, mechanical connections such as PCA connectors and cable connectors may be affected. The best preventive measure is to build the site away from vibration-generating sources, such as heavy industrial machinery (stamp mills, etc.). Care in handling the disc/tape drives will also avoid problems resulting from sudden shock. See vibration and shock requirements in Appendix A.

## Environmental Requirements

Random vibration is superior as a test technique in that all product resonances can be excited simultaneously. This is especially necessary with products whose performance characteristics are statistical in nature and can only be measured over a period of time, such as disc and tape drives. It is impractical to do a long duration single frequency test at every frequency. In addition, a sweep through the frequency range does not give adequate statistics for problem frequencies. Only random vibration offers both thoroughness and timeliness.

Some environments contain vibration at discrete frequencies whereas other environments contain broadband vibrations. Random vibration test and measurement techniques work for both environments. A frequency spectrum reveals the nature and magnitude of the vibration environment and can be compared directly to the spectra in this specification.

Random vibration testing has been used extensively in military and aerospace applications but does not have widespread use in commercial markets due to the high cost of test equipment. In our continuing effort to build quality products, the cost alone cannot justify a compromised test program. Because it is relatively new in this market, some explanation of terms and concepts is appropriate.

Random vibration is vibration whose magnitude is not specified for any given instant of time. The instantaneous magnitude of a random vibration is specified only by probability distribution functions giving probable fraction of the total time that the magnitude lies within a specified frequency range. Random vibration contains no periodic nor quasi-periodic constituents.

The magnitude of this distribution is measured in power spectral density, or PSD, which is the limiting mean square acceleration per unit bandwidth. It is measured in  $g^2/Hz$  and reveals how much energy is applied at a particular frequency.

A site can be qualified by comparing a frequency spectrum of the intended environment to the product specification spectra. The environment should be under the specification at every frequency. Exceptions will be evaluated on a case-by-case basis.

Figures 2-1 through 2-4 are the unpackaged operating and nonoperating vibration profiles used to test most HP disc/tape drives. The vibration test verifies the disc/tape drive's operational and mechanical integrity. Appendix A refers to the appropriate figure where applicable.

Figure 2-5 is the unpackaged operating and nonoperating shock profile used to test most HP disc/tape drives. The shock test also verifies the disc/tape drive operational and mechanical integrity. Appendix A indicates the maximum acceleration levels at which no data loss will occur and no operator intervention will be required.

## ALTITUDE

Altitude must be considered for operating conditions. In the operating environment, the lower air density at extremely high altitudes may be insufficient to provide adequate cooling to the disc drive which may decrease performance and/or reliability. See altitude requirements in Appendix A.

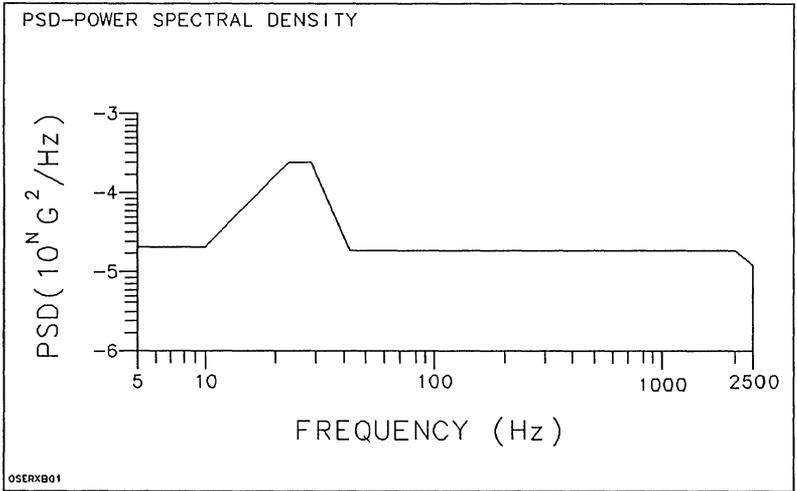


Figure 2-1. Random Vibration Profile 1: Operating

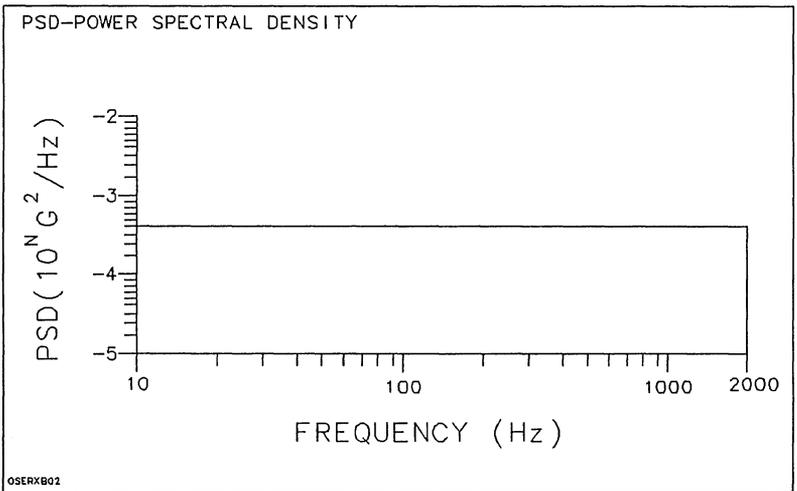


Figure 2-2. Random Vibration Profile 2: Nonoperating

Environmental Requirements

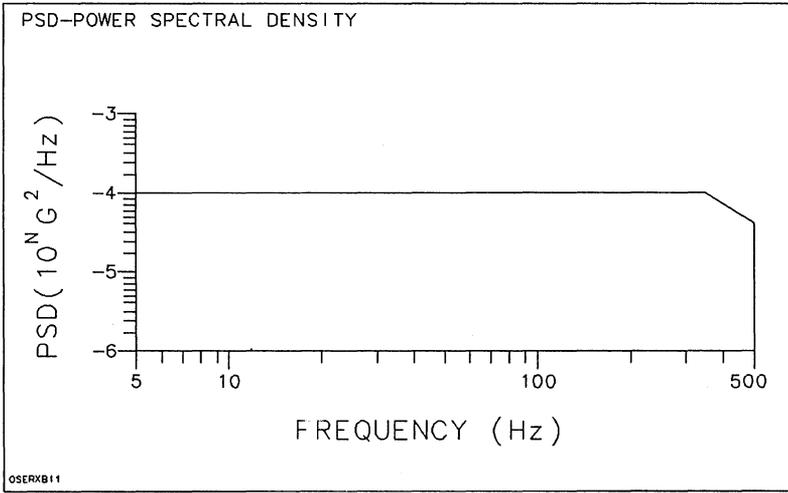


Figure 2-3. Random Vibration Profile 3: Operating

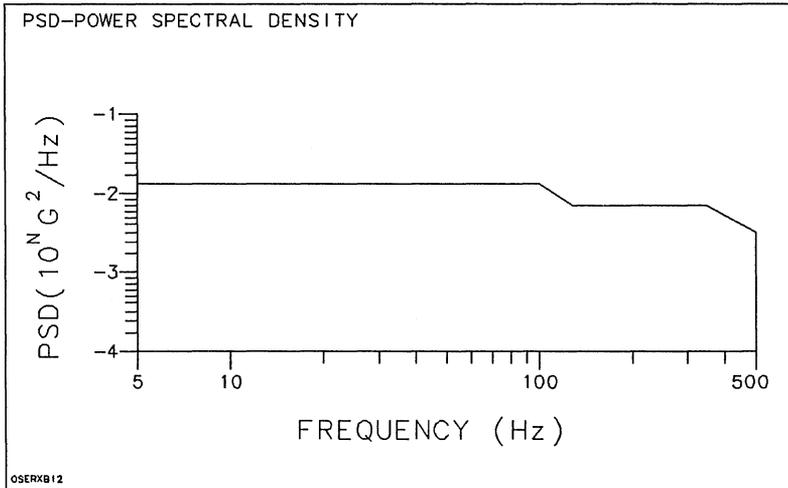


Figure 2-4. Random Vibration Profile 4: Nonoperating

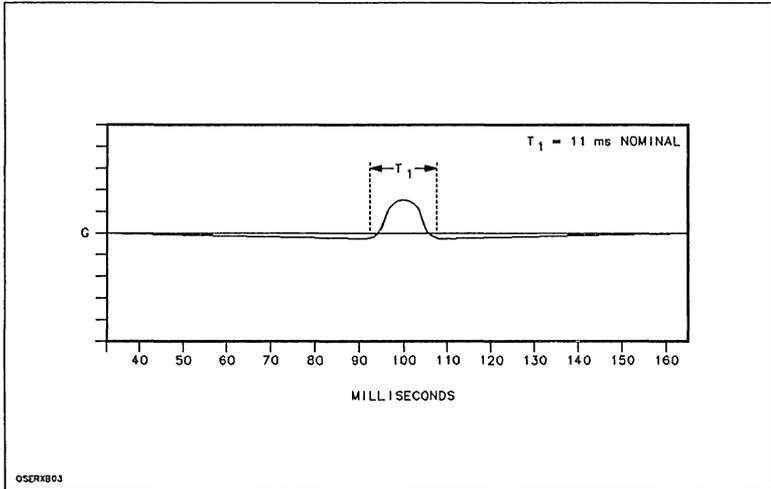


Figure 2-5. Shock Profile: Operating and Nonoperating

## ELECTROMAGNETIC SUSCEPTIBILITY

### INTRODUCTION

Every reasonable attempt is made to make Hewlett-Packard products resistant to electromagnetic interference (EMI). However, in order to minimize the possibility of experiencing difficulty it may be necessary to take unique steps. This may include but not be limited to the following:

- Improved grounding techniques.
- Placing the disc/tape drive in a grounded screen enclosure.
- Placing grounded copper screens on all windows.

### RADIATED INTERFERENCE SUSCEPTIBILITY

Electronic equipment, including disc/tape drives, may exhibit unacceptable behavior if operation is attempted in environments where electromagnetic fields exist, such as near radio and TV transmitting towers, or near radar installations as found at airports. If radiated electromagnetic fields are suspected, or verified (such as by direct measurement using spectrum analyzers or field strength meters), precautions should be taken to shield the disc/tape drive products from the electromagnetic field.

## Environmental Requirements

### CONDUCTED INTERFERENCE SUSCEPTIBILITY

Radio frequency noise may be introduced into a disc/tape drive through the ac power line as well as through the air as an electric field. Power line conditioners and line filters are very effective in eliminating conducted radio frequency interference (RFI).

### ELECTROSTATIC DISCHARGE

Electrostatic discharge, commonly known as static electricity, may cause alteration of data, improper operation or electronic failure. Carpeting, low humidity, and leather-soled shoes may all contribute to unacceptable electrostatic fields. If static discharges are detected (as when touching door knobs, or metallic objects), humidifiers, antistatic mats and other antistatic procedures should be implemented.


### MAGNETIC SUSCEPTIBILITY

Disc/tape drives, and magnetic media (tapes, floppy discs and removable disc packs), may all exhibit destruction of stored data if exposed to magnetic fields. Keep all magnetic materials away from magnetic media and recording devices.

### POWER LINE IRREGULARITIES



In some geographic areas, available power that is used for the disc/tape drive may experience excessive voltage sags, surges, transients, outages, or other irregularities that are unacceptable for reliable disc/tape drive operation. Therefore, a power quality survey must be conducted. The results of the survey should be analyzed for correct voltage, current, phase, the absence of detrimental power line transients, and conducted interference that can cause a malfunction to occur as a disc/tape drive out-of-specification operation. If any item does not meet HP disc/tape drive requirements, corrective action must be taken to correct the situation. Power line irregularities may be divided into the following categories:

- a. Line Dropout. The power distribution network may lose power for short periods of time. HP disc/tape drives recover gracefully from short duration line dropouts. To insure that long duration power line dropout will not affect the constant operation of any electrical device, an uninterruptible power supply (UPS) would be required. Line conditioners and regulators will not help in this situation.
- b. Over or Under Voltage. Fluctuations from the nominal line voltage are experienced as the result of equipment being turned on or off both within the immediate vicinity and also over the entire power distribution network. A power failure many miles away may cause voltage fluctuations. In a worst case situation, (e. g. brown out), a UPS is one example of a device that can provide uninterrupted power.
- c. Line Transients. Just as radio frequency noise may be transmitted over the ac power line, electrical noise may also be evidenced at the ac power outlet. Line transients may result in interrupted operation, blown fuses, or electrical failure. The surge waveforms used to test HP disc/tape drive power line transient response are shown in figure 2-6. The waveforms are described in the IEEE "Guide on Surge Voltages in AC Circuits up to 600V, Final Draft."
- d. Neutral to Ground Noise. This is the noise exhibited between the neutral and ground lines.
- e. Ground to Ground Noise. This is the noise exhibited between the disc/tape drive ground and ground earth.

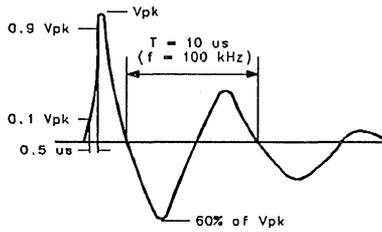

Oscillatory wave 0.5 us rise time. 100 kHz decaying at 40% for each successive peak.

A. RING WAVE (0.5 us-100 kHz) OPEN CIRCUIT VOLTAGE

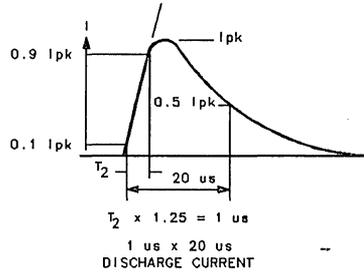

B. UNIDIRECTIONAL WAVES

OSERMA04

u = 10<sup>-6</sup>

Figure 2-6. Surge Voltage Waveforms

## Environmental Requirements

f. Power Line Distortion. This is an undesired change in the original signal waveform that results in an unfaithful representation of the desired waveform. Waveform clipping is one example of this type of distortion. Noise in the form of extraneous signals superimposed on the desired waveform is not defined as distortion.

Power line conditioners may be helpful in regulating and conditioning (removing transients) ac power. Problems associated with power line irregularities are often very difficult to diagnose due to the unpredictable and intermittent nature of the problem.

## CONTAMINANTS

Contaminants consist primarily of particulates or corrosives. Both may be airborne in atmospheric dust as a complex mixture of smokes, mists, fumes, dry granular particles, and fibers. The components of any mixture may consist of soot and smoke, silica, clay, organic materials, and metallic fragments. A sample may also include living organisms such as mold spores and bacteria. These components vary with locality, season of the year, direction and strength of the wind, and proximity of dust sources. Size of the particles also varies with differing conditions. Figure 2-7 shows size ranges of typically encountered airborne particles and figure 2-8 shows the relationship between some particles and the gap between the flying heads and oxide coating in a disc/tape drive. Avoid operation in particularly dusty areas, e.g., factory floors, sawmills, etc.

### PARTICULATE CONTAMINANTS

Particulate contaminants consist primarily of dust particles which are of various physical compositions. These particles present a clear abrasive hazard to a disc/tape drive if introduced into the operating environment. In some instances, the particles are conductive and can short-circuit wiring in the disc/tape drives when an excessive amount accumulates. Also, film-forming particles and residues cause connector problems.

In environments that contain hydrocarbons, particulate accumulation on the printed circuit assemblies (PCA's) causes an increase in the internal disc/tape drive temperature. Continual accumulations of particulates eventually prevent the disc/tape drive from maintaining the correct amount of cooling on the PCA's. This causes the disc/tape drive to operate beyond the specified temperature range and a malfunction may occur as an out-of-specification operation.

The particulate upper limit is expressed as the arithmetic mean value in micrograms per cubic metre ( $\mu\text{g}/\text{m}^3$ ) or micrograms per square centimetre per 30 days ( $\mu\text{g}/\text{cm}^2/30$  days). If particulate limits are not available for a product, the limits will not be listed in the table for that product. Operating an HP disc/tape drive at the upper limit may require an increase in the number of times the absolute filter must be changed resulting in an increased basic monthly maintenance charge (BMMC).

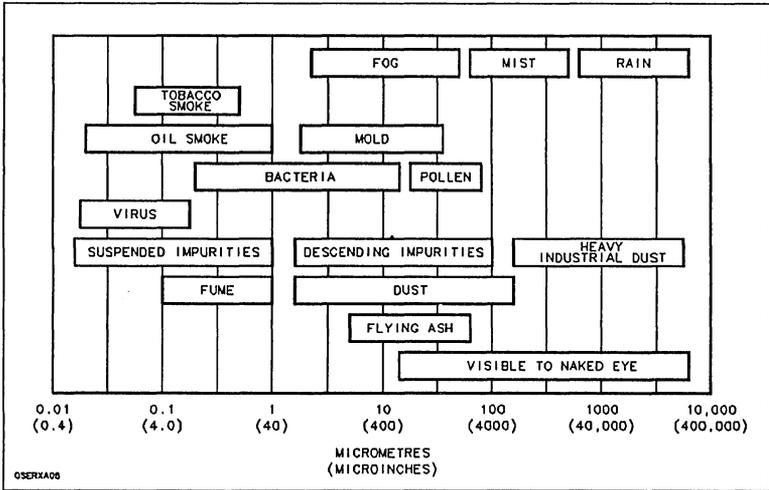


Figure 2-7. Size of Common Air Contaminants

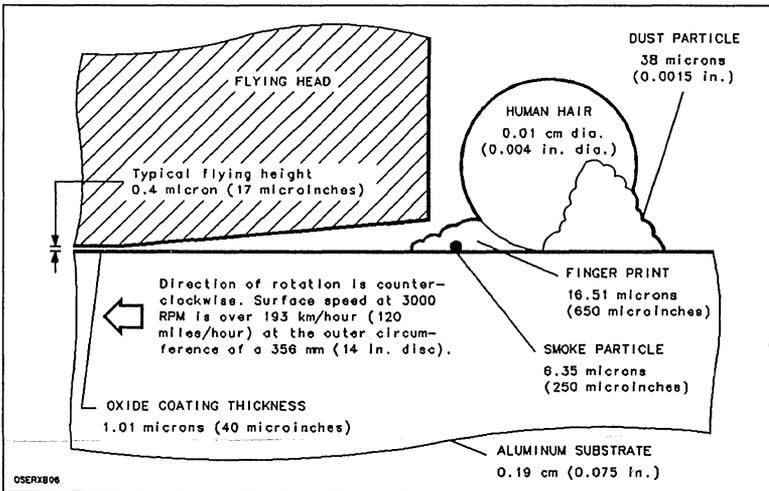


Figure 2-8. Contaminant Sizes Relative to Disc/Head Spacing

## Environmental Requirements

### CORROSIVE CONTAMINANTS

Corrosion is a complex form of material deterioration and is generally defined as the destruction of material by chemical or electrochemical reaction with its environment. Some effects of corrosion in disc/tape drives are the destruction of magnetic surfaces on discs and tapes, deterioration of plastics used in the equipment, and general degradation of conformal coatings on printed circuit assemblies (PCA's). Many common problems can be avoided by isolating the disc/tape drive from contaminant producing machinery. Examples of this type are office copiers, milling machines, and equipment that produce corrosive vapors or particulates. However, in areas where the atmosphere contains large amount of various corrosive contaminants, more drastic measures must be taken to ensure clean air in the environment where the disc/tape drive is used. Most environments are corrosive to some degree. Examples are air and moisture; fresh, distilled, or salt water; urban and industrial atmospheres; steam and other gases such as chlorine, ammonia, hydrogen sulfide, sulfur dioxide, and fuel gases; mineral acids such as hydrochloric, sulfuric, and nitric. In general, inorganic materials are more corrosive than organic. For example, corrosion in the petroleum industry is due more to sodium chloride, sulfur, hydrochloric and sulfuric acids, and water than to oil, naphtha, or gasoline.

Corrosive environments such as that found in steel, acid, and paper manufacturing industries usually preclude the use of filtered ambient air for forced convection cooling. Corrosives generally cannot be filtered out by normal filtration methods, and the techniques that must be used are complex and costly. In these cases, the disc/tape drives must be enclosed in a highly controlled environment.

Although the term "environment" as used here refers only to atmospheric contaminants, there is a strong link between corrosion rates and temperature and humidity conditions. Many corrosion processes (film thickness buildup, etc.) accelerate rapidly at high humidities and temperatures. This means that corrosive environments that possess high temperatures and humidities should be of particular concern. The following are typical corrosive contaminants.

- **Sulfur Dioxide.** Sulfur dioxide is generally considered the most corrosive of the common contaminant gases. In combination with water, it forms sulfurous acid mist, an active and rapidly corrosive compound. It is known to produce molecular separation in polymers, and to cause spots on microfilm materials. This acid is found in industrial environments and causes deterioration of disc surfaces.
- **Total Oxidants.** The presence of strong oxidizing gases in the atmosphere, particularly ozone, is known to be potentially harmful to any organic material. The damaging effects most often encountered are the cross linking of elastomers, the cracking of stressed rubber, and the oxidation of silver.
- **Hydrogen Sulfide.** Hydrogen sulfide is a rapid corrosive agent, particularly to copper and silver. Hydrogen sulfide is a common atmospheric contaminant found near oil fields, sulfur springs, and marshy areas, and occasionally is emitted from industrial or sewage treatment activities.
- **Ammonia.** In sufficient concentrations, ammonia has been found to cause cracking of stressed brass, decrease insulation resistance, and increase loss factor in certain insulators.
- **Halogens.** Halogens are chemical elements that are fairly corrosive. The halogens are: fluorine, bromine, chlorine, and iodine. Halogens react strongly with metals and hydrogen to form halides. The metal halides are solid water-soluble salts such as table salt (sodium chloride). Halogens usually occur in salt deposits and sea water environments. Halogens (and their compounds) are widely used in medicine, photographic films, sanitation processes, disinfectants, insecticides, some textile processes, paints, bleaches and plastics.

## **COOLING REQUIREMENTS**

A fan, internal to the disc/tape drive, provides adequate ventilation when the disc/tape drive is operated in the appropriate environment. To obtain maximum efficiency, allow the required clearances between the front and rear of the disc/tape drive. Air conditioning may be required to maintain the correct temperature. Install required air conditioning before installation of a HP disc/tape drive. See temperature and cooling requirements in Appendix A.

## **TILTING**

Tilting the disc/tape drive more than the specified angle may result in longer seek times or no seek at all. These seek times may be greater than the specified seek time. See tilting requirements in Appendix A.



## 3-1. INTRODUCTION

The purpose of site planning is to provide an optimum environment for computer products. By providing this optimum environment the customer will receive maximum satisfaction and success. As stated in the specification tables (refer to Appendix A), continually operating a product at an extreme of the environmental requirements can reduce the product reliability.

Since Hewlett-Packard is dedicated to customer satisfaction we have provided a set of recommended environmental specification for a majority of the products listed in Appendix A. By providing an environment that fits within the range of the recommended environmental specifications, the customer should receive maximum long term trouble free operation of their HP products.

## 3-2. ENVIRONMENTAL SPECIFICATIONS

Three different specifications are given for most environmental requirements.

- Recommended Specifications
- Operating Specifications
- Nonoperating Specifications

Recommended specifications are those specifications that Hewlett-Packard, through experience has determined will provide the maximum long-term success to our customers.

For those products in Appendix A that do not have a recommended specification for one of the environmental specifications it is recommended to the customers that they provide an environment that fits into the mid range of the operating specifications, where practical.

Operating specifications are those specifications that Hewlett-Packard, through *type testing*, has determined provides a safe (survival) operating range for the product. It also must be understood that continual operation at the extremes of this operating range results in stress on the the product and can result in early failure or less reliable operation. All possible combinations of stresses have not been type tested. The results of simultaneously applying worst case extremes of several environmental parameters are unpredictable.

Nonoperating specifications are designated limits for transit and storage of the product. Type testing has been completed to ensure that the HP product will operate when installed, if these nonoperating specifications have not been exceeded.

## 3-3. ENVIRONMENTS

There are basically two environments where Hewlett-Packard disc and disc/tape drives should be operated. The first is the controlled computer room environment. This environment is a physical area where all environmental elements (i. e. temperature, humidity, power, etc.) are controlled to fit the recommended specifications of the disc drives 100 percent of the time. Disc drives such as the HP 792X, HP 7933 and HP

## Site Planning

7935 should be operated in this type of environment. These disc drives are typically connected to large computer systems that require this environmental control for maximum reliability. Under certain circumstances certain members of the HP 791X family fit into this category.

The second environment can be defined as the general office environment where personnel work on a full time basis and where environmental elements are subject to greater variations (within the recommended ranges) than those in a controlled computer room. Although they have the same recommended specifications as the HP 793X, members of the HP 791X and HP 794X series are typically operated in the environment with the following recommendations. It is recommended that the customer make every effort to reduce all adverse affects on the disc drive. This should include, but not be limited to, clean power, reduced temperature and humidity swings and reducing the circumstances where electrostatic discharge can cause reliability problems.

While many Hewlett-Packard disc drives have been operated successfully in environmental circumstances not optimally suited for reliable operations, there have also been circumstances where reliability has been adversely effected.

It is Hewlett-Packard's goal that our customers be highly successful in the use of our products. We therefore highly recommend that the time, energy and effort be made to provide a benign environment for our products. It will be to the long term benefit of our customers.

## 3-4. ACOUSTICS

There are two methods of specifying acoustic emissions: sound pressure level and sound power level. Sound pressure level is most commonly quoted because it yields a number significantly lower than sound power level. The disadvantage in comparing sound pressure levels is that the values are dependent upon test methods and measurement distances. For example, if sound pressure is measured from a long distance, the result is a very low number, although the product may be producing a lot of noise.

Sound power levels take measurement distance and method into account and yield the actual noise level emitted by the product. Sound pressure levels result from measuring only what reaches the sound meter. The only number valid to use for product comparisons is sound power level.

Where applicable, both numbers are quoted in the specification tables (Appendix A) to indicate the difference between the two numbers. Sound pressure numbers quoted are an average of nine points that lie on a parallelepiped whose surfaces are one metre from every product boundary.

**APPENDIX A**  
**HEWLETT-PACKARD**  
**DISC/TAPE DRIVE SPECIFICATIONS**



Table A-1. HP 7907A Disc Drive Specifications

## PRODUCT SPECIFICATIONS AND CHARACTERISTICS

### NOTE

The following information stipulates the operating specifications and characteristics of this device/subsystem when installed and operated within the limits specified under ENVIRONMENTAL REQUIREMENTS found elsewhere in this table.

### Operating Specifications

#### DISC DRIVE OPERATING SPECIFICATIONS

Average controller overhead time:	4.0 ms
Average seek time:	30.0 ms
Average rotational delay:	8.5 ms
Average time to transfer 1 kbyte (at 625 kbytes/sec):	<u>1.8 ms</u>
Total average transaction time (excluding system overhead):	44.3 ms
Disc performance index:	22.6*

*\*Maximum disc transactions per second, for 1 kbyte transfers, less system overhead. (Refers to fundamental disc performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.)*

#### DISC DRIVE DATA CAPACITY (formatted)

Item	Data Bits Per	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Byte	8				
Sector	2048	256			
Track	131,072	16,384	64		
Head	82,182,144	10,272,768	40,128	627	
Removable	164,364,288	20,545,536	80,256	1254	2
Total	328,728,576	41,091,072	160,512	2508	4

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-1. HP 7907A Disc Drive Specifications (cont.)

**PHYSICAL CHARACTERISTICS****Weight**

Net:	24.9 kg (55 lb)
Shipping:	29.1 kg (64.2 lb)

**Dimensions**

Height (with feet):	180.3 mm (7.1 in.)
Height (without feet):	174.1 mm (6.9 in.)
Width:	325.1 mm (12.8 in.)
Depth (includes HP-IB connector):	487.7 mm (19.2 in.)

**Service Clearance Needed**

Front:	177.8 cm (7 in.)
Rear:	10.2 cm (4 in.)
Left side:	0 cm (0 in.)
Right side:	0 cm (0 in.)

**Operating Characteristics****POWER CHARACTERISTICS**

Voltages (true RMS):	
115V setting;	100V, 115V, 120V, single phase (inclusive tolerance range is 90V to 132V)
230V setting;	230V, 240V, single phase (inclusive tolerance range is 180V to 264V)
Frequency:	47.5 to 66 Hz
Maximum Power (during spin up):	
115V setting;	200 Watts (90V, 60Hz)
230V setting;	200 Watts (180V, 60Hz)
Typical Power:	
115V setting;	145 Watts (115V, 60Hz)
230V setting;	145 Watts (230V, 50Hz)
Maximum Current (occurs during spin-up):	
115V setting;	3.0A (true RMS at 90V, 60Hz)
230V setting;	1.7A (true RMS at 180V, 50Hz)
Typical Current:	
115V setting;	1.7A (true RMS at 115V, 60Hz)
230V setting;	1.0A (true RMS at 230V, 50Hz)

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-1. HP 7907A Disc Drive Specifications (cont.)

Line Dropout:	No effect on performance; no operator intervention required for dropout equal to or less than 1/2 cycle(s) of the ac line frequency (20 ms, 50 Hz; 16.7 ms, 60 Hz).	
<b>HEAT DISSIPATION</b>		
Maximum (during spin up):	200 Watts (683 Btu/hr; 172 Kcals/hr)	
Typical:	145 Watts (495 Btu/hr; 125 Kcals/hr)	
<b>ACOUSTIC EMISSIONS</b>		
Average sound pressure level ( $\overline{L}_{pA}$ ):	54 dB(A)	
Sound power level ( $L_{WA}$ ):	67 dB(A)	
<b>ELECTROMAGNETIC EMISSIONS</b>		
Radiated and conducted interference:		
<ul style="list-style-type: none"> <li>• HP 7907 -- For U.S.A., meets FCC docket 20780 for Class A computing peripheral devices.</li> <li>• HP 7907 -- for Europe, meets VDE 0871 for Level B computing devices. FTZ licensed on some HP systems. Refer to your local sales representative for more information.</li> </ul>		
Magnetic operating:	<5 gauss on all surfaces	
Magnetic nonoperating:	<5.25 milligauss at 4.6m (15 ft) on all surfaces	
<b>SAFETY</b>		
<ul style="list-style-type: none"> <li>• CSA certified to CSA 22.2 No. 154.</li> <li>• Meets all applicable safety standards of IEC 380 and IEC 435.</li> <li>• UL listed to UL 114 and UL 478.</li> </ul>		
<b>TILT</b>		
When mounted using an HP 19507A Rackmount Kit, the HP 7907 shall meet all performance specifications throughout a 360° rotation. Shock and vibration testing has not been performed on the HP 7907 while being tilted.		
<i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i>		

Table A-1. HP 7907A Disc Drive Specifications (cont.)

## ENVIRONMENTAL REQUIREMENTS

Note: The environmental specifications listed herein apply when this device is not connected to a Hewlett-Packard (HP) system. When this device is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

### POWER REQUIREMENTS

Voltages (true RMS): 115V setting;	100V, 115V, 120V, single phase (inclusive tolerance range is 90V to 132V)
230V setting;	230V, 240V, single phase (inclusive tolerance range is 180V to 264V)
Frequency:	47.5 to 66 Hz
Maximum Power: 115V setting (during spin up); 230V setting;	270 Voltamps (90V, 60Hz) 306 Voltamps (230V, 50Hz)
Typical Power: 115V setting; 230V setting;	195 Voltamps (90V, 60Hz) 230 Voltamps (230V, 50Hz)
Maximum Current (occurs during spin-up): 115V setting; 230V setting;	3.0A (true RMS at 90V, 60Hz) 1.7A (true RMS at 180V, 50Hz)
Typical Current: 115V setting; 230V setting;	1.7A (true RMS at 115V, 60Hz) 1.0A (true RMS at 230V, 50Hz)
Line Surge and Sag:	80% and 120% typical line voltage for 30 sec. 70% and 130% typical line voltage for 0.5 sec.
Line Dropout:	Must not exceed 1/2 cycle, 10 ms at 50 Hz or 1/2 cycle 8.3 ms at 60 Hz.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-1. HP 7907A Disc Drive Specifications (cont.)

<b>TEMPERATURE</b>	
Recommended operating range:	20 °C to 25.5 °C (68 °F to 78 °F)
Operating range:	10 °C to 40 °C ( 50 °F to 104 °F)
Nonoperating range:	-40 °C to 75 °C (-40 °F to 167 °F)
Maximum rate of change:	20 °C (36 °F) per hour
<b>HUMIDITY</b>	
Operating:	5% to 95% relative humidity, noncondensing
Nonoperating:	5% to 95% relative humidity, noncondensing
<b>VIBRATION*</b>	
Operating (See Figure 2-3)	Random vibration with power spectral density (PSD) of 0.0001 g <sup>2</sup> /Hz from 5 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of 0.00005 g <sup>2</sup> /Hz at 500 Hz.
Nonoperating (See Figure 2-4)	Random vibration with power spectral density (PSD) of 0.015 g <sup>2</sup> /Hz from 5 to 100 Hz; -6 dB/octave from 100 to 137 Hz; PSD of 0.008 g <sup>2</sup> /Hz from 137 to 350 Hz; -6 dB/ octave from 350 to 500 Hz; PSD of 0.0039 g <sup>2</sup> /Hz at 500 Hz.
<b>SHOCK*</b>	
Recommended operating range:	<1.33g
Operating:	4 g maximum at 11 ms, half sine waveform
Nonoperating:	20 g maximum at 11 ms, half sine waveform
*Shock and Vibration specifications assumes the product is in an upright position	
<i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i>	

Appendix A

Table A-1. HP 7907A Disc Drive Specifications (cont.)

<b>ALTITUDE</b>	
Operating:	maximum 3 000 m (9,840 ft)
Nonoperating:	maximum 15 000 m (49,200 ft)
<b>ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE</b>	
Radiated:	14 kHz to 1 GHz, <1 V/m
Recommended limit:	<0.5 V/m
Conducted:	30 Hz to 50 kHz, <3 V rms
Recommended limit:	<1 V rms
Recommended limit:	50 kHz to 400 MHz, <1V peak-to-peak <0.5 peak-to-peak
Electrostatic Discharge:	<15 kV
Recommended limit:	<5 kV
Magnetic:	<1 gauss, 47.5 to 190 Hz
Power line transients (per IEEE Standard P587.1/F):	
Oscillatory wave (100 kHz ringing wave);	<1.5 kV and <50 A (open circuit voltage)
Recommended limit:	<500V
Unidirectional wave (one 20 us wide pulse);	<1.0 kV and <100 A (open circuit voltage)
Recommended limit:	<500V
<i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i>	

Table A-2. HP 7911, 7912 and 7914 Disc/Tape Drives Specifications

**OPERATING SPECIFICATIONS****DISC DRIVE**

	<u>7911/7912</u>	<u>7914</u>
Average controller overhead time:	4.0 ms	4.0 ms
Average seek time:	27.1 ms	28.1 ms
Average rotational delay:	8.3 ms	8.3 ms
Average time to transfer 1 kbyte:	<u>1.2 ms</u>	<u>1.2 ms</u>
Total average transaction time (excluding system overhead):	40.6 ms	41.6 ms
Disc performance index:	24.6*	24.0*

\*Maximum disc transactions per second, for 1 kbyte transfers, less system overhead.

*Refers to fundamental disc performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.*

**TAPE DRIVE**

<b>Speed</b>	
Read/write:	152.4 cm/s (60 in./s)
Search:	228.6 cm/s (90 in./s)
<b>Data Transfer Rate</b>	
System dependent (35 kbytes/s maximum)	

**OPERATING CHARACTERISTICS****DISC DRIVE DATA CAPACITY (formatted)**

Item	Data Bits Per	Data Bytes Per	Sectors Per	Tracks Per
Byte	8			
Word	16	2		
Sector	2,048	256		
Track	131,072	16,384	64*	
Head (7911,7912)	74,973,184	9,376,148	36,608	572*
Head (7914)	150,994,944	18,874,368	73,728	1,152*
HP 7911#	224,919,552	28,114,944	109,824	1,716
HP 7912#	524,812,228	65,601,536	256,256	4,004
HP 7914#	1,056,964,608	132,120,576	516,096	8,064

\* Total number of tracks per 7911/7912 head is 582, and total number of tracks per 7914 head is 1,164. Eight tracks are used as spares for defective track allocation and two are used for maintenance tracks on all models. The 7914 has two additional tracks reserved for future use. Total number of sectors per track is 65, with one used as a spare.

# The HP 7911, HP 7912, and HP 7914 utilize two heads per surface.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Appendix A

Table A-2. HP 7911, 7912 and 7914 Disc/Tape Drives Specifications (continued)

**TAPE DRIVE DATA CAPACITY (HP 88140S/88140SC, 150 ft)**

Item	Data Bits Per	Data Bytes Per	Data Words Per	Sectors Per	Tracks Per
Byte	8				
Word	16	2			
Block	8,192	1,024	512		
Track	8,372,224	1,046,528	523,264	1,022	
Cartridge	133,955,584	16,744,448	8,372,224	16,352*	16

\*Total number of blocks per 150 ft. cartridge is 16,624 with 32 of them utilized as spares and 240 of them used as maintenance blocks.

**TAPE DRIVE DATA CAPACITY (HP 88140L/88140LC, 600 ft)**

Item	Data Bits Per	Data Bytes Per	Data Words Per	Sectors Per	Tracks Per
Byte	8				
Word	16	2			
Block	8,192	1,024	512		
Track	33,488,896	4,186,112	2,093,056	4,088	
Cartridge	535,822,336	66,977,792	33,488,896	65,408**	16

\*Total number of blocks per 600 ft. cartridge is 65,776 with 128 of them utilized as spares and 240 of them used as maintenance blocks.

**HEAT DISSIPATION**

700 watts (2389 Btu/hr) maximum

**ELECTROMAGNETIC EMISSIONS**

Radiated and conducted interference:

- HP 7911/HP 7912/HP 7914 P/R-- For U.S.A., designed to meet FCC docket 20780 for Class A computing peripheral devices.
- HP 7911/HP 7912/HP 7914 P/R-- For Europe, designed to meet VDE 0871 for Level A computing devices. FTZ licensed on some HP systems. Refer to your local sales representative for more information.
- HP 7911/HP 7912/HP 7914 R-- The rackmount version is intended for installation in an overall product that will affect the emissions characteristics. It is recommended that end-use products be tested for RFI emissions.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-2. HP 7911, 7912 and 7914 Disc/Tape Drives Specifications (continued)

Magnetic nonoperating:	<2 milligauss at 2m (7 ft) on all surfaces	
Magnetic operating:	<5 gauss at any surface	
<b>ACOUSTIC EMISSIONS</b>		
HP 791X P Models average sound pressure level ( $\overline{L}_{pA}$ ):	54 dB(A)	
HP 791X P Models sound power level ( $L_{WA}$ ):	68 dB(A)	
HP 791X R Models--not specified due to a variety of rackmount configurations		
<b>SAFETY</b>		
<ul style="list-style-type: none"> <li>• HP 7911/HP 7912/HP 7914 P/R -- CSA certified to CSA 22.2 No. 154</li> <li>• HP 7911/HP 7912/HP 7914 P/R -- Meet all applicable safety standards of IEC 380 and IEC 435.</li> <li>• HP 7911/HP 7912/HP 7914 P -- UL listed to UL 114 and UL 478.</li> <li>• HP 7911/HP 7912/HP 7914 R -- UL recognized to UL 114 and UL 478.</li> </ul>		
<b>PHYSICAL CHARACTERISTICS</b>		
Dimensions	<u>HP 7911R/7912R/7914R</u>	<u>HP 7911P/7912P/7914P</u>
Height:	See figure A-2.	720 mm (28.3 in.)
Width:	See figure A-2.	354 mm (14.0 in.)
Depth:	See figure A-2.	711 mm (28.0 in.)
Weight		
Net:	67.2 kg (148 lb)	85.4 kg (188 lb)
Shipping:	89.9 kg (198 lb)	117.1 kg (258 lb)
<b>POWER CHARACTERISTICS</b>		
Voltage:	100, 120, 220, 240V; +5%,-10%	
Frequency:	50 Hz, 60 Hz; +10%, -5%*	
Phase:	Single	
Current:	8 amperes maximum at 120 Vac, 60 Hz	
Power:	700 watts maximum	
Line dropout:	No effect on performance; no operator intervention required for dropout equal to or less than one-half cycle of the ac line frequency (10.6 ms, 50 Hz; 8.3 ms, 60 Hz).	
<b>ENVIRONMENTAL REQUIREMENTS</b>		
<p>Note: The environmental specifications listed herein apply when this device is not connected to a Hewlett-Packard (HP) system. When this device is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.</p>		
The following specifications were type-tested under controlled conditions. Hewlett-Packard		
*The HP 7911/HP 7912/HP 7914 Disc/Tape Drives require a pulley and belt change when changing between 50 Hz and 60 Hz.		
<p style="text-align: center;"><i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i></p>		

Table A-2. HP 7911, 7912 and 7914 Disc/Tape Drives Specifications (continued)

maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

---

**TEMPERATURE**

Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	10°C to 40°C (50°F to 104°F)
Nonoperating range:	-40°C to 60°C (-40°F to 140°F)
Maximum rate of change:	10°C (18°F) per hour

---

**HUMIDITY**

Operating:	20% to 80% relative humidity, noncondensing and with a maximum of 0.015 kg of water per kg of dry air. For example, this is equivalent to a maximum of 80% relative humidity at 24°C (75°F), a maximum of 50% relative humidity at 32°C (90°F), or a maximum of 32% relative humidity at 40°C (104°F).
Nonoperating:	10% to 90% relative humidity, noncondensing, and with wet bulb temperature not to exceed 25.6°C (78°F). For example this is equivalent to a maximum of 90% relative humidity at 27°C (81°F), a maximum of 50% relative humidity at 34°C (93°F), or a maximum of 32% relative humidity at 40°C (104°F).

---

**VIBRATION**

Operating: (See Figure 2-1)	Random vibration with power spectral density (PSD) of $2.5 \times 10^{-5} \text{ g}^2/\text{Hz}$ from 5 to 10 Hz; 7.5 dB/octave from 10 to 25 Hz; PSD of $2.5 \times 10^{-4} \text{ g}^2/\text{Hz}$ from 25 to 30 Hz; -24 dB/octave from 30 to 40 Hz; PSD of $2.5 \times 10^{-5} \text{ g}^2/\text{Hz}$ from 40 to 2000 Hz; -9.3 dB/octave from 2000 to 2500 Hz; PSD of $1.25 \times 10^{-5} \text{ g}^2/\text{Hz}$ at 2500 Hz.
R Models Only	
Operating: P Models Only	Random vibration with power spectral density (PSD) of $9 \times 10^{-6} \text{ g}^2/\text{Hz}$ from 5 to 2500 Hz.
Nonoperating (See Figure 2-2)	Random vibration with power spectral density of 0.0005 $\text{g}^2/\text{Hz}$ from 10 to 2000 Hz.

---

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-2. HP 7911, 7912 and 7914 Disc/Tape Drives Specifications (continued)

<b>SHOCK</b>	
<b>Recommended operating range:</b>	<0.67 g's
Operating:	2g maximum at 11 ms, half sine waveform
<hr/>	
<b>ALTITUDE</b>	
Operating:	maximum 4 600 m (15,000 ft)
Nonoperating:	maximum 15 000 m (49,200 ft)
<hr/>	
<b>ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE</b>	
This disc drive has been successfully type tested under conditions of radiated and conducted interference. Operation at levels exceeding these may result in degraded performance and is not covered under warranty.	
Radiated:	14 kHz to 1 GHz, up to 3 V/m
<b>Recommended limit:</b>	14 kHz to 1 GHz, <0.5 V/m
Conducted:	30 Hz to 50 kHz, <3V rms
<b>Recommended limit:</b>	<1 V rms
	50 kHz to 400 MHz, <1V peak-to-peak
<b>Recommended limit:</b>	<0.5 V/m
Electrostatic Discharge:	$\leq 12.5$ kV
<b>Recommended limit:</b>	<5 kV
Magnetic:	47.5 Hz to 198 Hz, <5 gauss
Power line transients (per IEEE Standard P587.1/F)	
Oscillatory wave (100 kHz ringing wave):	<1.5 kV
<b>Recommended limit:</b>	<500V
Unidirectional wave (one 20 us wide pulse):	<1.0 kV
<b>Recommended limit:</b>	<500V
<hr/>	
<b>POWER REQUIREMENTS</b>	
<b>Recommended limit:</b>	The daily average not to vary more than $\pm 2\%$ from the correct voltage
Voltage:	100, 120, 220, 240V; +5%, -10%
Frequency:	50 Hz, 60 Hz; +10%, -5%*
<b>Recommended frequency:</b>	47.5 to 52.5 Hz, 57 to 66 Hz
Phase:	Single
Current:	8 amperes maximum at 120 Vac, 60 Hz
Distortion:	5% peak and flat harmonic distortion
Line Surge and Sag:	80% and 120% typical line voltage for 30 sec. 70% and 130% typical line voltage for 0.5 sec.
<hr/>	
*The HP 7911/HP 7912/HP 7914 Disc/Tape Drives require a pulley and belt change when changing between 50 Hz and 60 Hz.	
<i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i>	

Appendix A

Table A-2. HP 7911, 7912 and 7914 Disc/Tape Drives Specifications (continued)

**TILT**

Can be operated in any position; however, the disc drive drive should not be rotated about its axis (vertical axis for the HP 7914P; horizontal axis for the HP 7914R) at a rate greater than 0.2 radians/second due to gyroscopic effects. Rotation beyond this rate can cause errors which require reinitialization of the media.

---

**COOLING REQUIREMENTS**

Allow 76.2 mm (3 in.) in front and behind for adequate air flow.

---

**SYSTEM CONFIGURATIONS \*\***

- Total cable length is limited to one metre per equivalent HP-IB load.
- Each HP 7911, HP 7912, or HP 7914 places one equivalent load on each of the HP-IB lines.
- In addition to the external HP-IB cable provided, each HP 7911, HP 7912, and HP 7914 has an internal 1-metre HP-IB cable that must be considered when configuring the disc drive with a system.

---

\*\*Consult the appropriate system configuration guide for specific constraints in conjunction with the host CPU.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

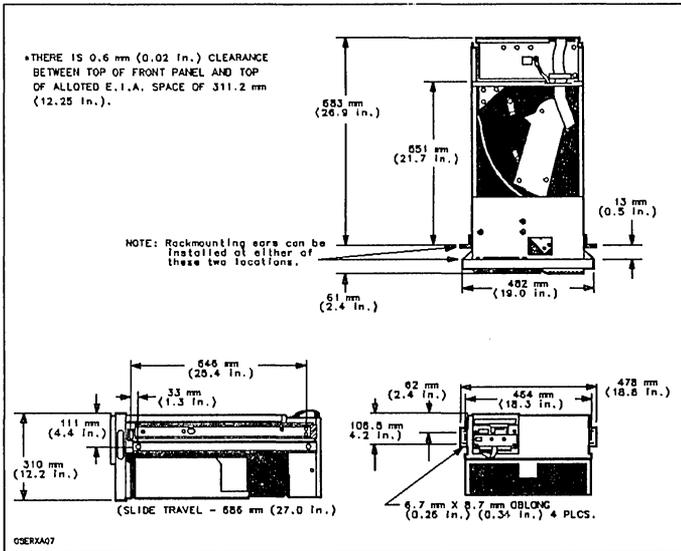


Figure A-1. HP 7911R/HP 7912R/HP 7914R Dimensions



Table A-3. HP 7914ST Subsystem Specifications

<b>PHYSICAL CHARACTERISTICS</b>	
<b>DIMENSIONS</b>	
Height:	160.0 cm (62.9 in.)
Width:	63.0 cm (24.8 in.)
Depth:	81.0 cm (31.9 in.)
<b>WEIGHT</b>	
<b>Net (total):</b>	
Standard:	269.0 kg (593 lb)
Option 114:	332.5 kg (733 lb)
<b>Shipping (total):</b>	
Standard (2 boxes):	294.8 kg (650 lb)
Option 114 (3 boxes):	383.7 kg (846 lb)
<b>OPERATING CHARACTERISTICS</b>	
<b>HEAT DISSIPATION</b>	
Standard:	1250 Watts (4266 Btu/hr) maximum
Option 240:	1300 Watts (4437 Btu/hr) maximum
Option 114:	1900 Watts (6485 Btu/hr) maximum
Option 240/114:	1950 Watts (6655 Btu/hr) maximum
<b>ELECTROMAGNETIC EMISSIONS</b>	
Radiated and conducted interference:	
	<ul style="list-style-type: none"> <li>• HP 7914ST -- For U.S.A., designed to meet FCC docket 20780 for Class A computing peripheral devices.</li> <li>• HP 7914ST -- for Europe, designed to meet VDE 0871 for Level A computing devices. FTZ licensed on some HP systems. Refer to your local sales representative for more information.</li> </ul>
Magnetic nonoperating:	<2 milligauss at 2m (7 ft) on all surfaces
Magnetic operating:	<5 gauss on all surfaces
<b>POWER CHARACTERISTICS</b>	
Voltage:	120, 220, 240V, single phase; +5%, -10%
Frequency:	50 Hz or 60 Hz; +10%, -5%*
<b>Power</b>	
Standard:	860 watts maximum at 66 Hz, 120V
Option 114:	1,440 watts maximum at 66 Hz, 120V
*The HP 7914 Disc Drive requires a pulley and belt change when changing between 50 Hz and 60 Hz.	
<i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i>	

Table A-3. HP 7914ST Subsystem Specifications (cont.)

Frequency:	50 Hz or 60 Hz; +10%, -5%*
Power	
Standard:	860 watts maximum at 66 Hz, 120V
Option 114:	1,440 watts maximum at 66 Hz, 120V
Current:	Maximum 16A at 120V, with two HP 7914R Disc Drives Maximum 8A at 220 or 240V, with two HP 7914R Disc Drives
Line Dropout:	No effect on performance; no operator intervention required for dropout equal to or less than one-half cycle of the ac line frequency (10.6 ms, 50 Hz; 8.3 ms, 60 Hz).
<b>ACOUSTIC EMISSIONS</b>	
Average sound pressure level ( $\overline{L}_{pA}$ ) [with one 7914 Disc Drive]:	52 dB(A)
Sound power level ( $L_{wA}$ ) [with one 7914 Disc Drive]:	68 dB(A)
Average sound pressure level ( $\overline{L}_{pA}$ ) [with two 7914 Disc Drives]:	54 dB(A)
Sound power level ( $L_{pA}$ ) [with two 7914 Disc Drives]:	70 dB(A)
<b>SAFETY</b>	
<ul style="list-style-type: none"> <li>• CSA certified to CSA 22.2 No. 154.</li> <li>• Meets all applicable safety standards of IEC 380 and IEC 435.</li> <li>• UL listed to UL 114 and UL 478.</li> </ul>	
<b>ENVIRONMENTAL REQUIREMENTS</b>	
<p>Note: The environmental specifications listed herein apply when this device is not connected to a Hewlett-Packard (HP) system. When this device is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.</p> <p>The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.</p>	
<b>TEMPERATURE</b>	
Recommended operating range:	20 °C to 25.5 °C (68 °F to 78 °F)
Operating range:	15 °C to 32 °C (59 °F to 90 °F)
*The HP 7914 Disc Drive requires a pulley and belt change when changing between 50 Hz and 60 Hz.	
<i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i>	

Table A-3. HP 7914ST Subsystem Specifications (cont.)

<b>HUMIDITY</b>	
Operating:	20% to 80% relative humidity, noncondensing and with maximum of 0.015 kg water per kg of dry air. For example, this is equivalent to a maximum of 80% relative humidity at 24 °C (75 °F), or a maximum of 50% relative humidity at 32 °C (90 °F).
Nonoperating:	10% to 90% relative humidity, noncondensing, and wet bulb temperature not to exceed 25.6 °C (78 °F). For example, this is equivalent to a maximum of 90% relative humidity at 27 °C (81 °F), a maximum of 50% relative humidity at 34 °C (93 °F), or a maximum of 32% relative humidity at 40 °C (104 °F).
<b>VIBRATION (Tested in vertical axis only)</b>	
Operating (See Figure 2-3)	Random vibration with power spectral density (PSD) of 0.0001 g <sup>2</sup> /Hz from 5 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of 0.00005 g <sup>2</sup> /Hz at 500 Hz.
Nonoperating (See Figure 2-4)	Random vibration with power spectral density (PSD) of 0.015 g <sup>2</sup> /Hz from 5 to 100 Hz; -6 dB/octave from 100 to 137 Hz; PSD of 0.008 g <sup>2</sup> /Hz from 137 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of 0.0039 g <sup>2</sup> /Hz at 500 Hz.
<b>SHOCK</b>	
Recommended operating range: Operating:	<0.67 g's 2 g maximum at 11 ms, half sine waveform
<b>ALTITUDE</b>	
Operating: Nonoperating:	maximum 3 000m (9,840 ft) maximum 15 000m (49,200 ft)
<b>ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE</b>	
Radiated:	14 kHz to 1 GHz, up to 1 V/m
Recommended limit:	14 kHz to 1 GHz, <0.5 V/m
Conducted:	30 Hz to 50 kHz, up to 3 V/m
Recommended limit:	50 kHz to 400 MHz, <1V peak-to-peak <0.5 V/m
Electrostatic Discharge:	<10.0 kV
Recommended limit:	<5kV
Magnetic:	<1 gauss, 47.5 to 198 Hz
Power line transients (per IEEE Standard P587.1/F)	
Oscillatory wave (100 kHz ringing wave):	<1.5 kV and <50 A (open circuit voltage)
Recommended limit:	<500V
<i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i>	

Appendix A

Table A-3. HP 7914ST Subsystem Specifications (cont.)

Unidirectional wave (one 20 us wide pulse):	<1.0 kV and <100 A (open circuit voltage)
Recommended limit:	<500V
<b>POWER REQUIREMENTS</b>	
Voltage:	120, 220, 240, single phase; +5%, -10%
Recommended limit:	The daily average not to vary more than $\pm 2\%$ from the correct voltage
Frequency:	50 Hz or 60 Hz; +10%, -5%**
Recommended Limit:	47.5 to 52.5 Hz; 57 to 63 Hz
Power	
Standard:	860 watts maximum at 66 Hz, 120V
Option 114:	1,440 watts maximum at 66 Hz, 120V
Current:	Maximum 16A at 120V, with two HP 7914R Disc Drives Maximum 8A at 220 or 240V, with two HP 7914R Disc Drives
Distortion:	<5% peak and flat harmonic distortion
Line Surge and Sag:	80% and 120% typical line voltage for 30 sec. 70% and 130% typical line voltage for 0.5 sec.
<b>TILT</b>	
<p>This product can be operated in any position; however, the disc drive should not be rotated about the horizontal axis perpendicular to its side at a rate greater than 0.2 radians/second due to gyroscopic effects. Rotation beyond this rate can cause errors which require reinitialization of the media.</p>	
<p>**The HP 7914 Disc Drive requires a pulley and belt change when changing between 50 Hz and 60 Hz.</p>	
<p><i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i></p>	

Table A-4. HP 7914TD Disc/Tape Subsystem Specifications

**PHYSICAL CHARACTERISTICS****DIMENSIONS**

Height:	161.3 cm (63.5 in.)
Width:	63.5 cm (25.0 in.)
Depth:	81.3 cm (32.0 in.)

**WEIGHT**

Net (total)	
Standard:	272.2 kg (600 lb)
Option 114:	339.4 kg (748 lb)
Shipping (total)	
Standard (2 boxes):	364.7 kg (804 lb)
Option 114 (3 boxes):	454.6 kg (1,002 lb)

**OPERATING CHARACTERISTICS****ELECTROMAGNETIC EMISSIONS**

Radiated and conducted interference:

- HP 7914TD -- For U.S.A., designed to meet FCC Docket 20780 for Class A computing peripheral devices.

- HP 7914TD -- For Europe, designed to meet VDE 0871 for Level A computing devices. FTZ licensed on some HP systems. Refer to your local sales representative for more information.

Magnetic nonoperating:

 $\leq 2$  milligauss at 2 m (7 ft) on all surfaces

Magnetic operating:

 $\leq 5$  gauss on all surfaces**POWER CHARACTERISTICS**

Voltage:	120, 240V, single phase; +5%, -10%
	220V, single phase; $\pm 5\%$
Frequency:	208, 240V, 2 phase; +5%, -10%
	50 Hz or 60 Hz; +10%, -5%*

\*The HP 7914 Disc Drive requires a pulley and belt change when changing between 50 Hz and 60 Hz.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-4. HP 7914TD Disc/Tape Subsystem Specifications (cont.)

Power	
Standard:	925 watts maximum at 66 Hz, 120V
Option 114:	1,625 watts maximum at 66 Hz, 120V
Current:	Maximum 16A at 120V, with two 7914R Disc Drives Maximum 8A at 220 or 240V, with two 7914R Disc Drives
Line Dropout:	No effect on performance; no operator intervention required for dropout equal to or less than one-half cycle of the ac line.
<b>ACOUSTIC EMISSIONS</b>	
Average sound pressure level ( $\overline{L}_{pA}$ ) [with two 7914 Disc Drives]:	60 dB(A)
Sound power level ( $L_{wA}$ ) [with two 7914 Disc Drives]:	76 dB(A)
<b>SAFETY</b>	
<ul style="list-style-type: none"> <li>• CSA certified to CSA 22.2 No. 154.</li> <li>• Meets all applicable safety standards of IEC 380 and IEC 435.</li> <li>• UL listed to UL 114 and UL 478.</li> </ul>	
<b>ENVIRONMENTAL REQUIREMENTS</b>	
<p>Note: The environmental specifications listed herein apply when this device is not connected to a Hewlett-Packard (HP) system. When this device is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.</p> <p>The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.</p>	
<b>TEMPERATURE</b>	
Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	10°C to 40°C (50°F to 104°F)
Nonoperating range:	-40°C to 60°C (-40°F to 140°F)
Maximum rate of change:	10°C (18°F) per hour
<b>HUMIDITY</b>	
Operating:	20% to 80% relative humidity, noncondensing and with maximum of 0.015kg water per kg of dry air. For example, this is equivalent to a maximum of 80% relative humidity at 24°C (75°F), a maximum of 50% relative humidity at 32°C (90°F), or a maximum of 32% relative humidity at 40°C (104°F).
<p><i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i></p>	

Table A-4. HP 7914TD Disc/Tape Subsystem Specifications (cont.)

Nonoperating:	10% to 90% relative humidity, noncondensing and wet bulb temperature not to exceed 25.6 °C (78 °F). For example, this is equivalent to a maximum of 90% relative humidity at 27 °C (81 °F), a maximum of 50% relative humidity at 34 °C (93 °F), or a maximum of 32% relative humidity at 40 °C (104 °F).
<b>VIBRATION</b>	
Operating (See Figure 2-1)	Random vibration with power spectral density (PSD) of $2.5 \times 10^{-5} \text{ g}^2/\text{Hz}$ from 5 to 10 Hz; 7.5 dB/octave from 10 to 25 Hz; PSD of $2.5 \times 10^{-4} \text{ g}^2/\text{Hz}$ from 25 to 30 Hz; -24 dB/octave from 30 to 40 Hz; PSD of $2.5 \times 10^{-5} \text{ g}^2/\text{Hz}$ from 40 to 2000 Hz; -9.3 dB/octave from 2000 to 2500 Hz; PSD of $1.25 \times 10^{-5} \text{ g}^2/\text{Hz}$ at 2500 Hz.
Nonoperating (See Figure 2-2)	Random vibration with a power spectral density of 0.0005 $\text{g}^2/\text{Hz}$ from 10 to 2000 Hz.
<b>SHOCK</b>	
Recommended operating range: Operating:	<0.67 g's 2g maximum at 11 ms, half sine waveform
<b>ALTITUDE</b>	
Operating: Nonoperating:	maximum 3 000 m (9840 ft.) maximum 3 000 m (9840 ft.)
<b>ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE</b>	
Radiated:	14 kHz to 1 GHz, up to 1 V/m
Recommended limit:	14 kHz to 1 GHz, <0.5 V/m
Conducted:	30 Hz to 50 kHz, up to 3 V/m
Recommended limit:	50 kHz to 400 MHz, $\leq 1$ V peak-to-peak <0.5 V/m
Electrostatic Discharge:	$\leq 1.5$ kV at the 7970 Tape Drive control panel <750V
Recommended limit:	<750V
Magnetic:	$\leq 1$ gauss, 47.5 to 198 Hz
Power line transients (per IEEE Standard P587.1/F)	
Oscillatory wave (100 kHz ringing wave):	$\leq 1.5$ kV and $\leq 50$ A
Recommended limit:	<500V
Unidirectional wave (one 20 $\mu$ s wide pulse):	1.0 kV
Recommended limit:	<500V
<b>*The HP 7914 Disc Drive requires a pulley and belt change when changing between 50 Hz and 60 Hz.</b>	
<i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i>	

Appendix A

Table A-4. HP 7914TD Disc/Tape Subsystem Specifications (cont.)

**POWER REQUIREMENTS**

Voltage:	120, 240V, single phase; +5%, -10% 220V, single phase; ±5%
Frequency:	208, 240V, 2 phase; +5%, -10% 50 Hz or 60 Hz; +10%, -5%*
Recommended limit:	47.5 to 52.5 Hz; 57 to 63 Hz
Power	
Standard:	925 watts maximum at 66 Hz, 120V
Option 114:	1,625 watts maximum at 66 Hz, 120V
Current:	maximum 16A at 120V, with two 7914R Disc Drives maximum 8A at 220 or 240V, with two 7914R Disc Drives
Distortion:	5% peak and flat harmonic distortion
Line Surge and Sag:	80% and 120% typical line voltage for 30 sec. 70% and 130% typical line voltage for 0.5 sec.

\*The HP 7914 Disc Drive requires a pulley and belt change when changing between 50 Hz and 60 Hz.

**TILT**

The tape drive has not been tested for tilt. The disc drive can be operated in any position; however, the disc drive should not be rotated about the horizontal axis perpendicular to its side at a rate greater than 0.2 radians/second due to gyroscopic effects. Rotation beyond this rate can cause errors which require reinitialization of the media.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-5. HP 7914CT Disc/Tape Drive Specifications

**OPERATING SPECIFICATIONS****DISC DRIVE**

Average controller overhead time:	4.0 ms
Average seek time:	28.1 ms
Average rotational delay:	8.3 ms
Average time to transfer 1 kbyte:	<u>1.2 ms</u>
Total average transaction time (excluding system overhead):	41.6 ms
Disc performance index:	24.0*

\*Maximum disc transactions per second, for 1 kbyte transfers, less system overhead.

Refers to fundamental disc performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.

**TAPE DRIVE****Speed**

Read/write: 152.4 cm/s (60 in./s)

Search: 228.6 cm/s (90 in./s)

**Data Transfer Rate**

System dependent (35 kbytes/s maximum)

**OPERATING CHARACTERISTICS****DISC DRIVE DATA CAPACITY (formatted)**

Item	Data Bits Per	Data Bytes Per	Sectors Per	Tracks Per
Byte	8			
Word	16	2		
Sector	2,048	256		
Track	131,072	16,384	64*	
Head (7914)	150,994,944	18,874,368	73,728	1,152*
HP 7914#	1,056,964,608	132,120,576	516,096	8,064

\* Total number of tracks per 7914 head is 1,164. Eight tracks are used as spares for defective track allocation and two are used for maintenance tracks on all models. The 7914 has two additional tracks reserved for future use. Total number of sectors per track is 65, with one used as a spare.

# The HP 7914 uses two heads per surface.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-5. HP 7914CT Disc/Tape Drive Specifications (continued)

**TAPE DRIVE DATA CAPACITY (HP 88140S/88140SC, 150 ft)**

Item	Data Bits Per	Data Bytes Per	Data Words Per	Sectors Per	Tracks Per
Byte	8				
Word	16	2			
Block	8,192	1,024	512		
Track	8,372,224	1,046,528	523,264	1,022	
Cartridge	133,955,584	16,744,448	8,372,224	16,352*	16

\*Total number of blocks per 150 ft. cartridge is 16,624 with 32 of them utilized as spares and 240 of them used as maintenance blocks.

**TAPE DRIVE DATA CAPACITY (HP 88140L/88140LC, 600 ft)**

Item	Data Bits Per	Data Bytes Per	Data Words Per	Sectors Per	Tracks Per
Byte	8				
Word	16	2			
Block	8,192	1,024	512		
Track	33,488,896	4,186,112	2,093,056	4,088	
Cartridge	535,822,336	66,977,792	33,488,896	65,408**	16

\*Total number of blocks per 600 ft. cartridge is 65,776 with 128 of them utilized as spares and 240 of them used as maintenance blocks.

**HEAT DISSIPATION**

700 watts (2389 Btu/hr) maximum

**ELECTROMAGNETIC EMISSIONS**

Radiated and conducted interference:

- HP 7914CT-- For U.S.A., designed to meet FCC docket 20780 for Class A computing peripheral devices.
- HP 7914CT-- For Europe, designed to meet VDE 0871 for Level A computing devices. FTZ licensed on some HP systems. Refer to your local sales representative for more information.

Magnetic nonoperating:

<2 milligauss at 2m (7 ft) on all surfaces

Magnetic operating:

<5 gauss at any surface

**ACOUSTIC EMISSIONS**

Average sound pressure level ( $\bar{L}_{pA}$ ):

50 dB(A)

Sound power level ( $L_{WA}$ ):

63 dB(A)

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-5. HP 7914CT Disc/Tape Drive Specifications (continued)

**SAFETY**

- HP 7914CT -- CSA certified to CSA 22.2 No. 154
- HP 7914CT -- Meets all applicable safety standards of IEC 380 and IEC 435.
- HP 7914CT -- UL listed to UL 114 and UL 478.

**PHYSICAL CHARACTERISTICS****Dimensions**

Height:	720 mm (28.3 in.)
Width:	375 mm (14.8 in.)
Depth:	777 mm (30.8 in. including baffle)

**Weight**

Net:	109 kg (239 lb)
Shipping:	Disc Drive: 135 kg (297 lb) Tape Drive: 9 kg (19 lb)

**POWER CHARACTERISTICS**

Voltage:	100, 120, 220, 240V; +5%, -10%
Frequency:	50 Hz, 60 Hz; +10%, -5%*
Phase:	Single
Current:	8 amperes maximum at 120 Vac, 60 Hz
Power:	700 watts maximum
Line dropout:	No effect on performance; no operator intervention required for dropout equal to or less than one-half cycle of the ac line frequency (10.6 ms, 50 Hz; 8.3 ms, 60 Hz).

**ENVIRONMENTAL REQUIREMENTS**

Note: The environmental specifications listed herein apply when this device is not connected to a Hewlett-Packard (HP) system. When this device is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

\*The HP 7914CT Disc/Tape Drive require a pulley and belt change when changing between 50 Hz and 60 Hz.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-5. HP 7914CT Disc/Tape Drive Specifications (continued)

<b>TEMPERATURE</b>	
Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	10°C to 40°C (50°F to 104°F)
Nonoperating range:	-40°C to 60°C (-40°F to 140°F)
Maximum rate of change:	10°C (18°F) per hour
<b>HUMIDITY</b>	
Operating:	20% to 80% relative humidity, noncondensing, with a maximum of 0.015 kg of water per kg of dry air and wet bulb temperature not to exceed 24°C (75°F). For example, this is equivalent to a maximum of 80% relative humidity at 24°C (75°F), a maximum of 50% relative humidity at 32°C (90°F), or a maximum of 27% relative humidity at 40°C (104°F).
Nonoperating:	10% to 90% relative humidity, noncondensing, and wet bulb temperature not to exceed 25.6°C (78°F). For example, this is equivalent to a maximum of 90% relative humidity at 27°C (81°F), a maximum of 50% relative humidity at 34°C (93°F), or a maximum of 32% relative humidity at 40°C (104°F).
<b>VIBRATION</b>	
Operating:	Random vibration with power spectral density of $9 \times 10^{-6} \text{ g}^2/\text{Hz}$ from 10 to 2500 Hz.
Nonoperating (See Figure 2-2)	Random vibration with power spectral density of $0.0005 \text{ g}^2/\text{Hz}$ from 10 to 2000 Hz.
<b>SHOCK</b>	
Recommended operating range:	<0.67 g's
Operating:	2 g maximum at 11 ms, half sine waveform
<b>ALTITUDE</b>	
Operating:	maximum 4 600m (15,000 ft)
Nonoperating:	maximum 15 000m (49,200 ft)
<p><i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i></p>	

Table A-5. HP 7914CT Disc/Tape Drive Specifications (continued)

**ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE**

This disc drive has been successfully type tested under conditions of radiated and conducted interference. Operation at levels exceeding these may result in degraded performance and is not covered under warranty.

Radiated:	14 kHz to 1 GHz, up to 3 V/m
Recommended limit:	<0.5 V/m
Conducted:	30 Hz to 50 kHz, <3V rms
Recommended limit:	50 kHz to 400 MHz, <1V peak-to-peak
Recommended limit:	<0.5 V/m
Electrostatic Discharge:	12.5 kV
Recommended limit:	<5 kV
Magnetic:	47.5 Hz to 198 Hz, <5 gauss
Power line transients (per IEEE Standard P587.1/F)	
Oscillatory wave (100 kHz ringing wave):	1.5 kV
Recommended limit:	<500V
Unidirectional wave (one 20 us wide pulse):	1.0 kV
Recommended limit:	<500V

**POWER REQUIREMENTS**

Recommended limit:	The daily average not to vary more than $\pm 2\%$ from correct value
Voltage:	100, 120, 220, 240V; +5%, -10%
Frequency:	50 Hz, 60 Hz; +10%, -5%
Recommended limit:	47.5 to 52.5 Hz; 57 to 63 Hz**
Phase:	Single
Current:	8 amperes maximum at 120 Vac, 60 Hz
Distortion:	5% peak and flat harmonic distortion
Line Surge and Sag:	80% and 120% typical line voltage for 30 sec. 70% and 130% typical line voltage for 0.5 sec.
Neutral-to-Ground Noise:	<10V peak-to-peak
Recommended limit:	<1V peak-to-peak
Ground-to-Ground Noise:	<10V peak-to-peak
Recommended limit:	<1V peak-to-peak

**TILT**

This product can be operated in any position; however, the disc drive should not be rotated about its vertical axis at a rate greater than 0.2 radians/second due to gyroscopic effects. Rotation beyond this rate can cause errors which require reinitialization of the media.

**COOLING REQUIREMENTS**

Allow 76.2 mm (3 in.) in front and behind for adequate air flow.

\*\*The HP 7914CT Disc/Tape Drive require a pulley and belt change when changing between 50 Hz and 60 Hz.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-5. HP 7914CT Disc/Tape Drive Specifications (continued)

**SYSTEM CONFIGURATIONS \*\***

- Total cable length is limited to one metre per equivalent HP-IB load.
- In addition to the external HP-IB cable provided, each HP 7914CT has an internal 1-metre HP-IB cable that must be considered when configuring the disc drive with a system.
- In an HP 7914CT, each controller places one equivalent load on the HP-IB lines.

---

\*\*Consult the appropriate system configuration guide for specific constraints in conjunction with the host CPU.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-6. HP 7933H, HP 7935H, HP 7933XP, and HP 7935XP Disc Drives Specifications

**OPERATING SPECIFICATIONS**

	HP 7933XP/ HP 7935XP	HP 7933H HP 7935H
Average controller overhead time:	4.5 ms	3.5 ms
Average seek time:	24.0 ms	24.0 ms
Average rotational delay:	11.1 ms	11.1 ms
Average time to transfer 1 kbyte:	1.0 ms	1.0 ms
Controller cache impact:	-16.6 ms*	0.0 ms*
Total average transaction time (excluding system overhead):	24.0 ms	39.6 ms

Disc performance index: 41.7 ms\*\* 25.3 ms\*\*

\*The reduction in time is due to the reduced number of seeks required for a disc drive with controller cache. The actual performance improvement on a disc drive will vary, depending on the read hit rate and the read percentage; the listed values are based on a read hit rate of 70% and a read percentage of 70%.

Hit rate is defined as the number of times the disc drive finds information in cache divided by the number of times the information is requested from the disc drive.

\*\*Average disc transactions per second. Refers to fundamental disc drive performance; actual I/O rates are application dependent and must take into account system overhead, the system configuration, and the locality of data on the disc. The read hit rate and the read percentage will also have a significant impact on performance of the HP 793XP Disc Drive.

**OPERATING CHARACTERISTICS****DATA CAPACITY (formatted)**

Item	Data Bits Per	Data Bytes Per	Sectors Per	Tracks Per
Byte	8			
Word	16	2		
Sector	2,048	256		
Track	188,416	23,552	92*	
Surface	248,897,536	31,112,192	121,532	1,321*
Drive	3,235,667,968	404,458,496	1,579,916	17,173

\*Total number of tracks per surface is 1,339; six are used as spares for defective track allocation and 12 tracks are used for drive maintenance functions. Total number of sectors per track is 93, with one used as a spare.

**HEAT DISSIPATION**

1,100 watts (3,754 Btu/hr) average  
1,300 watts (4,437 Btu/hr) maximum

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Appendix A

Table A-6. HP 7933H, HP 7935H, HP 7933XP and HP 7935XP Disc Drives Specifications (continued)

<b>ELECTROMAGNETIC EMISSIONS</b>	
Radiated and conducted interference:	<ul style="list-style-type: none"><li>• For U.S.A., designed to meet FCC Docket 20780 for Class A computing peripheral devices.</li><li>• For Europe, designed to meet VDE 0871 for Level A computing devices. FTZ licensed on some HP systems. Refer to your local sales representative for more information.</li></ul>
Magnetic nonoperating:	<2 milligauss at 2 m (7 ft) on all surfaces
Magnetic operating:	<10 gauss at any surface
<b>ACOUSTIC EMISSIONS</b>	
Average sound pressure level ( $\overline{L}_{pA}$ ):	59 dB(A)
Sound power level ( $L_{wA}$ ):	73 dB(A)
<b>SAFETY</b>	
This disc drive meets all applicable safety standards of the following: IEC 380 and 435 UL 114 and 478 CSA C22.2 no. 154	
<b>PHYSICAL CHARACTERISTICS</b>	
Dimensions	
Height:	82.5 cm (32.5 in.)
Width:	55.2 cm (21.7 in.)
Depth:	83.4 cm (32.8 in.)
Weight	
Net:	154 kg (340 lb)
Shipping:	192 kg (423 lb)
<b>POWER CHARACTERISTICS</b>	
Voltage:	120, 208, 220, 240V; $\pm 10\%$
Frequency:	47.5 to 63 Hz
Phase:	Single
Power:	1,300 watts maximum
Current (nominal worst case):	
<i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i>	

Table A-6. HP 7933H, HP 7935H, HP 7933XP and HP 7935XP Disc Drives Specifications (continued)

Standard/ Option	Market Area	Voltage (VAC)	Disc Drive (A)	Accessory Outlet (A)	Total
Standard	USA	208	7.6	1.7	9.3
120	USA, Canada	120	13.0	3.0	16.0
210	Canada	208	7.6	1.7	9.3
220 221 222 223	Canada Continental Europe Switzerland Denmark	220	7.4	1.6	9.0
241 242	United Kingdom Australia, New Zealand	240	6.9	1.5	8.4

Line Dropout:

No effect on performance; no operator intervention required for dropout equal to or less than one-half cycle of the ac line frequency (10.6 ms, 50 Hz; 8.3 ms, 60 Hz).

## ENVIRONMENTAL REQUIREMENTS

Note: The environmental specifications listed herein apply when this device is not connected to a Hewlett-Packard (HP) system. When this device is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

### TEMPERATURE

Recommended Operating range: 20 °C to 25.5 °C (68 °F to 78 °F)  
 HP 7933 Operating range: 10 °C to 40 °C (50 °F to 104 °F)  
 HP 7935 Operating range: 10 °C to 32 °C (50 °F to 90 °F)  
 Nonoperating range: -40 °C to 65 °C (-40 °F to 149 °F)  
 Maximum rate of change: 20 °C (36 °F) per hour

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Appendix A

Table A-6. HP 7933H, HP 7935H, HP 7933XP and HP 7935XP Disc Drives Specifications (continued)

<b>HUMIDITY</b>	
Operating:	8% to 80% relative humidity, noncondensing and wet bulb temperature not to exceed 25.6 °C (78 °F). For example, this is equivalent to a maximum of 80% relative humidity at 28 °C (82 °F), a maximum of 50% relative humidity at 34 °C (93 °F), or a maximum of 32% relative humidity at 40 °C (104 °F).
Nonoperating: (Without a media module installed)	5% to 95% relative humidity, noncondensing and wet bulb temperature not to exceed 29.5 °C (85 °F). For example, this is equivalent to a maximum of 95% relative humidity at 30 °C (86 °F), a maximum of 50% relative humidity at 39 °C (102 °F), a maximum of 23% relative humidity at 50 °C (122 °F), or a maximum of 8% relative humidity at 65 °C (149 °F).
<b>VIBRATION</b>	
Operating (See Figure 2-1)	Random vibration with maximum power spectral density (PSD) of $2.5 \times 10^{-5} \text{ g}^2/\text{Hz}$ from 5 to 10 Hz; 7.5 dB/octave from 10 to 25 Hz; PSD of $2.5 \times 10^{-4} \text{ g}^2/\text{Hz}$ from 25 to 30 Hz; -24 dB/octave from 30 to 40 Hz; PSD of $2.5 \times 10^{-5} \text{ g}^2/\text{Hz}$ from 40 to 2000 Hz; -9.3 dB/octave from 2000 to 2500 Hz; PSD of $1.25 \times 10^{-3} \text{ g}^2/\text{Hz}$ at 2500 Hz.
Nonoperating (See Figure 2-2)	Random vibration with a power spectral density of 0.0005 $\text{g}^2/\text{Hz}$ from 10 to 2000 Hz.
<b>SHOCK</b>	
<b>Recommended Operating range:</b>	<0.67 g's
Operating:	2 g maximum at 11 ms, half sine waveform
Nonoperating (Storage and Transit):	10 g maximum at 11 ms, half sine waveform
<b>ALTITUDE</b>	
Operating:	maximum 3 000 m (9,840 ft)
Nonoperating:	maximum 15 000 m (49,200 ft)
<b>ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE</b>	
These disc drives have been successfully type tested under conditions of radiated and conducted interference. Operation at levels exceeding these may result in degraded performance and is not covered under warranty.	
Radiated:	14 kHz to 1 GHz, $\leq 2 \text{ V/m}$
Recommended limit:	$<0.5 \text{ V/m}$
Conducted:	30 Hz to 50 kHz, $<3 \text{ V rms}$ 50 kHz to 400 MHz, $<1 \text{ V peak-to-peak}$
<i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i>	

Table A-6. HP 7933H, HP 7935H, HP 7933XP and HP 7935XP Disc Drives Specifications (continued)

<b>Recommended limit:</b>	<0.5V rms
Electrostatic Discharge:	15 kV
<b>Recommended limit:</b>	<5 kV
Magnetic:	47.5 Hz to 198 Hz, <5 gauss

## Power line transients (per IEEE 587.1/F):

Oscillatory wave:	1.5 kV
<b>Recommended limit:</b>	<500V
Unidirectional wave:	1.0 kV
<b>Recommended limit:</b>	<500V

**POWER REQUIREMENTS**

<b>Recommended limit:</b>	The daily average not to vary more than $\pm 2\%$ from correct voltage
Voltage:	120, 208, 220, 240V; $\pm 10\%$
Frequency:	47.5 to 63 Hz
Phase:	Single
Current (nominal worst case):	

Standard/ Option	Market Area	Voltage (VAC)	Disc Drive (A)	Accessory Outlet (A)	Total
Standard	USA	208	7.6	1.7	9.3
120	USA, Canada	120	13.0	3.0	16.0
210	Canada	208	7.6	1.7	9.3
220 221 222 223	Canada Continental Europe Switzerland Denmark	220	7.4	1.6	9.0
241 242	United Kingdom Australia, New Zealand	240	6.9	1.5	8.4

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Appendix A

Table A-6. HP 7933H, HP 7935H, HP 7933XP and HP 7935XP Disc Drives Specifications (continued)

Power:	1,300 watts maximum
Distortion:	5% peak and flat harmonic distortion
Power Cords:	See figure A-2 for power cord requirements
Line Surge and Sag:	80% and 120% typical line voltage for 30 sec. 70% and 130% typical line voltage for 0.5 sec.
Neutral-to-Ground Noise:	<2V peak-to-peak
Recommended limit:	<1V peak-to-peak
Ground-to-Ground Noise:	<2V peak-to-peak
Recommended limit:	<1V peak-to-peak

**COOLING REQUIREMENTS**

Allow 50.8 cm (20 in.) in front and 76.2 cm (30 in.) behind for adequate air flow.

**SYSTEM CONFIGURATIONS\***

- Total cable length is limited to 1 metre per equivalent HP-IB load.
- This disc drive places one equivalent load on each of the HP-IB lines.

*\*Consult the appropriate system configuration guide for specific constraints in conjunction with the host CPU.*

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

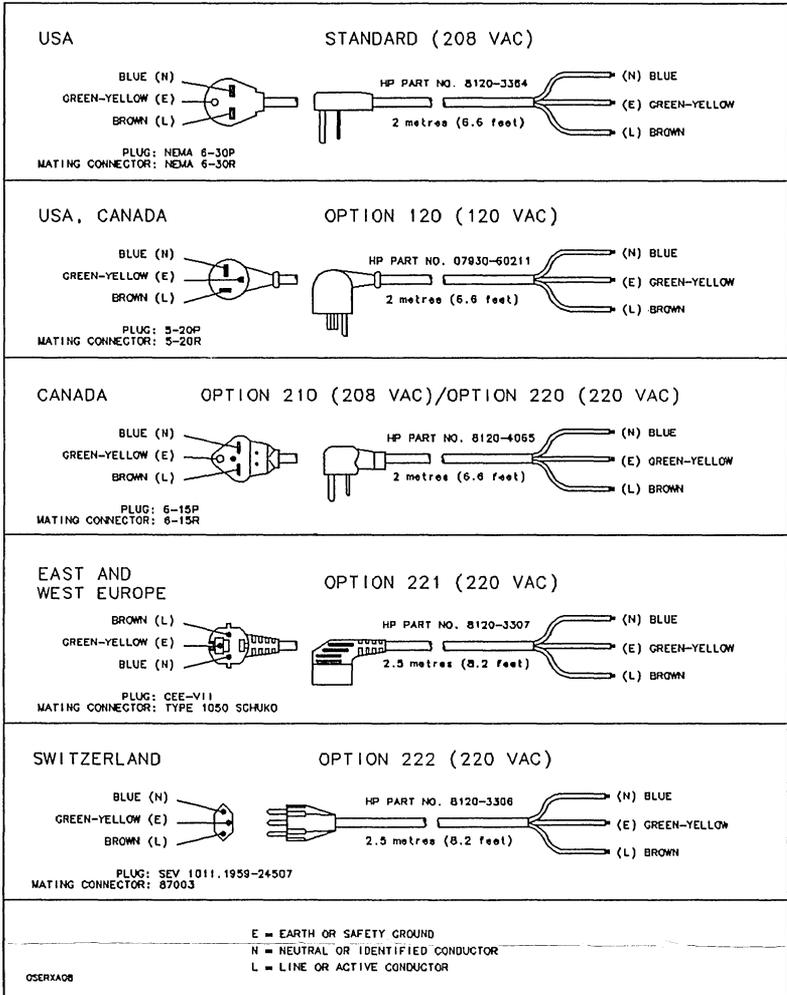


Figure A-2. HP 793X Standard and Optional Power Cords

Appendix A

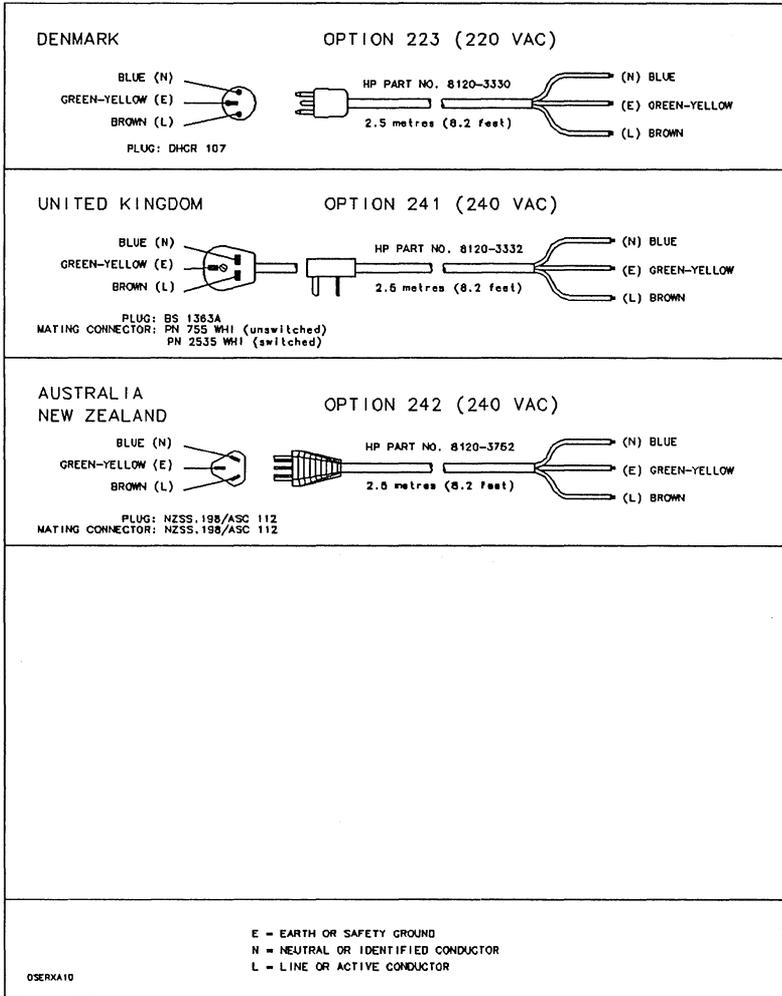


Figure A-2. HP 793X Standard and Optional Power Cords (continued)

Table A-7. HP 97935A Media Module Specifications

## ENVIRONMENTAL REQUIREMENTS

Note: The environmental specifications listed herein apply when this device is not connected to a Hewlett-Packard (HP) system. When this device is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

---

### AMBIENT TEMPERATURE

Recommended operating range:	20 °C to 25.5 °C (68 °F to 78 °F)
Operating range:	10 °C to 40 °C (50 °F to 104 °F)
Nonoperating range:	-40 °C to 65 °C (-40 °F to 149 °F)
Maximum rate of change:	20 °C (36 °F) per hour

---

### HUMIDITY

Operating:	8% to 80% relative humidity, noncondensing and wet bulb temperature not to exceed 25.6 °C (78 °F). For example, this is equivalent to a maximum of 80% relative humidity at 28 °C (82 °F), a maximum of 50% relative humidity at 34 ° (93 °F), or a maximum of 32% relative humidity at 40 °C (104 °F).
Nonoperating:	8% to 80% relative humidity, noncondensing and wet bulb temperature not to exceed 25.6 °C (78 °F). For example, this is equivalent to a maximum of 80% relative humidity at 28 °C (82 °F), a maximum of 32% relative humidity at 40 ° (140 °F) or, a maximum of 15% relative humidity at 50 °C (122 °F).

Note: The media module must not be installed if there are signs of moisture condensation in or on the media module.

---

### ALTITUDE

Operating:	maximum 3 000m (9,840 ft)
Nonoperating:	maximum 15 000m (49,213 ft)

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-7. HP 97935A Media Module Specifications

**VIBRATION**

Operating  
(See Figure  
2-1)

Random vibration with maximum power spectral density (PSD) of  $2.5 \times 10^{-5} \text{ g}^2/\text{Hz}$  from 5 to 10 Hz; 7.5 dB/octave from 10 to 25 Hz; PSD of  $2.5 \times 10^{-4} \text{ g}^2/\text{Hz}$  from 25 to 30 Hz; -24 dB/octave from 30 to 40 Hz; PSD of  $2.5 \times 10^{-5} \text{ g}^2/\text{Hz}$  from 40 to 2000 Hz; -9.3 dB/octave from 2000 to 2500 Hz; PSD of  $1.25 \times 10^{-5} \text{ g}^2/\text{Hz}$  at 2500 Hz.

Nonoperating  
(See Figure  
2-2)

Random vibration with a power spectral density of  $0.0005 \text{ g}^2/\text{Hz}$  from 10 to 2000 Hz.

**SHOCK\***

Operating:

2 g maximum at 11 ms, half sine waveform

Nonoperating:

30 g maximum at 11 ms, half sine waveform

\* The effect of excessive shock on a media module will be, in decreasing order of severity, head crash, premature failure of spindle and actuator, or error rate.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-8. HP 7941A and 7945A Disc Drives Specifications

**OPERATING SPECIFICATIONS**

Average controller overhead time:	10.1 ms
Average seek time:	30 ms
Average rotational delay:	8.3 ms
Average time to transfer 1 kbyte (at 625 kbytes/sec):	<u>2 ms</u>
Total average transaction time (excluding system overhead):	50.4 ms
Disc performance index:	20*

*\*Maximum disc transactions per second, for 1 kbyte transfers, less system overhead.*

*Refers to fundamental disc performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.*

**DATA CAPACITY (formatted)**

Item	Data Bits Per	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Byte	8				
Sector	2,048	256			
Track	65,536	8,129	32		
Head	63,438,848	7,929,856	30,976	968	
HP 7941A	190,316,544	23,789,568	92,928	2,904	3
HP 7945A	444,071,936	55,508,992	216,832	6,776	7

**PHYSICAL CHARACTERISTICS****DIMENSIONS**

Height:	130.0 mm (5.1 in.)
Width:	325 mm (12.8 in.)
Depth:	285 mm (11.2 in.)

**WEIGHT**

<b>Net (total):</b>	
Standard:	9.9 kg (21.8 lb)
<b>Shipping (total):</b>	
Standard:	12.9 kg (28.5 lb)

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-8. HP 7941A and HP 7945A Disc Drives Specifications (cont.)

## OPERATING CHARACTERISTICS

### HEAT DISSIPATION

Maximum: 85 Watts (290 Btu/hr; 73 Kcals/hr)  
 Typical: 65 Watts (222 Btu/hr; 56 Kcals/hr)

### ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- HP 7941A/7945A -- For U.S.A., designed to meet FCC docket 20780 for Class B computing peripheral devices.
- HP 7941A/7945A -- for Europe, designed to meet VDE 0871 for Level B computing devices. FTZ licensed on some HP systems. Refer to your local sales representative for more information.

Magnetic nonoperating: <2 milligauss at 2m (7 ft) on all surfaces  
 Magnetic operating: <5 gauss on all surfaces

### POWER CHARACTERISTICS

Voltages (true RMS):

115V Setting; 100V, 115V, 120V, single phase (inclusive tolerance range is 90V to 132V)  
 230V setting; 220V, 240V, single phase (inclusive tolerance range is 180V to 264V)

Frequency: 47.5-66 Hz

Maximum Power: 115V setting; 85 Watts (90V, 60Hz)  
 230V setting; 85 Watts (198V, 50Hz)

Typical Power: 115 setting; 65 Watts (115V, 60Hz)  
 230V setting; 65 Watts (230V, 50Hz)

Maximum Current (occurs during spin-up): 115V setting; 1.6A (true RMS at 90V, 60Hz)  
 230V setting; 1.0A (true RMS at 180V, 50Hz)

Typical Current: 115V setting; 0.80A (true RMS at 115V, 60Hz)  
 230V setting; 0.50A (true RMS at 230V, 50Hz)

Line Dropout: No effect on performance; no operator intervention required for dropout equal to or less than one cycle of the ac line frequency (20.0 ms, 50 Hz; 16.7 ms, 60 Hz).

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-8. HP 7941A and HP 7945A Disc Drives Specifications (cont.)

<b>ACOUSTIC EMISSIONS</b>	
Average sound pressure level ( $\overline{L}_{pA}$ ):	41 dB(A)
Sound power level ( $L_{wA}$ ):	53 dB(A)
<b>SAFETY</b>	
<ul style="list-style-type: none"> <li>• CSA certified to CSA 22.2 No. 154.</li> <li>• Meets all applicable safety standards of IEC 380 and IEC 435.</li> <li>• UL listed to UL 114 and UL 478.</li> </ul>	
<b>ENVIRONMENTAL REQUIREMENTS</b>	
<p>Note: The environmental specifications listed herein apply when this subsystem is not connected to a Hewlett-Packard (HP) system. When this subsystem is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.</p> <p>The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.</p>	
<b>TEMPERATURE</b>	
Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	5°C to 45°C (41°F to 113°F)
Nonoperating range:	-40°C to 60°C (-40°F to 140°F)
Maximum rate of change:	10°C (18°F) per hour
<b>HUMIDITY</b>	
Operating:	8% to 80% relative humidity, noncondensing, and wet bulb temperature not to exceed 29°C (84°F). For example, this is equivalent to maximum of 80% relative humidity at 32°C (90°F), a maximum of 65% relative humidity at 35°C (95°F), or a maximum of 46% relative humidity at 40°C (104°F).
Nonoperating:	5% to 90% relative humidity, noncondensing and wet bulb temperature not to exceed 29°C (84°F). For example, this is equivalent to a maximum of 95% relative humidity at 30°C (86°F), a maximum of 50% relative humidity at 38°C (100°F), a maximum of 32% relative humidity at 45°C (113°F), or a maximum of 10% relative humidity at 60°C (140°F).
<p><i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i></p>	

Table A-8. HP 7941A and HP 7945A Disc Drives Specifications (cont.)

<b>VIBRATION</b>	
Operating (See Figure 2-3)	Random vibration with power spectral density (PSD) of $0.0001 \text{ g}^2/\text{Hz}$ from 5 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of $0.00005 \text{ g}^2/\text{Hz}$ at 500 Hz.
Nonoperating (See Figure 2-4)	Random vibration with power spectral density (PSD) of $0.015 \text{ g}^2/\text{Hz}$ from 5 to 100 Hz; -6 dB/octave from 100 to 137 Hz; PSD of $0.008 \text{ g}^2/\text{Hz}$ from 137 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of $0.0039 \text{ g}^2/\text{Hz}$ at 500 Hz.
<b>SHOCK</b>	
<b>Recommended operating range:</b>	<0.5 g's
Operating:	1.5 g maximum at 11 ms, half sine waveform
Nonoperating:	20 g maximum at 11 ms, half sine waveform
<b>ALTITUDE</b>	
Operating:	maximum 4 600m (15, 000 ft)
Nonoperating:	maximum 15 000m (49,200 ft)
<b>ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE</b>	
Radiated:	14 kHz to 1 GHz, up to 3 V/m
<b>Recommended limit:</b>	<0.5 V/m
Conducted:	30 Hz to 50 kHz, <3 V rms
	50 kHz to 400 MHz, <1V peak-to-peak
<b>Recommended limit:</b>	<0.5 rms
Electrostatic Discharge:	<15.0 kV
<b>Recommended limit:</b>	<5 kV
Magnetic:	<1 gauss, 47.5 to 198 Hz
Power line transients (per IEEE Standard P587.1/F)	
Oscillatory wave (100 kHz ringing wave):	<1.5 kV and <50 A (open circuit voltage)
<b>Recommended limit:</b>	<500V
Unidirectional wave (one 20 us wide pulse):	<1.0 kV and <100 A (open circuit voltage)
<b>Recommended limit:</b>	<500V
<i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i>	

Table A-8. HP 7941A and HP 7945A Disc Drives Specifications (cont.)

**POWER REQUIREMENTS**

## Voltages (true RMS):

115V Setting;	100V, 115V, 120V, single phase (inclusive tolerance range is 90V to 132V)
230V setting;	220V, 240V, single phase (inclusive tolerance range is 180V to 264V)

Frequency:	47.5-66 Hz
------------	------------

Maximum Power:	115V setting; 144 V-A (90V, 60Hz)
	230V setting; 198 V-A (198V, 50Hz)

Typical Power:	115 setting; 92 V-A (115V, 60Hz)
	230V setting; 115 V-A (230V, 50Hz)

Maximum Current (occurs during spin-up):	115V setting; 1.6A (true RMS at 90V, 60Hz)
	230V setting; 1.0A (true RMS at 180V, 50Hz)

Typical Current:	115V setting; 0.80A (true RMS at 115V, 60Hz)
	230V setting; 0.50A (true RMS at 230V, 50Hz)

Distortion:	<5% peak and flat harmonic distortion
-------------	---------------------------------------

Line Surge and Sag:	80% and 120% typical line voltage for 30 sec.
	70% and 130% typical line voltage for 0.5 sec.

**TILT**

The drive shall meet all performance specifications when mounted in an upright orientation which maintains the horizontal plane of the device to within +/- 15 degrees of parallel to the horizon.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Appendix A

Table A-8. HP 7941A and HP 7945A Disc Drives Specifications (cont.)

	<u>115V Setting</u>	<u>230V Setting</u>	<u>Phase</u>	<u>Frequency</u>
Operating Voltage (true RMS):	90-132V	180-254V	Single	47.5-66 Hz
Maximum Operating Current (true RMS):	1.6A at 90V	1.0A at 180V	Single	60 Hz
Typical Operating Current (true RMS):	1.15A at 115V	0.70A at 230V	Single	60 Hz
Maximum Operating Power (Volt/Amps):	144VA at 90V	180VA at 180V	Single	60 Hz
Typical Operating Power (Volt/Amps):	132VA at 115V	161VA at 230V	Single	60 Hz
Maximum Operating Power (Heat):	85W at 90V	85W at 180V	Single	60 Hz
Typical Operating Power (Heat):	65W at 115V	65W at 230V	Single	60 Hz

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-9. HP 7942A and 7946A Disc/Tape Drives Specifications

**OPERATING SPECIFICATIONS****DISC DRIVE**

Average controller overhead time:	10.1 ms
Average seek time:	30 ms
Average rotational delay:	8.3 ms
Average time to transfer 1 kbyte (at 625 kbytes/sec):	<u>2 ms</u>
Total average transaction time (excluding system overhead):	50.4 ms

Disc performance index: 20\*

*\*Maximum disc transactions per second, for 1 kbyte transfers, less system overhead.*

*Refers to fundamental disc performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.*

**TAPE DRIVE**

Tape Speed Read/Write: 60 IPS  
Search/Rewind: 90 IPS

Maximum sustained Transfer rate: 34 kbytes/second \*

*\* Maximum sustained transfer rate does not necessarily reflect system throughput, which varies depending upon application, file structures, and driver implementation.*

**DISC DRIVE DATA CAPACITY (formatted)**

Item	Data Bits Per	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Byte	8				
Sector	2,048	256			
Track	65,536	8,129	32		
Head	63,438,848	7,929,856	30,976	968	
HP 7942A	190,316,544	23,789,568	92,928	2,904	3
HP 7946A	444,071,936	55,508,992	216,832	6,776	7

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-9. HP 7942A and 7946A Disc/Tape Drives Specifications

**TAPE DRIVE DATA CAPACITY (formatted)**

Item	Data Bits Per	Data Bytes Per	Words Per	Blocks Per	Tracks Per
Byte	8				
Word	16	2			
Block	8,192	1,024	512		
Track					
150ft.	8,372,224	1,046,578	523,264	1,022	
600ft.	33,488,896	4,186,112	2,093,056	4,088	
Cartridge					
150 ft.	133,955,584	16,744,448	8,372,224	16,352	16
600 ft.	535,822,336	66,977,792	33,488,896	65,408	16

**PHYSICAL CHARACTERISTICS****DIMENSIONS**

Height:	208.0 mm (8.19 in.)
Width:	325 mm (12.79 in.)
Depth:	285 mm (11.22 in.)

**WEIGHT**

<b>Net (total):</b>	
Standard:	15.8 kg (34.8 lb)
<b>Shipping (total):</b>	
Standard:	19.6 kg (43.3 lb)

**OPERATING CHARACTERISTICS****HEAT DISSIPATION**

Maximum:	125 Watts (427 Btu/hr; 109 Kcals/hr)
Typical:	120 Watts (410 Btu/hr; 103 Kcals/hr)

**ELECTROMAGNETIC EMISSIONS**

Radiated and conducted interference:

- HP 7942A/7946A -- For U.S.A., designed to meet FCC docket 20780 for Class B computing peripheral devices.
- HP 7942A/7946A -- for Europe, designed to meet VDE 0871 for Level B computing devices. FTZ licensed on some HP

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

Table A-9. HP 7942A and HP 7946A Disc Drives Specifications (cont.)

	systems. Refer to your local sales representative for more information.
Magnetic nonoperating:	<2 milligauss at 2m (7 ft) on all surfaces
Magnetic operating:	<5 gauss on all surfaces
<b>POWER CHARACTERISTICS</b>	
Voltages (true rms):	
115V Setting;	100V, 115V, 120V, single phase (inclusive tolerance range is 90V to 132V)
230V setting;	220V, 240V, single phase (inclusive tolerance range is 180V to 264V)
Frequency:	47.5-66 Hz
Maximum Power:	115V setting; 125 Watts (100V, 60 Hz) 230V setting; 125 Watts (264V, 50 Hz)
Typical Power:	115 setting; 120 Watts (115V, 60 Hz) 230V setting; 120 Watts (230V, 50 Hz)
Maximum Rated Current (occurs during spin-up):	115V setting; 2.3A (true rms at 90V, 60 Hz) 230V setting; 1.3A (true rms at 180V, 50 Hz)
Typical Current:	115V setting; 1.50A (true rms at 115V, 60 Hz) 230V setting; 0.80A (true rms at 230V, 50 Hz)
Line Dropout:	No effect on performance; no operator intervention required for dropout equal to or less than one cycle of the ac line frequency (20.0 ms, 50 Hz; 16.7 ms, 60 Hz).
<b>ACOUSTIC EMISSIONS</b>	
Average sound pressure level ( $\overline{L}_{pA}$ ):	40 dB(A)
Sound power level ( $L_{WA}$ ):	52 dB(A)
<b>SAFETY</b>	
<ul style="list-style-type: none"> <li>• CSA certified to CSA 22.2 No. 154.</li> <li>• Meets all applicable safety standards of IEC 380 and IEC 435.</li> <li>• UL listed to UL 114 and UL 478.</li> </ul>	
<p><i>Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.</i></p>	

Table A-9. HP 7942A and HP 7946A Disc Drives Specifications (cont.)

## ENVIRONMENTAL REQUIREMENTS

Note: The environmental specifications listed herein apply when this device is not connected to a Hewlett-Packard (HP) system. When this device is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

---

### TEMPERATURE

Recommended operating range:	20 °C to 25.5 °C (68 °F to 78 °F)
Operating range:	5 °C to 40 °C (41 °F to 104 °F)
Nonoperating range:	-40 °C to 60 °C (-40 °F to 140 °F)

Maximum rate of change:	10 °C (18 °F) per hour
-------------------------	------------------------

---

### HUMIDITY

Operating:	20% to 80% relative humidity, noncondensing, and wet bulb temperature not to exceed 29 °C (84 °F). For example, this is equivalent to maximum of 80% relative humidity at 32 °C (90 °F), a maximum of 65% relative humidity at 35 °C (95 °F), or a maximum of 46% relative humidity at 40 °C (104 °F).
------------	--

Nonoperating:	5% to 95% relative humidity, noncondensing and wet bulb temperature not to exceed 29 °C (84 °F). For example, this is equivalent to a maximum of 95% relative humidity at 30 °C (86 °F), a maximum of 50% relative humidity at 38 °C (100 °F), a maximum of 32% relative humidity at 45 °C (113 °F), or a maximum of 10% relative humidity at 60 °C (140 °F).
---------------	---

---

### VIBRATION

Figure 2-1  
Operating  
(See Figure  
2-1)

Random vibration with power spectral density (PSD) of  $2.5 \times 10^{-5} \text{ g}^2/\text{Hz}$  from 5 to 10 Hz; 7.5 dB/octave from 10 to 25 Hz; PSD of  $2.5 \times 10^{-4} \text{ g}^2/\text{Hz}$  from 25 to 30 Hz; -24 dB/octave from 30 to 40 Hz; PSD of  $2.5 \times 10^{-5} \text{ g}^2/\text{Hz}$  from 40 to 2000 Hz; -9.3 dB/octave from 2000 to 2500 Hz; PSD of  $1.25 \times 10^{-5} \text{ g}^2/\text{Hz}$  at 2500 Hz.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*



Table A-9. HP 7942A and HP 7946A Disc Drives Specifications (cont.)

**POWER REQUIREMENTS**

Voltages (true rms):

115V Setting; 100V, 115V, 120V, single phase (inclusive tolerance range is 90V to 132V)  
 230V setting; 220V, 240V, single phase (inclusive tolerance range is 180V to 264V)

Frequency: 47.5-66 Hz

Maximum Power: 115V setting; 207 V-A (90V, 60 Hz)  
 230V setting; 234 V-A (180V, 50 Hz)

Typical Power: 115 setting; 173 V-A (115V, 60 Hz)  
 230V setting; 184 V-A (230V, 50 Hz)

Maximum Current (occurs during spin-up): 115V setting; 2.3A (true rms at 90V, 60 Hz)  
 230V setting; 1.3A (true rms at 180V, 50 Hz)

Typical Current: 115V setting; 1.50A (true rms at 115V, 60 Hz)  
 230V setting; 0.80A (true rms at 230V, 50 Hz)

Distortion: <5% peak and flat harmonic distortion

Line Surge and Sag: 80% and 120% typical line voltage for 30 sec.  
 70% and 130% typical line voltage for 0.5 sec.

---

**TILT**

The drive shall meet all performance specifications when mounted in an upright orientation which maintains the horizontal plane of the device to within +/- 15 degrees of parallel to the horizon.

*Hewlett-Packard, in a continuing effort to offer excellent products at a fair value, reserves the right to change specifications, designs, and models without notice.*

**APPENDIX B**  
**HEWLETT-PACKARD**  
**DISC/TAPE DRIVE**  
**AVERAGE CURRENT USEAGE**



Appendix B

Table B-1. Average Current Usage By Product Type

PRODUCT TYPE	100 VOLTS		120 VOLTS		208 VOLTS		220 VOLTS		240 VOLTS	
	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
7906	9.4A	8.7A	8.1A	7.5A	4.3A	4.3A	4.5A	4.2A	2.5A	3.9A
791X	4.8A	4.9A	4.3A	4.2A			2.3A	2.3A	2.0A	2.1A
7920	7.7A	8.6A	6.6A	7.5A	3.3A	3.2A	3.7A	4.3A	3.4A	4.0A
7925	8.4A	7.8A	7.2A	6.6A			3.9A	3.8A	3.6A	3.5A
793X			11.0A	11.2A	6.0A	6.3A	5.8A	6.0A	5.4A	5.6A
794X	115VOLTS .87A .87A						230VOLTS .48A .49A			



**APPENDIX C**  
**HEWLETT-PACKARD**  
**DISC/TAPE DRIVE**  
**REFERENCE INFORMATION**



Table C-1. Reference Information\*

	Temperature	Humidity	Tilt	Shock	Vibration	AC Power	EMI	ESD
HP 7906 Spec.	10-40 C	8-80%	+/- 20 deg.	N/S	N/S	+5 -10%	<0.5 V/m	<12.5 kV
Recomm.	20-25.5 C	N/S	N/S	<0.5g	Note 10	Note 8	<0.1 V/m	<500V
HP 7906D Spec.	10-40 C	8-80%	+/- 20 deg.	N/S	N/S	+5 -10%	<0.5 V/m	<12.5 kV
Recomm.	20-25.5 C	N/S	N/S	<0.5g	Note 10	Note 8	<0.1 V/m	<500V
HP 7920A Spec.	10-40 C	8-80%	N/S	N/S	N/S	+5 -10%	N/S	N/S
Recomm.	20-25.5 C	N/S	N/S	<0.5g	Note 10	Note 8	<0.1 V/m	<500V
HP 7920D Spec.	10-40 C	8-80%	N/S	N/S	N/S	+5 -10%	N/S	N/S
Recomm.	20-25.5 C	N/S	N/S	<0.5g	Note 10	Note 8	<0.1 V/m	<500V

\*Notes-

1. Spec.-denotes specification
2. Recomm.-denotes recommended limit
3. N/S-denotes not specified
4. 10-40 C = 50-104 F

5. 20-25.5 C = 68-78 F
6. 10-40 C = 32-113 F
7. Humidity-noncondensing
8. AC Power-the daily average not

9. EMI-denotes radiated susceptibility
10. PSD of 4 X 10<sup>(-6)</sup> g(2)/Hz from  
5 - 2500 Hz

Table C-1. Reference Information (cont'd)\*

	Temperature	Humidity	Tilt	Shock	Vibration	AC Power	EMI	ESD
HP 7925A Spec.	10-40 C	8-80%	N/S	N/S	N/S	+5 -10%	N/S	N/S
Recomm.	20-25.5 C	N/S	N/S	<0.5g	Note 10	Note 8	<0.1 V/m	<500V
HP 7925D Spec.	10-40 C	8-80%	N/S	N/S	N/S	+5 -10%	N/S	N/S
Recomm.	20-25.5 C	N/S	N/S	<0.5g	Note 10	Note 8	<0.1 V/m	<500V
HP 7908 Spec.	10-40 C	20-80%	<30 deg.	1g	<0.1g rms	N/S	<1 V/m	<12.5 kV
Recomm.	20-25.5 C	N/S	N/S	<0.67g	<0.05 rms	N/S	<0.2 V/m	<500V
HP 7910 Spec.	0-45 C	8-80%	N/S	N/S	N/S	+5 -10%	N/S	N/S
Recomm.	20-25.5 C	N/S	N/S	<0.5g	N/S	N/S	<0.1 V/m	<500V

## \*Notes-

1. Spec.-denotes specification
2. Recomm.-denotes recommended limit
3. N/S-denotes not specified
4. 10-40 C = 50-104 F

5. 20-25.5 C = 68-78 F
6. 10-40 C = 32-113 F
7. Humidity-noncondensing
8. AC Power-the daily average not

9. EMI-denotes radiated susceptibility
10. PSD of 4 X 10(-6) g(2)/Hz from  
5 - 2500 Hz

# SALES & SUPPORT OFFICES

Arranged alphabetically by country



## Product Line Sales/Support Key

### Key Product Line

- A** Analytical
- CM** Components
- C** Computer Systems
- E** Electronic Instruments & Measurement Systems
- M** Medical Products
- P** Personal Computation Products
- \* Sales only for specific product line
- \*\* Support only for specific product line

**IMPORTANT:** These symbols designate general product line capability. They do not insure sales or support availability for all products within a line, at all locations. Contact your local sales office for information regarding locations where HP support is available for specific products.

## HEADQUARTERS OFFICES

If there is no sales office listed for your area, contact one of these headquarters offices.

### NORTH-CENTRAL AFRICA

Hewlett-Packard S.A.  
7, rue du Bois-de-Lan  
CH-1217 MEYVIE 1, Switzerland  
Tel: (022) 83 12 12  
Telex: 27835 Irnea  
Cable: HEWPACKSA Geneva

### ASIA

Hewlett-Packard Asia Ltd  
47/F, 26 Harbour Rd.,  
Wancha, HONG KONG  
P.O. Box 653, Hong Kong  
Tel: 5-833033  
Telex: 76793 HPA HX  
Cable: HPASIALA TD

### CANADA

Hewlett-Packard (Canada) Ltd  
6877 Goreway Drive  
MISSISSAUGA, Ontario L4V 1M6  
Tel: (416) 619-9430  
Telex: 610-492-4246

### EASTERN EUROPE

Hewlett-Packard Ges.m.b.H.  
Liebigasse 1  
P.O. Box 72  
A-1222 VIENNA, Austria  
Tel: (0222) 2500-0  
Tel: (410) 237771  
Telex: 1 3 4425 HEPA A

### NORTHERN EUROPE

Hewlett-Packard S.A.  
Ulensteede 475  
P.O. Box 999  
NL-1183 AG AMSTELVEEN  
The Netherlands  
Tel: 20-437771  
Telex: 18 919 hpnr nl

### SOUTH EAST EUROPE

Hewlett-Packard S.A.  
World Trade Center  
110 Avenue Louis Casali  
1215 Cointe, GENEVA, Switzerland  
Tel: (022) 98 96 51  
Telex: 27225 hspz

### MEDITERRANEAN AND MIDDLE EAST

Hewlett-Packard S.A.  
Mediterranean and Middle East  
Operations  
Atina Centre  
32 Kilissias Ave.  
Paradissos-Amaroussion, ATHENS  
Greece  
Tel: 682 88 11  
Telex: 21-6588 HPAT GR  
Cable: HEWPACKSA Athens

### UNITED KINGDOM

Hewlett-Packard Ltd.  
Nine Mile Ride  
Easimampstead, WOKINGHAM  
Berkshire, RG91 2LL  
Tel: 0344 713 100  
Telex: 848905

### EASTERN USA

Hewlett-Packard Co.  
4 Chuckery Road  
ROCKVILLE, MD 20850  
Tel: (301) 258-2000

### MIDWESTERN USA

Hewlett-Packard Co.  
5291 Tolview Drive  
ROLLING MEADOWS, IL 60008  
Tel: (312) 255-9900

### SOUTHERN USA

Hewlett-Packard Co.  
2000 South Park Place  
P.O. Box 105025  
ATLANTA, GA 30348  
Tel: (404) 955-1500

### WESTERN USA

Hewlett-Packard Co.  
3939 Lankershim Blvd.,  
P.O. Box 3919  
LOS ANGELES, CA 91604  
Tel: (213) 506-3700

### OTHER INTERNATIONAL AREAS

Hewlett-Packard Co.  
Intercontinental Headquarters  
3455 Deer Creek Road  
PALO ALTO, CA 94304  
Tel: (415) 857-1501  
Telex: 034-8330  
Cable: HEWPACK

### ANGOLA

Telectra Angola LDA  
Empresa Técnica de Equipamentos  
Rua Conselheiro Julio de Vilhena, 16  
Cana Postal 6487  
LUANDA  
Tel: 35515,35516  
Telex: 3134  
E.C.\*

### ARGENTINA

Hewlett-Packard Argentina S.A.  
Montañas 2140/50  
1428 BUENOS AIRES  
Tel: 783-4686/4836/4730  
Cable: HEWPACKARG  
A.C.C.M.E.P.  
Biotron S.A.C.I.e.I.  
Av. Paso Colon 221, Piso 9  
1299 BUENOS AIRES  
CM

### LABORATORIO RODRIGUEZ

Corswant S.R.L.  
Misiones, 1155 - 1876  
Bernal, Oeste

### BUENOS AIRES

Tel: 252-3958, 252-4991  
A  
Argentina Eancco S.R.L.  
Avisozo 2328  
1415 BUENOS AIRES  
Tel: 541-58-1961, 541-59-2767  
A

### AUSTRALIA

#### Adelaide, South Australia Office

Hewlett-Packard Australia Ltd.  
153 Greenhill Road  
PARKSIDE, S.A. 5063  
Tel: 272-5911  
Telex: 62536  
Cable: HEWPARD Adelaide  
A\*,C.C.M.E.P.

#### Brisbane, Queensland Office

Hewlett-Packard Australia Ltd.  
10 Payne Road  
THE GAP, Queensland 4061  
Tel: 30-4133  
Telex: 42133  
Cable: HEWPARD Brisbane  
A.C.C.M.E.P.

### Canberra, Australia Capital Territory Office

Hewlett-Packard Australia Ltd.  
121 Wollongong Street  
Fyshwick, A.C.T. 2609  
Tel: 80 4244  
Telex: 62550  
Cable: HEWPARD Canberra  
C.C.M.E.P.

### Melbourne, Victoria Office

Hewlett-Packard Australia Ltd.  
31-41 Joseph Street  
BLACKBURN, Victoria 3130  
Tel: 855-2695  
Telex: 31-024  
Cable: HEWPARD Melbourne  
A.C.C.M.E.P.

### Perth, Western Australia Office

Hewlett-Packard Australia Ltd.  
261 Sling Highway  
CLAREMONT, W.A. 6010  
Tel: 383-2188  
Telex: 93869  
Cable: HEWPARD Perth  
A.C.C.M.E.P.

### Sydney, New South Wales Office

Hewlett-Packard Australia Ltd.  
17-23 Talavera Road  
P.O. Box 308  
NORTH RYDE, N.S.W. 2113  
Tel: 659-4444  
Telex: 21561  
Cable: HEWPARD Sydney  
A.C.C.M.E.P.

### AUSTRIA

Hewlett-Packard Ges.m.b.H.  
Verkaufsbüro Graz  
Grottenhofstrasse 94  
A-6052 GRAZ  
Tel: (0316) 291 56 60  
Telex: 32375  
C.E.

### Hewlett-Packard Ges.m.b.H.

Liebigasse 1  
P.O. Box 72  
A-1222 VIENNA  
Tel: (0222) 2500-0  
Telex: 134425 HEPA A  
A.C.C.M.E.P.

### BAHRAIN

Green Salon  
P.O. Box 557  
MANAMA  
Tel: 255309,255950  
Telex: 8441  
P

### Wael Pharmacy

P.O. Box 648  
MANAMA  
Tel: 250123  
Telex: 8550 WAEI BN  
E.M.

### Zayani Computer Systems

218 Shak Mubarak Building  
Government Avenue  
P.O. Box 5918  
MANAMA  
Tel: 275278  
Telex: 9015  
P

### BELGIUM

Hewlett-Packard Belgium S.A./N.V.  
Bldv de la Woluwe, 100  
Woluwekdal  
B-1200 BRUSSELS  
Tel: (02) 782-3243  
Telex: 23-494 paloben bru  
A.C.C.M.E.P.

### BERMUDA

Applied Computer Technologies  
Atlantic House Building  
Par-La-Vie Road  
Hamilton 5  
Tel: 295-1616  
P

### BRAZIL

Hewlett-Packard do Brasil  
L.e.C. Ltda.  
Alameda Rio Negro, 750  
Alphaville  
06400 BARUERI SP  
Tel: (011) 421 1311  
Telex: (011) 33872 HPBR-BR  
Cable: HEWPACK Sao Paulo  
A.C.C.M.E.P.

### Hewlett-Packard do Brasil

L.e.C. Ltda.  
Praia de Botafogo 228  
6º Andar-conj 614  
Rua Jose Bonifacio  
22250 RIO DE JANEIRO  
Tel: (021) 552-6422  
Telex: 21905 HPBR-BR  
Cable: HEWPACK Rio de Janeiro  
A.C.C.M.E.P.

### Corvex/Van Den

Rua Jose Bonifacio  
458 Todas Os Santos  
CEP 20771

### RIO DE JANEIRO, RJ

Tel: 591-0197  
Telex: 33467 EGLB BR  
A  
ANAMED I.C.E.I. Ltda.  
Rua Baga, 103  
04912 SAO PAULO, SP  
Tel: (011) 572-6537  
Telex: 24270 HPBR-BR  
M

### Datarom's Electronica Ltda.

Av. Pacemabu 746-C11  
SAO PAULO, SP  
Tel: (11) 260111  
CM

### CAMEROON

Bericac  
B.P. 23  
DOUALA  
Tel: 420153  
Telex: 5351  
C.P.

### CANADA

#### Alberta

Hewlett-Packard (Canada) Ltd.  
3030 3rd Avenue N.E.  
CALGARY, Alberta T2A 6T7  
Tel: (403) 235-3100  
A.C.C.M.E.P.

#### Hewlett-Packard (Canada) Ltd.

11125-176th Street  
EDMONTON, Alberta T5S 1P2  
Tel: (403) 466-6666  
A.C.C.M.E.P.



## SALES & SUPPORT OFFICES

Arranged alphabetically by country

### CANADA (Cont'd)

**British Columbia**  
Hewlett-Packard (Canada) Ltd.  
10691 Shellbridge Way

**RICHMOND,**  
British Columbia V6X 2W7  
Tel: (604) 270-2277  
Telex: 610-922-5059  
A.C.C.M.E.M.P.\*

Hewlett-Packard (Canada) Ltd.  
121 - 3350 Douglas Street  
**VICTORIA,** British Columbia V8Z 3L1  
Tel: (604) 381-6616  
C

### Manitoba

Hewlett-Packard (Canada) Ltd.  
1825 Inkster Blvd.  
**WINNIPEG,** Manitoba R2K 1R3  
Tel: (204) 694-2777  
A.C.C.M.E.M.P.\*

### New Brunswick

Hewlett-Packard (Canada) Ltd.  
814 Main Street  
**MONCTON,** New Brunswick E1C 1E6  
Tel: (506) 855-2841  
C

### Nova Scotia

Hewlett-Packard (Canada) Ltd.  
Suite 111  
500 Windmill Road  
**DARTMOUTH,** Nova Scotia B3B 1P7  
Tel: (902) 469-7820  
C.C.M.E.M.P.\*

### Ontario

Hewlett-Packard (Canada) Ltd.  
3325 N. Service Rd., Unit 3  
**BURLINGTON,** Ontario L7N 3G2  
Tel: (416) 335-8644  
C/M\*

Hewlett-Packard (Canada) Ltd.  
496 Days Road  
**KINGSTON,** Ontario K7M 5R4  
Tel: (613) 384-2088  
C

Hewlett-Packard (Canada) Ltd.  
552 Newbold Street  
**LONDON,** Ontario N5E 2S5  
Tel: (519) 686-9181  
A.C.C.M.E.M.P.\*

Hewlett-Packard (Canada) Ltd.  
6877 Goreway Drive  
**MISSISSAUGA,** Ontario L4V 1M6  
Tel: (416) 679-9430  
A.C.C.M.E.M.P.\*

Hewlett-Packard (Canada) Ltd.  
2670 Queensview Dr.  
**OTTAWA,** Ontario K2B 6K1  
Tel: (613) 820-5483  
A.C.C.M.E.M.P.\*

Hewlett-Packard (Canada) Ltd.  
The Oaks Plaza, Unit #9  
2140 Regent Street  
**BUDURRY,** Ontario, P3E 5S8  
Tel: (705) 522-0202  
C

Hewlett-Packard (Canada) Ltd.  
3790 Victoria Park Ave.  
**WILLOWDALE,** Ontario M2H 3H7  
Tel: (416) 499-2550  
C

### Quebec

Hewlett-Packard (Canada) Ltd.  
17500 Trans Canada Highway  
South Service Road  
**KIRKLAND,** Quebec H3J 2X8  
Tel: (514) 697-4232  
A.C.C.M.E.M.P.\*

Hewlett-Packard (Canada) Ltd.  
1150 rue Claire Fontaine  
**QUEBEC CITY,** Quebec G1R 5G4  
Tel: (418) 648-0726  
C

Hewlett-Packard (Canada) Ltd.  
130 Ronson Crescent  
**SASKATON,** Saskatchewan S7L 6M7  
Tel: (306) 242-3702  
C

### CHILE

ASC Ltda.  
Austra 2041  
**SANTIAGO**  
Tel: 223-5346; 223-6148  
Tel: 340192 ASC CK  
C.P

Iscal Ltda.  
Av. Itala 634 Santiago  
Casilla 16475  
**SANTIAGO**  
Tel: 229-4222  
Tel: 440283 JCYCL CZ  
C.M.E.M

Metrotab S.A.  
Monjías 454 of. 206  
**SANTIAGO**  
Tel: 355732; 398296  
Tel: 340866 METLAB CK  
A

Olympic (Chile) Ltda.  
Av. Rodrygo de Araya 1045  
Casilla 255-V  
**SANTIAGO** 21  
Tel: 225-5044  
Tel: 340892 OLYMP  
Cable: Olympachile Santiagochile  
C.P

### CHINA, People's

**Republic of**  
China Hewlett-Packard Ltd.  
47/F China Resources Bldg.  
26 Harbour Road  
**HONG KONG**  
Tel: 8-333933  
Tel: 76793 HPA HK  
Cable: HP ASIA LTD  
A/M\*

China Hewlett-Packard Ltd.  
P.O. Box 9610, Beijing  
4th Floor, 2nd Watch Factory Main  
Bldg.  
Shuang Yu Shu, Bei San Huan Rd  
Hai Dan District  
**BEIJING**  
Tel: 29-6567  
Tel: 22601 CTSHP CN  
Cable: 1920 Beijing  
A.C.C.M.E.M.P.\*

### COLOMBIA

Instrumentación  
H. A. Langebaek & Kier S.A.  
Carrera 4A No. 52A-26  
**KIRKLAND,** Quebec H3J 2X8  
Tel: (514) 697-4232  
A.C.C.M.E.M.P.\*

Hewlett-Packard (Canada) Ltd.  
130 Ronson Crescent  
**SASKATON,** Saskatchewan S7L 6M7  
Tel: (306) 242-3702  
C

Compumundo  
Avenida 15 # 107-80  
**BOGOTÁ D.E.**  
Tel: 214-4458  
Tel: 45466 MARICO  
P

Carvajal, S.A.  
Calle 29 Norte No. 6A-40  
Apartado Aereo 46  
**CALI**  
Tel: 358-1111  
Tel: 55650  
C.C.P.

### CONGO

Serie-Congo  
B. P. 2105  
**BRUXZAVILLE**  
Tel: 810504  
Tel: 5262

### COSTA RICA

Clintifica Costarricense S.A.  
Avenida 2, Calle 5  
San Pedro de Montes de Oca  
Apartado 10159  
**SAN JOSÉ**  
Tel: 24-38-20, 24-08-19  
Tel: 2367 GALGUR CR  
C.M.E.M

### CYPRUS

Telexera Ltd.  
P.O. Box 4809  
140 Sissinos Avenue  
**NICOSIA**  
Tel: 62698  
Tel: 2894 LEVIDO CY  
E.M.P.

### DENMARK

Hewlett-Packard A/S  
Dattavej 52  
DK-3460 BIRKERØD  
**COPENHAGEN**  
Tel: (02) 81-66-40  
Tel: 37409 hpas dk  
A.C.C.M.E.M.P.\*

### DOMINICAN REPUBLIC

Microprog S.A.  
Juan Tomás Mejía y Cotes No. 60  
Aroyo Honda  
**SANTO DOMINGO**  
Tel: 565-6268  
Tel: 4510 ARENTA DR (RCA)  
P

### ECUADOR

CYEDE Cia. Ltda.  
Avenida Eloy Alfaro 1749  
y Belgica  
Carrera 4A No. 52A-26  
**BOGOTÁ** 1, D.E.  
Tel: 212-1466  
Tel: 44400 INST CO  
Cable: AAFIS Bogota  
C.M.E.M

Nefromedicas Ltda.  
Calle 123 No. 9B-31  
Apartado Aereo 100-958  
**BOGOTÁ D.E.**, 10  
Tel: 213-5267, 213-1615  
Tel: 43415 HEGAS CO  
A

Compumundo  
Avenida 15 # 107-80  
**BOGOTÁ D.E.**  
Tel: 214-4458  
Tel: 45466 MARICO  
P

Equador Overseas Agencies C.A.  
Calle 9 de Octubre 88/B  
P.O. Box 1296, Guayaquil  
**QUITO**  
Tel: 306022  
Tel: 3361 FBCGYE UJ  
M

### EGYPT

Sakrcio Enterprises  
70, Mossadik Str.  
Dokki, Giza  
**Cairo**  
Tel: 705440  
Tel: 93146  
C

International Engineering Associates  
214 Hussein Hegazi Street  
Kasr-El-Ain  
**Cairo**  
Tel: 23829, 21641  
Tel: 93830 IEA UN  
Cable: INTEGASSO  
E.M.\*

### EL SALVADOR

IPESA de El Salvador S.A.  
29 Avenida Norte 1223  
**SAN SALVADOR**  
Tel: 26-8680, 26-8668  
Tel: 20539 IPESA SAL  
A.C.C.M.E.P.\*

### ETHIOPIA

Serie-Ethiopia  
P.O. Box 2764  
**ADDIS ABABA**  
Tel: 185114  
Tel: 21150  
C.P

### FINLAND

Hewlett-Packard Oy  
Pisgankallontie 17  
02200 ESPOO  
**HELSINKI**  
Tel: 00359-0-83721  
Tel: 121563 HEWPA PF  
A.C.C.M.E.M.P.\*

### FRANCE

Hewlett-Packard France  
Z.I. Mercure B  
Rue Berthelot  
13763 Les Milles Cedex  
**AUXERRE-PROVENCE**  
Tel: (42) 69-4102  
Tel: 41070F  
A.C.C.M.E.P.\*

Hewlett-Packard France  
64, rue Marchand Sallant  
61000 ALENCON  
Tel: (33) 29 04 42

Hewlett-Packard France  
28 rue de la République  
Boite Postale 500  
25026 BESANCON Cedex  
Tel: (81) 83-16-22  
Tel: 361157  
C.M

Hewlett-Packard France  
Chemin des Moultes  
Boite Postale 162  
69130 ECULLY Cedex (Lyon)  
Tel: (78) 833-81-25  
Tel: 310617F  
A.C.C.M

Hewlett-Packard France  
Parc d'activités du Bois Briard  
2, avenue du Lic  
91040 EVRY Cedex  
Tel: 6 077-96 60  
Tel: 692315F  
E

Hewlett-Packard France  
5, avenue Raymond Chanas  
93320 EYBENS (Gennevilliers)  
Tel: (76) 62-57-99  
Tel: 980124 HP GRENBOB EYBE  
C

Hewlett-Packard France  
Rue Fernand Forest  
Z.A. Kergarides  
29230 QUÉVENOU  
Tel: (88) 41-87-90

Hewlett-Packard France  
Centre d'affaires Paris-Nord  
Bâtiment Amphre  
Rue de la Commune de Paris  
Boite Postale 300  
93153 LE BLANC-MESNIL  
Tel: (1) 865-44-52  
Tel: 211032F  
C.E.M

Hewlett-Packard France  
Parc d'activités Cedera  
Quartier Jean-Mermoz  
Avenue du Président J.F. Kennedy  
F-33700 MÉRIGNAC (Bordeaux)  
Tel: (56) 34-00-94  
Tel: 550105F  
C.E.M

Hewlett-Packard France  
Immeuble "Les 3 B"  
Nouveau chemin de la Garde  
ZAC du Bois Briard  
44085 NANTES Cedex  
Tel: (40) 50-32-22  
Tel: 711085F  
C\*\*

Hewlett-Packard France  
125, rue du Faubourg Banrier  
45000 ORLÉANS  
Tel: (88) 68 01 63



## FRANCE (Cont'd)

Hewlett-Packard France  
Zone Industrielle de Courtaubouf  
Avenue des Tropiques  
91947 Les Ulis Cedex **ORSAY**  
Tel: (6) 907-78-25  
Telex: 600046F  
A.C.C.M.E.M.P.

Hewlett-Packard France  
Paris Porte-Maitot  
15, boulevard de L'Amiral-Bruix  
75762 PARIS Cedex 16  
Tel: (1) 502-12-20  
Tel: (1) 63-5535F  
C.M.P.

Hewlett-Packard France  
124, Boulevard Tourasse  
64000 **PAU**  
Tel: (59) 80 38 02

Hewlett-Packard France  
2 Allée de la Bourgonnette  
35100 **RENNES**  
Tel: (89) 51-42-44  
Tel: 742912F  
C.C.M.E.M.P.\*

Hewlett-Packard France  
98 avenue de Bretagne  
76100 **ROUEN**  
Tel: (35) 63-57-66  
Tel: 770035F  
C

Hewlett-Packard France  
4, rue Thomas-Mann  
Boite Postale 55  
61023 **STRASBOURG** Cedex  
Tel: (89) 28-56-48  
Tel: 890141F  
C.E.M.P.\*

Hewlett-Packard France  
La Pépinière III  
20, chemin du Pigeonnier de la Cèpre  
F-31083 **TOULOUSE** Cedex  
Tel: (61) 40-11-12  
Tel: 531639F  
A.C.E.P.\*

Hewlett-Packard France  
5, rue Baurin  
26000 **VALENCE**  
Tel: (75) 42 75 16

Hewlett-Packard France  
Caribry  
ZAC de Bois Briand  
57640 **VIËT** (Metz)  
Tel: (8) 771 20 22  
C

Hewlett-Packard France  
Parc d'activité des Prés  
1, rue Pajon  
59658 **VILLENEUVE D'ASCO** Cedex  
Tel: (20) 47 78 78  
Tel: 160124F  
C.E.M.P.\*

## GABON

P.O. Box 89  
**LIBREVILLE**  
Tel: 721 484  
Tel: 5230

## GERMAN FEDERAL REPUBLIC

Hewlett-Packard GmbH  
Geschäftsstelle  
Kohlstrasse 2-4  
D-1000 **BERLIN 30**  
Tel: (030) 21 99 04-0  
Tel: 018 3405 hpbn d  
A.C.C.M.E.M.P.

Hewlett-Packard GmbH  
Vertriebszentrum Südwest  
Sollachardstrasse 2  
D-7030 **BADLINGS**  
Tel: (07031) 645-0  
Tel: 7265 743 hep  
A.C.C.M.E.M.P.

Hewlett-Packard GmbH  
Vertriebszentrum West  
Berliner Strasse III  
D-4003 **RATINGEN** 3  
Tel: (02102) 434-0  
Tel: 559 070 hprad  
A.C.C.M.E.M.P.

Hewlett-Packard GmbH  
Geschäftsstelle  
Schleifstr. 28a  
D-4600 **DORTMUND-41**  
Tel: (0231) 45001  
Tel: 822858 hepbad  
A.C.E.

Hewlett-Packard GmbH  
Vertriebszentrum Mitte  
Hewlett-Packard-Strasse  
D-6380 **BAD HOMBURG**  
Tel: (06172) 400-0  
Tel: 410 844 hpbg  
A.C.E.M.P.

Hewlett-Packard GmbH  
Vertriebszentrum Nord  
Kapstadtstr. 5  
D-2000 **HAMBURG 60**  
Tel: (040) 63804-1  
Tel: 021 63 032 hpnh d  
A.C.C.M.E.M.P.

Hewlett-Packard GmbH  
Geschäftsstelle  
Heidinger 37-39  
D-3000 **HANNOVER 61**  
Tel: (0511) 5706-0  
Tel: 092 3259  
A.C.C.M.E.M.P.

Hewlett-Packard GmbH  
Geschäftsstelle  
Flossbüßer Weg 2-4  
D-8500 **MÜNCHEN**  
Tel: (0621) 70 05-0  
Tel: 0462105  
A.C.E.

Hewlett-Packard GmbH  
Geschäftsstelle  
Messerschmittstrasse 7  
D-9100 **NEU-ULM**  
Tel: (0731) 70 73-0  
Tel: 0712816 HP ULM-D  
A.C.E.\*

Hewlett-Packard GmbH  
Geschäftsstelle  
Emmercher Strasse 13  
D-8500 **MÜNCHEN 10**  
Tel: (089) 5205-0  
Tel: 0623 860 hpnbg  
C.C.M.E.M.P.

Hewlett-Packard GmbH  
Vertriebszentrum Süd  
Eschenstrasse 5  
D-6028 **TAUFKIRCHEN**  
Tel: (059) 61 20 7-0  
Tel: 0524985  
A.C.C.M.E.M.P.

Hewlett-Packard GmbH  
Geschäftsstelle  
Ermisallee  
7517 **WALDBRONN 2**  
Tel: (07243) 602-0  
Tel: 782 638 hep  
A.C.E.

## GREAT BRITAIN

See United Kingdom

## GREECE

Hewlett-Packard A.E.  
178, Kifissias Avenue  
6th Floor  
Halandri **ATHENS**  
Tel: 6471543, 6471673, 6472971  
Tel: 221 286 HPHLGR  
A.C.C.M.P.\*E.M.P.

Kostas Karayannis S.A.  
8, Omicron Street  
**ATHENS 133**  
Tel: 32 30 303, 32 37 31  
Tel: 215662 RKAR GR  
A.C.\*C.M.E.

Impexin  
Intellect Div.  
209 Mesongon  
**ATHENS 11525**  
Tel: 6474481/2  
Tel: 216286  
P

Harli Company  
38, Mihalakopoulou  
11525 **ATHENS**  
Tel: 218767  
M\*

Hellamco  
P.O. Box 87528  
19507 **PRAEUS**  
Tel: 4827049  
Tel: 241441  
A

## GUATEMALA

IPESA  
Avenida Reforma 3-46, Zona 9  
**GUATEMALA CITY**  
Tel: 216527, 214786  
Tel: 3055765 IPESA GU  
A.C.C.M.E.M.P.

## HONG KONG

Hewlett-Packard Hong Kong, Ltd.  
G.P.O. Box 795  
5th Floor, Sun Hung Kai Centre  
30 Harbour Road  
**HONG KONG**  
Tel: 8-832311  
Tel: 66678 HEWPA HX  
Cable: HEWPACK Hong Kong  
E.C.P.

CEI Ltd.  
16th Floor, Hua Asia Bldg.  
64-66 Gloucester Road  
**HONG KONG**

Tel: (5) 200922  
Tel: 85148 CEI HX  
CM

Schmidt & Co. (Hong Kong) Ltd.  
18th Floor, Great Eagle Centre  
23 Harbour Road  
**HONG KONG**  
Tel: (852) 5-830222  
Tel: 74766 SCHMC HX  
A.M.

## ICELAND

Hewlett-Packard Ísland  
Hoeflabakka 9  
110 **Reykjavik**  
Tel: (1) 67 1000  
A.C.C.M.E.M.P.

## INDIA

Computer products are sold through  
Blue Star Ltd. All computer repairs and  
maintenance service is done through  
Computer Maintenance Corp.

Blue Star Ltd.  
Sabji Complex 2nd Floor  
24 Residency Rd.  
**BANGALORE** 560 025  
Tel: 55650, 578881  
Tel: 0845-430

Cable: BLUESTAR  
A.C.\*C.M.E.

Blue Star Ltd.  
Band Box House  
Prabhadevi  
**BOMBAY** 400 025  
Tel: 4933101, 4933222  
Tel: 011-71051  
Cable: BLUESTAR  
A.M.

Blue Star Ltd.  
Sehas  
44/2 Vr Savarkar Marg  
Prabhadevi  
**BOMBAY** 400 025  
Tel: 422-1155, 422-6556  
Tel: 011-71193 BSSS IN  
Cable: FROSTBLUE  
A.C.\*C.M.E.M.

Blue Star Ltd.  
Kalyan, 19 Veshwas Colony  
Akrapur, **BONDA**, 399 005  
Tel: 65235, 65238  
Cable: BLUE STAR  
A

Blue Star Ltd.  
7 Hare Street  
**CALCUTTA** 700 001  
Tel: 230131, 230132  
Tel: 021-7655  
Cable: BLUESTAR  
A.M.

Blue Star Ltd.  
133 Kodambakkam High Road  
**MADRAS** 600 034  
Tel: 472056, 472028  
Tel: 401-379  
Cable: BLUESTAR  
A.M.

Blue Star Ltd.  
13 Community Center  
New Friends Colony  
**NEW DELHI** 110 065  
Tel: 633773, 634473  
Tel: 031-61120  
Cable: BLUEFROST  
A.C.\*C.M.E.M.

Blue Star Ltd.  
15/16 C Wellesley Rd.  
**PUNE** 411 011  
Tel: 22775  
Cable: BLUE STAR  
A

Blue Star Ltd.  
2-2-47/1108 Bolanur Rd.  
**SECUNDERABAD** 500 003  
Tel: 72051, 72058  
Tel: 0155645  
Cable: BLUEFROST  
A.E.

Blue Star Ltd.  
T.C. 7/603 Poomina  
Manthunkuzhi  
**TRIVANDRUM** 695 013  
Tel: 65799, 65820  
Tel: 0884-259  
Cable: BLUESTAR  
E

Computer Maintenance Corporation  
Ltd.  
115, Sarojini Devi Road  
**SECUNDERABAD** 500 003  
Tel: 310-184, 345-774  
Tel: 031-2960  
C\*\*

## INDONESIA

BERCA Indonesia P.T.  
P.O. Box 496/Jkt.  
Jl. Abadi Mus 62  
**JAKARTA**  
Tel: 21-373009  
Tel: 46748 BERSAL IA  
Cable: BERSAL JAKARTA  
P

BERCA Indonesia P.T.  
P.O. Box 2497/Jkt  
Antara Bdg., 12th Floor  
Jl. Medan Merdeka Selatan 17  
**JAKARTA-PUSAT**  
Tel: 21-340417, 341445  
Tel: 45748 BERSAL IA  
A.C.E.M.

BERCA Indonesia P.T.  
Jalan Kutai 24  
**SURABAYA**  
Tel: 67118  
Tel: 91148 BERSAL SB  
Cable: BERSAL-SURABAYA  
A\*E.M.P.

## IRAQ

Hewlett-Packard Trading S.A.  
Service Operation  
Al Mansour City 9B/3/7  
**BAGHDAD**  
Tel: 551-49-73  
Tel: 212-455 HEPAIRAQ IK  
C

## IRELAND

Hewlett-Packard Ireland Ltd.  
82-83 Lower Leeson Street  
**DUBLIN 2**  
Tel: 001 608800  
Tel: 30439  
A.C.C.M.E.M.P.

Cardiac Services Ltd.  
Kilmore Road  
Ardee  
**DUBLIN 5**  
Tel: (01) 351820  
Tel: 30439  
M



## SALES & SUPPORT OFFICES

Arranged alphabetically by country

### ISRAEL

Edan Electronic Instrument Ltd.  
P.O. Box 1270  
**JERUSALEM 91000**  
16, Ohalav St.  
**JERUSALEM 94467**  
Tel: 533 221, 553 242  
Telex: 25231 AB/PAKRD IL  
A.M.

Computation and Measurement  
Systems (CMS) Ltd.  
11 Mesad Street  
67650

**TEL-AVIV**  
Tel: 388 388  
Telex: 23569 Motl IL  
C.C.M.E.P.

### ITALY

Hewlett-Packard Italiana S.p.A.  
Traversa 99C  
Via Giulio Petroni, 19  
I-70124 **BARI**  
Tel: (080) 41-07-44  
C.M.

Hewlett-Packard Italiana S.p.A.  
Via Emilia, 51/C  
I-40011 **BOLOGNA** Anzola Dell'Emilia  
Tel: (051) 731061  
Telex: 511630  
C.C.M.

Hewlett-Packard Italiana S.p.A.  
Via Principe Nicola 43G/C  
I-95126 **CATANIA**  
Tel: (095) 31-10-87  
Telex: 970291  
C.

Hewlett-Packard Italiana S.p.A.  
Via G. D' Vittorio 5  
I-20053 **CERNUSCO SUL NAVIGLIO**  
(Milano)  
Tel: (02) 4459041  
Telex: 334632  
A.C.C.M.E.M.P.

Hewlett-Packard Italiana S.p.A.  
Via C. Colombo 49  
I-20090 **TREZZANO SUL NAVIGLIO**  
Tel: (02) 4459041  
Telex: 322116  
C.

Hewlett-Packard Italiana S.p.A.  
Via Nuova San Rocco a  
Capodimonte, 62/A  
I-80131 **NAPOLI**  
Tel: (081) 7413544  
Telex: 710698  
A\*\*/C.C.M.

Hewlett-Packard Italiana S.p.A.  
Viale G. Modugno 33  
I-16156 **GENOVA PEGLI**  
Tel: (010) 68-37-07  
Telex: 215238  
C.E.

Hewlett-Packard Italiana S.p.A.  
Via Pelizzo 15  
I-35128 **PADOVA**  
Tel: (049) 654888  
Telex: 430315  
A.C.C.M.

Hewlett-Packard Italiana S.p.A.  
Viale C. Pavese 340  
I-30144 **ROMA EUR**  
Tel: (06) 54831  
Telex: 610514  
A.C.C.M.P.\*

Hewlett-Packard Italiana S.p.A.  
I-50018 **SCANDICCI-FRENZE**  
Via di Casellina 57/C  
Tel: (055) 753863  
C.E.M.

Hewlett-Packard Italiana S.p.A.  
Conso Vizziera, 165  
I-10144 **TORINO**  
Tel: (011) 74 4044  
Telex: 221079  
A\*\*/C.E.

### IVORY COAST

S.I.T.E.L.  
Societe Ivoirienne de  
Telecommunications  
Bd. Giscard d'Estaing  
Carrefour Marocry  
Zone 4, A.  
Boite postale 2580  
**ABIDJAN 01**  
Tel: 253500  
Telex: 43175  
E

S.I.T.I.  
Immeuble "Le General"  
Av. du General de Gaulle  
01 BP 161  
**ABIDJAN 01**  
Tel: 321227  
C.P.

### JAPAN

Yokogawa-Hewlett-Packard Ltd.  
152-1, Onna  
**ATSUGI, Kanagawa, 243**  
Tel: (0462) 25-0031  
C.C.M.E.

Yokogawa-Hewlett-Packard Ltd.  
Meiji-Seimei Bldg. 6F  
3-1 Hon Chiba-Cho  
**CHIBA, 260**  
Tel: 472 25 7701  
C.E.

Yokogawa-Hewlett-Packard Ltd.  
Yasuda-Seimei Hiroshima Bldg.  
**HIROSHIMA, 730**  
Tel: 82-241-0611

Yokogawa-Hewlett-Packard Ltd.  
Towa Building  
2-3, Kaigan-dori, 2 Chome Chukuo-ku  
**KOBE, 650**  
Tel: (078) 392-4791  
C.E.

Yokogawa-Hewlett-Packard Ltd.  
Kumagaya Asahi 82 Bldg  
3-4 Tsurubata  
**KUMAGAYA, Saitama 360**  
Tel: (0485) 24-5563  
C.C.M.E.

Yokogawa-Hewlett-Packard Ltd.  
Asahi Shinbun Daiichi Seimei Bldg.  
4-7, Hanabata-cho  
**KUMABOTO, 860**  
Tel: (096) 354-7311  
C.E.

Yokogawa-Hewlett-Packard Ltd.  
Shin-Kyoto Center Bldg  
614, Higashi-Shiroji-cho  
Karasuma-Nishiru  
Shokoji-dori, Shimogyo-ku  
**KYOTO, 600**  
Tel: 075-343-0921  
C.E.

Yokogawa-Hewlett-Packard Ltd.  
Mito Mitsui Bldg  
4-73, Sanno-man, 1 Chome  
**MITO, Ibaraki 310**  
Tel: (0292) 25-7470  
C.C.M.E.

Yokogawa-Hewlett-Packard Ltd.  
Meiji-Seimei Kokubun Bldg. 7-8  
Kokubun, 1 Chome, Sendai  
**MIYAGI, 980**  
Tel: (0222) 25-1011  
C.E.

Yokogawa-Hewlett-Packard Ltd.  
Nagoya Kokusai Center Building  
47-1, Nagoya, 1 Chome  
Natsunuma-ku  
**NAGOYA, 450**  
Tel: (052) 571-5171  
C.C.M.E.

Yokogawa-Hewlett-Packard Ltd.  
Sakuyuen Building  
1-2 Dote-machi, **OHMIYA**  
Saitama 330  
Tel: (0486) 45-8031

Yokogawa-Hewlett-Packard Ltd.  
Crus Bldg.,  
4-20 Nishinakajima, 5 Chome  
Nishiyama-ku  
**OSAKA, 532**  
Tel: (06) 304-6021

Yokogawa-Hewlett-Packard Ltd.  
152-1, Onna  
**ATSUGI, Kanagawa, 243**  
Tel: (0462) 25-0031  
C.C.M.E.

Yokogawa-Hewlett-Packard Ltd.  
Meiji-Seimei Bldg. 6F  
3-1 Hon Chiba-Cho  
**CHIBA, 260**  
Tel: 472 25 7701  
C.E.

Yokogawa-Hewlett-Packard Ltd.  
Yasuda-Seimei Hiroshima Bldg.  
**HIROSHIMA, 730**  
Tel: 82-241-0611

Yokogawa-Hewlett-Packard Ltd.  
Towa Building  
2-3, Kaigan-dori, 2 Chome Chukuo-ku  
**KOBE, 650**  
Tel: (078) 392-4791  
C.E.

Yokogawa-Hewlett-Packard Ltd.  
Kumagaya Asahi 82 Bldg  
3-4 Tsurubata  
**KUMAGAYA, Saitama 360**  
Tel: (0485) 24-5563  
C.C.M.E.

Yokogawa-Hewlett-Packard Ltd.  
Meiji-Seimei  
Utsunomiya Ooori Building  
1-5 Odori, 2 Chome  
**UTSUNOMIYA, Tochigi 320**  
Tel: (0286) 33-1153  
C.E.

Yokogawa-Hewlett-Packard Ltd.  
Yasuda Seimei Yokohama Nishiguchi  
Bldg.  
30-4 Tsuruya-cho, 3 Chome  
**YOKOHAMA 221**  
Tel: (045) 312-1252  
C.E.

**JORDAN**  
Scientific and Medical Supplies Co.  
P.O. Box 1387  
**AMMAN**  
Tel: 24907, 39907  
Telex: 21456 SABCO JO  
C.E.M.P.

**KENYA**  
ADCOM Ltd., Inc., Kenya  
P.O. Box 30070  
**NAIROBI**  
Tel: 319555  
Telex: 22639  
E.M.

**KOREA**  
Samsung Hewlett-Packard Co. Ltd.  
Dongbang Yeeuodo Building  
12-15th Floors  
26-1 Yeeuodo-dong  
Yongdeungpo-ku  
**SEOUL**  
Tel: 784-2665, 784-4666  
Telex: 25166 SAMSAN K  
A.C.C.M.E.M.P.

Young In Scientific Co., Ltd.  
Younghua Building  
547 Shinsa Dong, Kangnam-ku  
**SEOUL, 135**  
Tel: 5467771  
Telex: K23457 GINSCO  
A

**KUWAIT**  
Al-Khodaya Trading & Contracting  
P.O. Box 830  
**SAFAT**  
Tel: 424910, 411726  
Telex: 22481 AREEG KT  
Cable: VISCOUNT  
E.M.A.

Gulf Computing Systems  
P.O. Box 25125  
**SAFAT**  
Tel: 435969  
Telex: 23648  
E.M.P.

Photo & Cine Equipment  
P.O. Box 270  
**PORT LOUIS**  
Tel: 2445111  
Telex: 22247 MATIN KT  
Cable: MATSIN KUWAIT  
P.

W.J. Towell Computer Services  
P.O. Box 5897  
**SAFAT**  
Tel: 2462460  
Telex: 30336 TOWELL KT  
C.

**LEBANON**  
Computer Information Systems S.A.L.  
Chaamra Building  
P.O. Box 11-6274 Dora  
**BEIRUT**  
Tel: 89 40 73  
Telex: 42309  
C.E.M.P.

### LIBERIA

Unchemicals Inc.  
P.O. Box 4509  
**MOROVIA**  
Tel: 224282  
Telex: 4509  
E

### MADAGASCAR

Technique et Precision  
12, rue de Nice  
P.O. Box 1227  
101 **ANTANANARIVO**  
Tel: 22090  
Telex: 22255  
P.

**LUXEMBOURG**  
Hewlett-Packard Belgium S.A./N.V.  
Bvd de la Woluwe, 100  
Woluwedell  
B-1200 **BRUSSELS**  
Tel: (02) 752-32-00  
Telex: 23-494 paloben bru  
A.C.C.M.E.M.P.

### MALAYSIA

Hewlett-Packard Sales (Malaysia)  
Sdn. Bhd.  
9th Floor  
Chung Khaw Bank Building  
46, Jalan Raja Laut  
**KUALA LUMPUR**  
Tel: 93-86655  
Telex: 31011 HPSM MA  
A.C.E.M.P.\*

Protel Engineering  
P.O. Box 1917  
Lot 6624, Section 64  
23/4 Pending Road  
Kuching, **SARAWAK**  
Tel: 70904 PROMAL MA  
Cable: PROTELENG  
A.E.M.

Philp Toledo Ltd.  
Birkirkara P.O. Box 11  
Nichele Rd.  
**MALTA**  
Tel: 447 47, 455 66  
Telex: 1649  
E.M.P.

### MAURITIUS

Bianche Birger Co. Ltd.  
18, Jules Kenig Street  
**PORT LOUIS**  
Tel: 20823  
Telex: 4296  
P.

**MEXICO**  
Hewlett-Packard de Mexico, S.A.  
Monte Morelos 299  
Fraccionamiento Loma Bonita 45090  
**GUADALAJARA, Jalisco**  
Tel: 318630/314600  
Telex: 0684 186 ECOMEX  
P.

Hewlett-Packard de Mexico, S.A.  
Monte Morelos 299  
Fraccionamiento Loma Bonita 45090  
**GUADALAJARA, Jalisco**  
Tel: 318630/314600  
Telex: 0684 186 ECOMEX  
P.



## MEXICO (Cont'd)

Micropcomputadores Hewlett-Packard, S.A.  
Monte Pelona, 115  
LOS LOMAS, Mexico, D.F.  
Tel: 520-9127  
P

Hewlett-Packard Mexicana, S.A.  
de C.V.  
Av. Penitencio Sur No. 6501  
Tepepan, Xochimilco  
16020 MEXICO D.F.  
Tel: 6-70-46-00

Telex: 17-74-507 HEWPAK MEX  
A.C.C.M.E.M.P

Hewlett-Packard De Mexico (Poinco)  
Avenida Ejercito Nacional #579  
2da y 3ra piso  
Mexico Granada 11560  
MEXICO D.F.  
Tel: 254-4433  
P

Hewlett-Packard De Mexico, S.A.  
de C.V.  
Czda. del Valle  
409 Crte. 4th Piso  
Colonia del Valle  
Municipio de Garza Garcia  
65250 MONTERREY, Nuevo Leon  
Tel: 78-42-41

Telex: 038 410  
P

## MOROCCO

Establishment Hubert Dobeau & Fils  
81 rue Karachi  
CASABLANCA

Tel: 3041-82, 3068-38  
Telex: 22051, 22822  
E

Gerep  
2, rue Agadir  
Boite Postale 156  
CASABLANCA 01  
Tel: 272953, 272095  
Telex: 23 739  
P

Sema-Maroc  
Dept. Seric  
6, rue Lepoetie  
CASABLANCA  
Tel: 269980  
Telex: 21641  
C.P.

## NETHERLANDS

Hewlett-Packard Nederland B.V.  
Starboan 16  
1187 XR AMSTELVEEN  
P.O. Box 667  
NL 1180 AR AMSTELVEEN  
Tel: (020) 547-6911  
Telex: 13 216 HEPA NL  
A.C.C.M.E.M.P

Hewlett-Packard Nederland B.V.  
Bongard 2  
NL 2905VK CAPELLE A/D IJSSEL  
P.O. Box 41  
NL 2900AA CAPELLE A/D IJSSEL  
Tel: (0) 51-64-44  
Telex: 21261 HEPAK NL  
C.E.

Hewlett-Packard Nederland B.V.  
Pastoor Petersstraat 134-136  
NL 5612 LV EINDHOVEN  
P.O. Box 2342  
NL 5600 CH EINDHOVEN  
Tel: (040) 326911  
Telex: 51484 hepap nl  
A.C.E.M.P

## NEW ZEALAND

Hewlett-Packard (N.Z.) Ltd.  
5 Owens Road  
P.O. Box 26-169  
Epsom, AUCKLAND  
Tel: 687-159  
Cable: HEWPAK Auckland  
C.O.M.E.P.\*

Hewlett-Packard (N.Z.) Ltd.  
4-12 Crickshank Street  
Kilbirnie, WELLINGTON 3  
P.O. Box 9443  
Courtenay Place, WELLINGTON 3  
Tel: 877-199  
Cable: HEWPAK Wellington  
C.O.M.E.P.\*

Northrop Instruments & Systems Ltd.  
369 Rhymer Pass Road  
P.O. Box 9502  
AUCKLAND  
Tel: 794-091  
Telex: 66605  
A.M.

Northrop Instruments & Systems Ltd.  
110 Mandville St.  
P.O. Box 8388  
CHRISTCHURCH  
Tel: 489-873  
Telex: 4203  
A.M.

Northrop Instruments & Systems Ltd.  
Sturdee House  
65-87 Ghuznee Street  
P.O. Box 2406  
WELLINGTON  
Tel: 850-991  
Telex: NZ 3399  
A.M.

## NIGERIA

Emeco Nigeria Ltd.  
46, Calcutta Crescent Apapa  
P.O. Box 244and  
LAGOS

E

## NORTHERN IRELAND

### See United Kingdom

## NORWAY

Hewlett-Packard Norge A/S  
Folke Bernadottes vei 50  
P.O. Box 3558  
N-5033 PYLLINGSDALEN (Bergen)  
Tel: 0047/5116 55 40  
Telex: 76521 hpnas n  
C.E.M.

Hewlett-Packard Norge A/S  
Osterandalen 16-19  
P.O. Box 34  
N-1345 OSTERAS  
Tel: 0047/217 11 80  
Telex: 76521 hpnas n  
A.C.C.M.E.M.P

## OMAN

Khinjil Ramdas  
P.O. Box 19  
MUSCAT/SULTANATE OF OMAN  
Tel: 745601  
Telex: 6269 BROKER MB MUSCAT  
P

Suhail & Saud Bahwan  
P.O. Box 169  
MUSCAT/SULTANATE OF OMAN  
Tel: 734201  
Telex: 5274 BAHWAN MB  
E

Imtaz LLC  
P.O. Box 6676  
MUTRAN/SULTANATE OF OMAN  
Tel: 601655  
Telex: 5741 Tawoos On  
A.C.M.

## PAKISTAN

Mushko & Company Ltd  
House No. 16, Street No. 16  
Sector F-6/3  
ISLAMABAD

Tel: 824545  
Cable: FEMUS Islamabad  
A.E.M.P.\*

Mushko & Company Ltd  
Cosman Chambers  
Abdullah Haroon Road  
KARACHI 5302  
Tel: 524131, 534132  
Telex: 2894 MUSKO PK  
Cable: COOPERATOR Karachi  
A.E.M.P.\*

## PANAMA

Electronico Balboa, S.A.  
Calle Samuel Lewis, Ed. Alfa  
Apartado 4929  
PANAMA 5  
Tel: 64-2700  
Telex: 3483 ELECTRON PG  
A.C.C.M.E.M.P

## PERU

Cla Electro Médica S.A.  
Los Flamencos 145, Ofc. 301/2  
San Isidro  
Casilla 1030  
LIMA 1

Tel: 41-4325, 41-3705  
Telex: Pub. Booth 25306 PEC FISDR  
C.M.E.M.P

SAMS  
Avenida Republica de Panama 3534  
San Isidro, LIMA  
Tel: 419928/417108  
Telex: 20450 PE LIBERTAD  
A.C.P.

## PHILIPPINES

The Online Advanced Systems Corp.  
2nd Floor, Electra House  
115-117 Estroban Street  
Legato Village, Makati  
Metro MANILA  
Tel: 815-38-10 (up to 16)  
Telex: 63274 ONLINE PN  
A.C.C.M.E.M.P

## PORTUGAL

Mundinter Comercio  
Mundial de Comercio S.A.R.L.  
Av. Antonio Augusto Aguiar 138  
Apartado 2761  
LISBON

Tel: (19) 53-21-31, 53-21-37  
Telex: 169971 murter p  
M

Soiquima  
Av. da Liberdade, 220-2  
1238 LISBOA Codes  
Tel: 56-21-82  
Telex: 13316 SABASA  
A

Telecra-Empresa Técnica de  
Equipamentos Eléctricos S.A.R.L.  
Rua Rodrigo da Fonseca 103  
P.O. Box 2531  
LISBON 1  
Tel: (19) 68-60-72  
Telex: 32598  
C.M.E.

C.P.C.S.I.  
Rua de Costa Cabral 575  
4200 PORTO  
Tel: 499174/495173  
Telex: 26054  
C.P.

## PUERTO RICO

Hewlett-Packard Puerto Rico  
101 Muñoz Rivera Av  
Esq. Calle Gacha  
HATOYE, Puerto Rico 00918  
Tel: (809) 754-7800  
A.C.C.M.I.E.P

## QATAR

Computer Arabia  
P.O. Box 2750  
DOHA  
Tel: 426555  
Telex: 4806 CHPARB  
P

Nasser Trading & Contracting  
P.O. Box 1563  
DOHA  
Tel: 427120  
Telex: 4439 NASSER DH  
M

## SAUDI ARABIA

Modern Electronics Establishment  
Hewlett-Packard Division  
P.O. Box 281  
Thouqah  
AL-KHOBAR 31952  
Tel: 695-1760, 695-1764  
Telex: 871 106 HRMEEK SJ  
Cable: ELECTA AL-KHOBAR  
C.E.M.

Modern Electronics Establishment  
Hewlett-Packard Division  
P.O. Box 1228  
JEDDAH  
Tel: 644 96 28  
Telex: 4027 12 FARNAS SJ  
Cable: ELECTA JEDDAH  
A.C.C.M.E.M.P

Modern Electronics Establishment  
Hewlett-Packard Division  
P.O. Box 22015  
RIVADH 11495  
Tel: 815-38-10 (up to 16)  
Telex: 202499 MEERYD SJ  
A.C.C.M.E.M.P

Abdul Ghani El Ajou Corp.  
P.O. Box 78  
RIYADH  
Tel: 40 41 717  
Telex: 200 931 EL AJOU  
P

## SCOTLAND

### See United Kingdom

## SENEGAL

Societe Hussein Ayad & Cie.  
76, Avenue Georges Pompidou  
B.P. 305  
DAKAR  
Tel: 23239  
Cable: AYAD-Dakar  
E

Monoger Distribution S.A.  
1, Rue Parent  
B.P. 148  
DAKAR  
Tel: 215 671  
Telex: 587  
P

Systeme Service Conseil (SSC)  
14, Avenue du Parachute  
DAKAR ETOILE  
Tel: 219976  
Telex: 577  
C.P.

## SINGAPORE

Hewlett-Packard Singapore (Sales)  
Pte. Ltd.  
08-00 Indopace House  
450-2 Alexandra Road  
Alexandra P.O. Box 58  
SINGAPORE, 9115  
Tel: 4731788  
Telex: 34209 HPGSOG RS

Cable: HEWPAK, Singapore  
A.C.C.M.E.P

Dynamar International Ltd.  
Unit 05-11 Block 6  
Kalam Ayer Industrial Estate  
SINGAPORE 1334  
Tel: 747-6189  
Telex: 28283 RS  
CM

## SOUTH AFRICA

Hewlett-Packard So Africa (Pty.) Ltd.  
P.O. Box 120  
Howard Place CAPE PROVINCE 7450  
Pine Park Center, Forest Drive, Fene-  
lands

CAPE PROVINCE 7405  
Tel: (021) 53 7954  
Telex: 57-20006  
A.C.C.M.E.M.P

Hewlett-Packard So Africa (Pty.) Ltd.  
2nd Floor Juniper House  
52 Overport Drive  
DURBAN 4057  
Tel: (031) 28-4178  
Telex: 6-22554  
C

Hewlett-Packard So Africa (Pty.) Ltd.  
6 Linton Arcade  
511 Cape Road  
URINAM George  
PORT ELIZABETH 6001  
Tel: 401-301021  
Telex: 24-2916  
C



## SALES & SUPPORT OFFICES

Arranged alphabetically by country

### SOUTH AFRICA (Cont'd)

Hewlett-Packard So Africa (Pty) Ltd.  
Fountain Center  
Kalkden Str.  
Monument Park Ext 2  
PRETORIA 0105  
Tel: (012) 45 57258  
Telex: 3-21063  
C.E.

Hewlett-Packard So Africa (Pty) Ltd.  
Private Bag Hensleywood  
SANDTON 2144  
Tel: 802-5111, 802-5125  
Telex: 4-20877 SA  
Cable: HEWPACK Johannesburg  
A.C.C.M.E.M.P

### SPAIN

Hewlett-Packard Española S.A.  
Calle Entenza, 321  
08029 BARCELONA  
Tel: 3/222 24 51, 321 73 54  
Telex: 52093 hpbpe  
A.C.C.M.E.M.P

Hewlett-Packard Española S.A.  
Calle San Vicente S/N  
Edificio Albia II-7B  
48001 BILBAO  
Tel: 4/423 83 06  
A.C.C.M.E.M.P

Hewlett-Packard Española S.A.  
Cris. de la Courta, Km. 16, 400  
Las Rozas  
E-MADRID  
Tel: (1) 637.00.11  
Telex: 23515 HPE  
C.M.

Hewlett-Packard Española S.A.  
Avenida S. Francisco Javier, S/N  
Planta 10, Edificio Sevilla 2  
41005 SEVILLA  
Tel: 54/64 44 54  
Telex: 72933  
A.C.M.P.

Hewlett-Packard Española S.A.  
Isabel La Católica, 8  
46004 VALENCIA  
Tel: 0034/6/351 59 44  
C.P.

### SWEDEN

Hewlett-Packard Sverige AB  
Ostra Tullgatan 3  
S-21128 MALMÖ  
Tel: (040) 70270  
Telex: (854) 17886 (via Spånga  
office)  
C.P.

Hewlett-Packard Sverige AB  
Skotshögatan 9, Kista  
Box 19  
S-16393 SPÅNGA  
Tel: (08) 750-2000  
Telex: (854) 17886  
Telex: (08) 7527781  
A.C.C.M.E.M.P

Hewlett-Packard Sverige AB  
Fridslipgatan 30  
S-42132 VÄSTRA-FRÖLUNDA (Göthen-  
burg)  
Tel: (031) 49-09-50  
Telex: (854) 17886 (via Spånga  
office)  
A.C.C.M.E.M.P

### SUDAN

Mediterranean Engineering & Trading  
Co. Ltd.  
P.O. Box 1025  
KHARTOUM  
Tel: 41184  
Telex: 24052  
C.P.

### SWITZERLAND

Hewlett-Packard (Schweiz) AG  
Clarusstrasse 12  
CH-4058 BASEL  
Tel: (61) 33-59-20  
A

Hewlett-Packard (Schweiz) AG  
7, rue du Broyard-Lan  
Case postale 365  
CH-1217 MEYRIN 1  
Tel: (0041) 22-83-11-11  
Telex: 21333 HPAG CH  
C.M.

Hewlett-Packard (Schweiz) AG  
Allmend 2  
CH-8967 WIDEN  
Tel: (0041) 57 31 21 11  
Telex: 53933 hpag ch  
Cable: HPAG CH  
A.C.C.M.E.M.P

### SYRIA

General Electronic Inc.  
Nuri Baban Ahsaf Ibn Kays Street  
P.O. Box 5781  
DAMASCUS  
Tel: 33-24-87  
Telex: 411 215  
Cable: ELECTROBOR DAMASCUS  
E

Middle East Electronics  
P.O. Box 2308  
Abu Fumaneh  
DAMASCUS  
Tel: 33 45 92  
Telex: 411 771  
M

### TAIWAN

Hewlett-Packard Taiwan  
Kashuing Office  
11/F, 456, Chung Hsiao 1st Road  
KAOSUNG  
Tel: (07) 2412318  
C.E.

Hewlett-Packard Taiwan  
8th Floor, Hewlett-Packard Building  
337 Fu Hsing North Road  
TAIPEI  
Tel: (02) 712-0404  
Telex: 24433 HEWPACK  
Cable: HEWPACK Taipei  
A.C.C.M.E.M.P

Ing Lih Trading Co.  
3rd Floor, 7 Jen-Ai Road, Sec. 2  
TAIPEI 100  
Tel: (02) 3948191  
Telex: 406 INLIH Taipei  
A

### THAILAND

Unimesa Co. Ltd.  
30 Patpong Ave., Suriwong  
BANGKOK 5  
Tel: 235-5727  
Telex: 84439 Simonco TH  
Cable: UNIMESA Bangkok  
A.C.C.M.E.M.P

Bangkok Business Equipment Ltd.  
5/5-6 Dejo Road  
BANGKOK  
Tel: 234-8670, 234-8671  
Telex: 87699-BEQUIPT TH  
Cable: BUSIQUIPT Bangkok  
P

### TOGO

Societe Africaine De Promotion  
Immeuble Sagap  
22, Rue d'Atakpame  
B.P. 4150  
LOME  
Tel: 21-62-88  
Telex: 5304  
P

### TRINIDAD & TOBAGO

Caribbean Telecoms Ltd.  
Corner McAlister Street &  
Eastern Main Road, Laventille  
P.O. Box 732

### PORT-OF-SPAIN

Tel: 624-4213  
Telex: 22561 CARTEL WG  
Cable: CARTEL, PORT OF SPAIN  
C.M.E.M.P

Computer and Controls Ltd.  
P.O. Box 51  
66 Independence Square

### PORT-OF-SPAIN

Tel: 62-279-85  
Telex: 3000 POSTLX WG, ACCT  
LOGO AGENCY 1264  
A,P

### Feral Assoc.

8 Fitzgerald Lane  
PORT-OF-SPAIN  
Tel: 62-38564, 62-39255  
Telex: 22432 FERALCO  
M

### TUNISIA

Precision Electronique S.A.R.L.  
31 Avenue de la Liberté  
TUNIS  
Tel: 895937  
Telex: 12328  
P

Tunisie Electronique S.A.R.L.  
94, Av. Jurgutha, Mutuelleville  
1002 TUNIS-BELVEDERE  
Tel: 280144  
Telex: 12328  
C.E.P.

### Corema S.A.

23, bis Rue de Marseille  
TUNIS  
Tel: 253-821  
Telex: 14812 CABAM TN  
M

### TURKEY

E.M.A.  
Mediha Eldem Sokak No. 41/6  
Yenisehir  
ANKARA  
Tel: 319175  
Telex: 45912 KTX TR  
Cable: EMATRADE ANKARA  
M

Teknim Company Ltd.  
Iran Caddesi No: 7  
Kavakdere  
ANKARA  
Tel: 275600  
Telex: 42155 TKNM TR  
E.C.M.

### Savva Bilgiyay Sistemleri A.S.

Buyukdere Caddesi 103/6  
Gayretliye  
ISTANBUL  
Tel: 1727030  
Telex: 26345 SANI TR  
C.P.

Best Inc.  
Esnirape, Gazeteciler Sitesi  
Keskun Kalemey  
Sokak 6/3, Gayretliye  
ISTANBUL  
Tel: 1721328  
Telex: 42490  
A

### UNITED ARAB EMIRATES

Emirat Ltd.  
P.O. Box 1641  
SHARJAH  
Tel: 59118  
Telex: 68139 EMITAC EM  
Cable: EMITAC SHARJAH  
E.C.M.P.A

### Emirat Ltd.

P.O. Box 2711  
ABU DHABI  
Tel: 820419-20  
Cable: EMITACH ABUDHABI

### Emirat Ltd.

P.O. Box 8391  
DUBAI  
Tel: 377591  
Emirat Ltd.  
P.O. Box 473  
RAS AL KHAIMA  
Tel: 28133, 21270

### UNITED KINGDOM

### GREAT BRITAIN

Hewlett-Packard Ltd.  
Trafalgar House  
Navigation Road  
ALTRINCHAM  
Cheshire WA14 1NJ  
Tel: 061 928 6422  
Telex: 680608  
A.C.C.M.P

Hewlett-Packard Ltd.  
Miller House  
The Ring, BRACKNELL  
Berkshire RG12 1XN  
Tel: 0344 424859  
Telex: 848733  
E

### Hewlett-Packard Ltd.

Elstree House, Elstree Way  
BOREHAMWOOD, Herts WD6 1SG  
Tel: 01 207 5000  
Telex: 895216  
C.E.

### Hewlett-Packard Ltd.

Oakfield House, Oakfield Grove  
Clifton BRISTOL, Avon BS8 2BN  
Tel: 0272 736606  
Telex: 444302  
C.E.P.

Hewlett-Packard Ltd.  
Birdwell House  
9 Birdwell Place  
LONDON EC4V 6BS  
Tel: 01 583 8565  
Telex: 298163  
C.P.

### Hewlett-Packard Ltd.

Portefranch Road  
NORMATON, West Yorkshire WF6 1RN  
Tel: 024 855666  
Telex: 557355  
C.P.

### Hewlett-Packard Ltd.

The Quadrangle  
106-118 Station Road  
REDHILL, Surrey RH1 1PS  
Tel: 0737 66555  
Tel: 947234  
C.E.P.

### Hewlett-Packard Ltd.

Avon House  
435 Stratford Road  
Shirley, SOLIHULL, West Midlands  
B59 4LJ  
Tel: 021 745 8000  
Telex: 339105  
C.E.P.

### Hewlett-Packard Ltd.

West End House  
41 High Street, West End  
SOUTHAMPTON  
P.O. Box 300  
Tel: 0703 47677  
Telex: 477138  
C.P.

### Hewlett-Packard Ltd.

Harmon House  
No. 1 George Street  
LUDLOW, Herefordshire UX8 1YH  
Tel: 895 720 20  
Telex: 893134/S  
C.M.E.M.P

### Hewlett-Packard Ltd.

King Street Lane  
Winnesh, WOKINGHAM  
Berkshire RG11 5AR  
Tel: 0734 784774  
Telex: 847178  
A.C.C.M.P

### IRELAND

### NORTHERN IRELAND

Hewlett-Packard (Ireland) Ltd.  
Carrickbeg Industrial Centre  
75 Belfast Road, Carrickbeg  
BELFAST BT38 8PH  
Tel: 09603 67333  
Telex: 747626  
C.E.

### SCOTLAND

Hewlett-Packard Ltd.  
8 Woodside Place  
GLASGOW, G3 7GF  
Tel: 041 332 6232  
Telex: 779615  
C.E.

### Hewlett-Packard Ltd.

SOUTH QUEENSFERRY  
West Lothian, EH30 9TG  
Tel: 031 531 1188  
Telex: 72682  
C.M.E.M.P

**UNITED STATES**

**Alabama**  
Hewlett-Packard Co.  
700 Century Park South, Suite 128  
**BIRMINGHAM, AL 35226**  
Tel: (205) 822-6932  
A.C.M.E.\*

Hewlett-Packard Co.  
420 Wynn Drive  
**HUNTSVILLE, AL 35805**  
Tel: (205) 830-2000  
C, C.M.E.M.\*

**Alaska**  
Hewlett-Packard Co.  
3601 C St., Suite 1416  
**ANCHORAGE, AK 99503**  
Tel: (907) 563-8355  
C.E

**Arizona**  
Hewlett-Packard Co.  
8050 Pointe Parkway West  
**PHOENIX, AZ 85044**  
Tel: (602) 273-8000  
A.C.C.M.E.M.P

Hewlett-Packard Co.  
3400 East Bitaniana Dr.  
Bldg. C, Suite 124  
**TUCSON, AZ 85706**  
Tel: (602) 573-7400  
C.E.M.\*\*

**California**  
Hewlett-Packard Co.  
99 South Hill Dr.  
**BRISBANE, CA 94005**  
Tel: (415) 330-2500  
C

Hewlett-Packard Co.  
5060 E. Clinton Avenue, Suite 102  
**FRESNO, CA 93727**  
Tel: (209) 252-9522  
C.M

Hewlett-Packard Co.  
1421 S. Manhattan Av.  
**FULLERTON, CA 92631**  
Tel: (714) 999-6700  
C, C.M.E.M

Hewlett-Packard Co.  
7408 Hollister Ave. #A  
**GOLETA, CA 93117**  
Tel: (805) 685-6100  
C.E

Hewlett-Packard Co.  
5400 W. Rosecrans Blvd.  
**LAWNDALE, CA 90260**  
Tel: (213) 643-7500  
Telex: 910-325-6508  
C.M

Hewlett-Packard Co.  
2525 Grand Avenue  
**Long Beach, CA 90815**  
Tel: (213) 498-1111  
C

Hewlett-Packard Co.  
3155 Porter Drive  
**PALO ALTO, CA 94304**  
Tel: (415) 857-8000  
C.E

Hewlett-Packard Co.  
4244 So. Market Court, Suite A  
**SACRAMENTO, CA 95834**  
Tel: (916) 929-7222  
A\*, C.E.M

Hewlett-Packard Co.  
5606 Aero Drive  
**SAN DIEGO, CA 92123**  
Tel: (619) 279-3200  
C, C.M.E.M

Hewlett-Packard Co.  
5725 W. Las Positas Blvd.  
**Pleasanton, CA 94566**  
Tel: (415) 460-0262  
C

Hewlett-Packard Co.  
3003 Scott Boulevard  
**SANTA CLARA, CA 95054**  
Tel: (408) 989-7000  
Telex: 910-338-0586  
A.C.C.M.E.

Hewlett-Packard Co.  
2150 W. Hillcrest Dr.  
**THOUSAND OAKS, CA 91320**  
(805) 373-7000  
C, C.M.E

**Colorado**  
Hewlett-Packard Co.  
2945 Center Green Court South  
Suite A  
**BOULDER, CO 80501**  
Tel: (303) 939-3005  
A.C.E

Hewlett-Packard Co.  
24 Inverness Place, East  
**ENGLEWOOD, CO 80112**  
Tel: (303) 649-5000  
A.C.C.M.E.M

**Connecticut**  
Hewlett-Packard Co.  
500 Sylvan Av.  
**BRIDGEPORT, CT 06606**  
Tel: (203) 371-6454  
C

Hewlett-Packard Co.  
47 Barnes Industrial Road South  
**WALLINGFORD, CT 06492**  
Tel: (203) 265-7801  
A.C.C.M.E.M

**Florida**  
Hewlett-Packard Co.  
2901 N.W. 62nd Street  
**FORT LAUDERDALE, FL 33309**  
Tel: (305) 973-2000  
C.E.M.P.\*

Hewlett-Packard Co.  
6800 South Point Parkway  
Suite 301  
**JACKSONVILLE, FL 32216**  
Tel: (904) 998-0663  
C\*, M\*\*

Hewlett-Packard Co.  
6177 Lake Eleanor Drive  
**ORLANDO, FL 32809**  
Tel: (305) 859-2900  
A.C.C.M.E.P.\*

Hewlett-Packard Co.  
4700 Bayou Blvd.  
Building 5  
**PENSACOLA, FL 32503**  
Tel: (904) 476-8422  
A.C.M

Hewlett-Packard Co.  
5550 W. Idewild, 150  
Building 5  
**TAMPA, FL 33514**  
Tel: (813) 684-3282  
C.E.M.P

**Georgia**  
Hewlett-Packard Co.  
2000 South Park Place  
**ATLANTA, GA 30039**  
Tel: (404) 955-1500  
Telex: 810-746-4890  
A.C.C.M.E.M.P\*

Hewlett-Packard Co.  
3057 Parkway Lane  
Suite 300  
**NORCROSS, GA 30092**  
Tel: (404) 448-1894  
C.E.P

**Hawaii**  
Hewlett-Packard Co.  
Kawahao Plaza, Suite 190  
567 South King Street  
**HONOLULU, HI 96913**  
Tel: (808) 526-1555  
A.C.E.M

**Idaho**  
Hewlett-Packard Co.  
11309 Chinden Blvd.  
**BOISE, ID 83707**  
Tel: (208) 323-2700  
C

**Illinois**  
Hewlett-Packard Co.  
304 Eldorado Road  
P.O. Box 1691  
**BLOOMINGTON, IL 61701**  
Tel: (309) 662-9411  
C.M.\*\*

Hewlett-Packard Co.  
523 W. Monroe, 1308  
**CHICAGO, IL 60606**  
Tel: (312) 593-0010  
C

Hewlett-Packard Co.  
1200 East Deft Road  
**HAPERVILLE, IL 60556**  
Tel: (312) 357-8800  
C

Hewlett-Packard Co.  
5201 Toxnew Drive  
**ROLLING MEADOWS, IL 60008**  
Tel: (312) 255-8600  
Telex: 910-887-1066  
A.C.C.M.E.M

**Indiana**  
Hewlett-Packard Co.  
11911 N. Meridian St.  
**CARMEL, IN 46032**  
Tel: (317) 844-4100  
A.C.C.M.E.M

Hewlett-Packard Co.  
3702 Rupp Drive  
**FT. WAYNE, IN 46815**  
Tel: (219) 482-4283  
C.E

**Iowa**  
Hewlett-Packard Co.  
4070 22nd Av. SW  
**CEDAR RAPIDS, IA 52404**  
Tel: (319) 390-4250  
C.E.M

Hewlett-Packard Co.  
4201 Corporate Dr.  
**WEST DES MOINES, IA 50265**  
Tel: (515) 224-1435  
A\*\*, C.M.\*\*

**Kansas**  
Hewlett-Packard Co.  
7604 East Funston Road, 203  
**WICHITA, KS 67207**  
Tel: (316) 684-6491  
C.E

**Kentucky**  
Hewlett-Packard Co.  
10300 Linn Station Road, 100  
**LOUISVILLE, KY 40223**  
Tel: (502) 428-0100  
A.C.M

**Louisiana**  
Hewlett-Packard Co.  
169 James Drive East  
**ST. ROSE, LA 70037**  
P.O. Box 1449  
**Kenner, LA 70063**  
Tel: (504) 467-4100  
A.C.E.M.P

**Maryland**  
Hewlett-Packard Co.  
3701 Koppers Street  
**BALTIMORE, MD 21227**  
Tel: (301) 844-5800  
Telex: 710-662-1943  
A.C.C.M.E.

Hewlett-Packard Co.  
2 Choke Cherry Road  
**ROCKVILLE, MD 20850**  
Tel: (301) 948-6370  
A.C.C.M.E.

**Massachusetts**  
Hewlett-Packard Co.  
1775 Minuteman Road  
**ANDOVER, MA 01810**  
Tel: (617) 682-1500  
A.C.C.M.E.P.\*

Hewlett-Packard Co.  
32 Harwell Avenue  
**LEICESTER, MA 02173**  
Tel: (617) 861-8960  
C.E

**Michigan**  
Hewlett-Packard Co.  
4326 Cascade Road S.E.  
**GRAND RAPIDS, MI 49506**  
Tel: (616) 957-1970  
C.M

Hewlett-Packard Co.  
39350 Orchard Hill Place Drive  
**NOVLI, MI 48020**  
Tel: (313) 349-9200  
A.C.E.M

Hewlett-Packard Co.  
1771 W. Bg Beaver Road  
**TROY, MI 48064**  
Tel: (313) 643-6474  
C

**Minnesota**  
Hewlett-Packard Co.  
2025 W. Larpentour Ave.  
**ST. PAUL, MN 55113**  
Tel: (612) 644-1100  
A.C.C.M.E.M

**Missouri**  
Hewlett-Packard Co.  
1001 E. 101st Terrace Suite 120  
**KANSAS CITY, MO 64131-3368**  
Tel: (816) 941-6411  
A.C.C.M.E.M

Hewlett-Packard Co.  
13001 Holmberg Drive  
**BRIDGETON, MO 63044**  
Tel: (314) 344-5100  
A.C.E.M

**Nebraska**  
Hewlett-Packard  
10824 Old Mill Rd., Suite 3  
**OMAHA, NE 68154**  
Tel: (402) 334-1813  
C.E.M

**New Jersey**  
Hewlett-Packard Co.  
120 W. Century Road  
**PARAMUS, NJ 07653**  
Tel: (201) 265-5000  
A.C.C.M.E.M

Hewlett-Packard Co.  
20 New England Av. West  
**PISCATAWAY, NJ 08854**  
Tel: (201) 562-6100  
A.C.C.M.E

**New Mexico**  
Hewlett-Packard Co.  
7801 Jefferson N.E.  
**ALBUQUERQUE, NM 87109**  
Tel: (505) 292-1330  
C.E.M

**New York**  
Hewlett-Packard Co.  
5 Computer Drive South  
**ALBANY, NY 12205**  
Tel: (518) 458-1550  
A.C.E.M

Hewlett-Packard Co.  
9600 Main Street  
**CLARENCE, NY 14031**  
Tel: (716) 759-9621  
C.E

Hewlett-Packard Co.  
200 Cross Keys Office Park  
**FAIRPORT, NY 14450**  
Tel: (716) 223-9950  
A.C.C.M.E.M

Hewlett-Packard Co.  
7641 Henry Clay Blvd  
**LIVERPOOL, NY 13028**  
Tel: (315) 451-1820  
A.C.C.M.E.M

Hewlett-Packard Co.  
No. 1 Pennsylvania Plaza  
55th Floor  
**MANHATTAN, NY 10119**  
Tel: (212) 971-0500  
C.M.\*

Hewlett-Packard Co.  
15 Myers Corner Rd.  
Hollowbrook Park, Suite 20  
**WAPPINGER FALLS, NY 12590**  
C.M.E

Hewlett-Packard Co.  
250 Webster Avenue  
**WHITE PLAINS, NY 10604**  
Tel: (914) 684-6100  
C.M.E

Hewlett-Packard Co.  
3 Crossways Park West  
**WESTPORT, NY 11793**  
Tel: (516) 662-7600  
A.C.C.M.E.M

# SALES & SUPPORT OFFICES

Arranged alphabetically by country



## UNITED STATES (Cont'd)

### North Carolina

Hewlett-Packard Co.  
305 Gregson Dr.  
**CARY, NC 27511**  
Tel: (919) 467-6600  
C.C.M.E.M.P.\*

Hewlett-Packard Co.  
9600-H Southern Pine Blvd.  
**CHARLOTTE, NC 28210**  
Tel: (704) 521-9780  
C\*

Hewlett-Packard Co.  
5505 Roanne Way  
**GREENSBORO, NC 27420**  
Tel: (919) 852-1800  
A.C.C.M.E.M.P.\*

### Ohio

Hewlett-Packard Co.  
2717 S. Atterton Road  
**AKRON, OH 44312**  
Tel: (216) 644-2270  
C.E

Hewlett-Packard Co.  
23200 Chagrin Blvd #100  
**BEACHWOOD, OH 44122**  
Tel: (216) 292-4677  
C.P

Hewlett-Packard Co.  
9920 Carver Road  
**CINCINNATI, OH 45242**  
Tel: (513) 891-9870  
C.M

Hewlett-Packard Co.  
16500 Sprague Road  
**CLEVELAND, OH 44130**  
Tel: (216) 243-7300  
A.C.C.M.E.M

Hewlett-Packard Co.  
9080 Springboro Pike  
**MAIMSBURG, OH 45342**  
Tel: (513) 433-2223  
A.C.C.M.E.\*M

Hewlett-Packard Co.  
One Maxima Plaza, 5th Floor  
720 Water Street  
**TOLEDO, OH 43604**  
Tel: (419) 242-2200  
C

Hewlett-Packard Co.  
675 Brookridge Blvd.  
**WESTERVILLE, OH 43081**  
Tel: (614) 891-3344  
C.C.M.E.\*

### Oklahoma

Hewlett-Packard Co.  
3525 N.W. 56th St.  
Suite C-100  
**OKLAHOMA CITY, OK 73112**  
Tel: (405) 946-9499  
C.E.\*M

Hewlett-Packard Co.  
3840 S. 103rd E. Ave., 100  
**TULSA, OK 74146**  
Tel: (918) 665-3300  
A\*\*C.E.M.P.\*P\*

### Oregon

Hewlett-Packard Co.  
9255 S. W. Pioneer Court  
**WILSONVILLE, OR 97070**  
Tel: (503) 882-8000  
A.C.E.\*M

### Pennsylvania

Hewlett-Packard Co.  
50 Dorchester Rd.  
**HARRISBURG, PA 17112**  
Tel: (717) 637-5900  
C

Hewlett-Packard Co.  
111 Zeta Drive  
**PITTSBURGH, PA 15238**  
Tel: (412) 782-0400  
A.C.E.M

Hewlett-Packard Co.  
2750 Monroe Boulevard  
**VALLEY FORGE, PA 19462**  
Tel: (215) 666-9000  
A.C.C.M.E.M

### South Carolina

Hewlett-Packard Co.  
Brookside Park, Suite 122  
1 Harbor Way  
**COLUMBIA, SC 29210**  
Tel: (803) 732-0400  
C.M

Hewlett-Packard Co.  
555 N. Pleasantburg Dr.  
Suite 107  
**GREENVILLE, SC 29607**  
Tel: (803) 232-6002  
C

### Tennessee

Hewlett-Packard Co.  
One Energy Ctr., 200  
Pallisades Pkwy.  
**KNOXVILLE, TN 37932**  
Tel: (615) 966-4747  
A.C.M

Hewlett-Packard Co.  
3070 Directors Row  
Directors Square  
**MEMPHIS, TN 38131**  
Tel: (901) 246-8370  
A.C.M

Hewlett-Packard Co.  
220 Great Circle Road, Suite 116  
**NASHVILLE, TN 37228**  
Tel: (615) 255-1271  
C.M.P.\*

### Texas

Hewlett-Packard Co.  
1826-P Kramer Lane  
**AUSTIN, TX 78738**  
Tel: (512) 635-6771  
C.E.P\*

Hewlett-Packard Co.  
5700 Orms Dr.  
**EL PASO, TX 79912**  
Tel: (915) 833-4400  
C.E.\*M\*\*

Hewlett-Packard Co.  
3952 Sandshell Drive  
**FORT WORTH, TX 76137**  
Tel: (817) 232-9500  
C

Hewlett-Packard Co.  
10335 Harwin Drive  
**HOUSTON, TX 77036**  
Tel: (713) 776-6400  
A.C.E.M.P.\*

Hewlett-Packard Co.  
511 E. John W. Carpenter Fwy.  
Royal Tech. Center 100  
**IRVING, TX 75062**  
Tel: (214) 556-1950  
C.E

Hewlett-Packard Co.  
109 E. Toronto, Suite 100  
**MALLEN, TX 78603**  
Tel: (512) 630-3030  
C

Hewlett-Packard Co.  
930 E. Campbell Rd.  
**RICHARDSON, TX 75081**  
Tel: (214) 231-6101  
A.C.C.M.E.M.P.\*

Hewlett-Packard Co.  
1020 Central Parkway South  
**SAN ANTONIO, TX 78216**  
Tel: (512) 494-9336  
A.C.E.M.P.\*

### Utah

Hewlett-Packard Co.  
3530 W. 2100 South  
**SALT LAKE CITY, UT 84119**  
Tel: (801) 374-1700  
A.C.E.M

### Virginia

Hewlett-Packard Co.  
4325 Cox Road  
**GLEN ALLEN, VA 23060**  
Tel: (804) 747-7750  
A.C.C.M.E.P.\*

Hewlett-Packard Co.  
Tanglewood West Bldg.  
Suite 240  
3959 Electric Road  
**ROANOKE, VA 24018**  
Tel: (703) 774-3444  
C.E.P

### Washington

Hewlett-Packard Co.  
15815 S.E. 37th Street  
**BELLEVUE, WA 98006**  
Tel: (206) 643-4000  
A.C.C.M.E.M

Hewlett-Packard Co.  
708 North Argonne Road  
**SPOKANE, WA 99212-2793**  
Tel: (509) 922-7000  
C

### West Virginia

Hewlett-Packard Co.  
501 56th  
**CHARLESTON, WV 25304**  
Tel: (304) 925-0492  
A.C.M

### Wisconsin

Hewlett-Packard Co.  
275 N. Corporate Dr.  
**BROOKFIELD, WI 53005**  
Tel: (414) 764-8800  
A.C.E.\*M

### URUGUAY

Pablo Ferrando S.A. e. l.  
Avenida Italia 2677  
Casilla de Correo 370

### MONTEVIDEO

Elekrotretna  
Tirova 51  
YU-1000 LAUBLJANA

### CM

### OLYMPIA DE URUGUAY S.A.

Marques de Olcina

Avda. del Libertador 1997

Casilla de Correo 6644

### MONTEVIDEO

Tel: 91-1809, 99-3807

Telex: 6342 ORJU UY

### P

### VENEZUELA

Hewlett-Packard de Venezuela C.A.

3A Transversal Los Ruices Norte

Edificio Segre 2 & 3

Apartado 50393

**CARACAS 1071**

Tel: 239-4133

Telex: 25 1046 HEWPACK

A.C.C.M.E.M.P

Hewlett-Packard de Venezuela, C.A.

Centro Ciudad Comercial Tamanaco

Nivel C-2 (Nueva Etapa)

Local 53H05

Chusao, **CARACAS**

Tel: 928291

P

Albis Venezolana S.R.L.

Av. Las Marías, Ota. Ailx.

El Pedregal

Apartado 91025

**CARACAS 1080A**

Tel: 747584, 742146

Telex: 24009 ALBIS VC

A

Tecnologica Medica del Caribe, C.A.

Multicentro Empresarial del Este

Ave. Libertador

Egfi. Libertador

Nucleo "C" - Oficina 51-52

**CARACAS**

Tel: 339667/333780

M

### Hewlett-Packard de Venezuela C.A.

Residencias Tia Betty Local 1

Avenida 3 y con calle 75

**MANACABO, Estado Zulia**

Apartado 2646

Tel: (061) 75801-75805-75806-

80304

Telex: 62464 HPMAR

C.E\*

### Hewlett-Packard de Venezuela C.A.

Urb. Lomas de Este

Torre Trebol — Piso 11

**VALENCIA, Estado Carabobo**

Apartado 3347

Tel: (041) 222992/223024

C.P

### YUGOSLAVIA

Do Hermes

General Zdanova 4

YU-11000 BEOGRAD

Tel: 340 327, 342 641

Telex: 31583

A.C.E.P

Hermes

Tirova 50

YU-61000 LAUBLJANA

Tel: 324 856, 324 858

C.E.M.P

Hermes

Tirova 51

YU-1000 LAUBLJANA

CM

### ZAIRE

Computer & Industrial Engineering

25, Avenue de la Justice

B.P. 12737

**KINSHASA, Gombe**

Tel: 21552

C.P

### ZAMBIA

R.J. Tilbury (Zambia) Ltd.

P.O. Box 32792

**LUSAKA**

Tel: 215590

Telex: 40128

E

### ZIMBABWE

Field Technical Sales (Private) Limited

45, Kelvin Road North

P.O. Box 3458

**HARARE**

Tel: 705 231

Telex: 4-122 RH

E.P



