


**National
Semiconductor**
**LM161/LM261/LM361 High Speed Differential
Comparators**

Voltage Comparators

General Description


The LM161/LM261/LM361 is a very high speed differential input, complementary TTL output voltage comparator with improved characteristics over the SE529/NE529 for which it is a pin-for-pin replacement. The device has been optimized for greater speed performance and lower input offset voltage. Typically delay varies only 3 ns for over-drive variations of 5 mV to 500 mV. It may be operated from op amp supplies ($\pm 15V$).

Complementary outputs having minimum skew are provided. Applications involve high speed analog to digital convertors and zero-crossing detectors in disc file systems.


Features

- Independent strobes
- Guaranteed high speed 20 ns max
- Tight delay matching on both outputs
- Complementary TTL outputs
- Operates from op amp supplies $\pm 15V$
- Low speed variation with overdrive variation
- Low input offset voltage
- Versatile supply voltage range


Schematic and Connection Diagrams

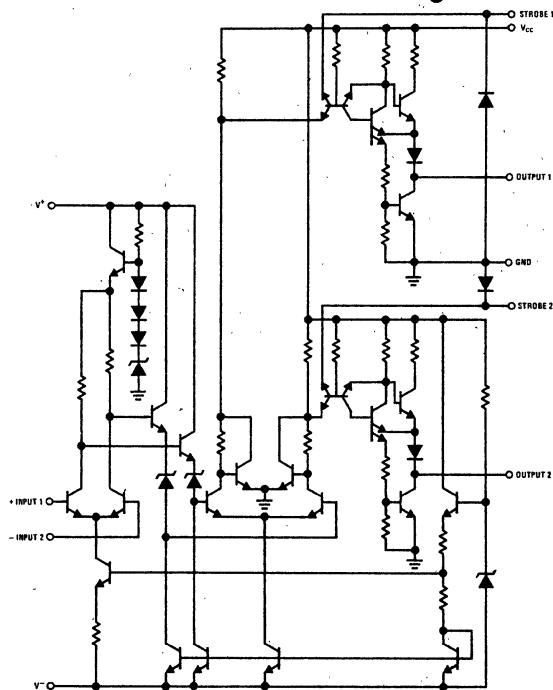

Logic Diagram




Dual-In-Line Package



Order Number LM161J, LM261J
or LM361J
See NS Package J14A

Order Number LM361N
See NS Package N14A

Metal Can Package



Order Number LM161H, LM261H
or LM361H
See NS Package H10C

Absolute Maximum Ratings

| | |
|--------------------------------------|---|
| Positive Supply Voltage, V^+ | +16V |
| Negative Supply Voltage, V^- | -16V |
| Gate Supply Voltage, V_{CC} | +7V |
| Output Voltage | +7V |
| Differential Input Voltage | $\pm 5V$ |
| Input Common Mode Voltage | $\pm 6V$ |
| Power Dissipation | 600 mW |
| Storage Temperature Range | -65°C to +150°C |
| Operating Temperature Range | T_{MIN} LM161 T_{MAX} LM261 LM361 |
| | -55°C to +125°C -25°C to +85°C 0°C to +70°C |
| Lead Temperature (Soldering, 10 sec) | 300°C |

Operating Conditions

| | | MIN | TYP | MAX |
|-------------------------|-------------|-------|-----|------|
| Supply Voltage V^+ | LM161/LM261 | 5V | | 15V |
| Supply Voltage V^- | LM361 | 5V | | 15V |
| Supply Voltage V_{CC} | LM161/LM261 | -6V | | -15V |
| Supply Voltage V_{CC} | LM361 | -6V | | -15V |
| | | | | |
| 4.5V | 5V | 5.5V | | |
| 4.75V | 5V | 5.25V | | |

Electrical Characteristics $(V^+ = +10V, V_{CC} = +5V, V^- = -10V, T_{MIN} \leq T_A \leq T_{MAX}, \text{unless noted})$

| PARAMETER | CONDITIONS | LIMITS | | | | | | UNITS | |
|--|--|-------------|-----|------|-------|-----|------|-----------|--|
| | | LM161/LM261 | | | LM361 | | | | |
| | | MIN | TYP | MAX | MIN | TYP | MAX | | |
| Input Offset Voltage | | | 1 | 3 | | 1 | 5 | mV | |
| Input Bias Current | $T_A = 25^\circ C$ | | 5 | 20 | | 10 | 30 | μA | |
| Input Offset Current | $T_A = 25^\circ C$ | | 2 | 3 | | 2 | 5 | μA | |
| Voltage Gain | $T_A = 25^\circ C$ | | 3 | | | 3 | | V/mV | |
| Input Resistance | $T_A = 25^\circ C, f = 1\text{ kHz}$ | | 20 | | | 20 | | $k\Omega$ | |
| Logical "1" Output Voltage | $V_{CC} = 4.75V, I_{SOURCE} = -5\text{ mA}$ | 2.4 | 3.3 | | 2.4 | 3.3 | | V | |
| Logical "0" Output Voltage | $V_{CC} = 4.75V, I_{SINK} = 6.4\text{ mA}$ | | | .4 | | | .4 | V | |
| Strobe Input "1" Current | $V_{CC} = 5.25V, V_{STROBE} = 2.4V$ | | | 200 | | | 200 | μA | |
| Strobe Input "0" Current | $V_{CC} = 5.25V, V_{STROBE} = .4V$ | | | -1.6 | | | -1.6 | mA | |
| Strobe Input "0" Voltage | $V_{CC} = 4.75V$ | | | .8 | | | .8 | V | |
| Strobe Input "1" Voltage | $V_{CC} = 4.75V$ | 2 | | | 2 | | | V | |
| Output Short Circuit Current | $V_{CC} = 5.25V, V_{OUT} = 0V$ | -18 | | 55 | -18 | | -55 | mA | |
| Supply Current I^+ | $V^+ = 10V, V^- = -10V, V_{CC} = 5.25V, -55^\circ C \leq T_A \leq 125^\circ C$ | | | 4.5 | | | | mA | |
| Supply Current I^+ | $V^+ = 10V, V^- = -10V, V_{CC} = 5.25V, 0^\circ C \leq T_A \leq 70^\circ C$ | | | | | | 5 | mA | |
| Supply Current I^- | $V^+ = 10V, V^- = -10V, V_{CC} = 5.25V, -55^\circ C \leq T_A \leq 125^\circ C$ | | 10 | | | | | mA | |
| Supply Current I^- | $V^+ = 10V, V^- = -10V, V_{CC} = 5.25V, 0^\circ C \leq T_A \leq 70^\circ C$ | | | | | | 10 | mA | |
| Supply Current I_{CC} | $V^+ = 10V, V^- = -10V, V_{CC} = 5.25V, -55^\circ C \leq T_A \leq 125^\circ C$ | | 18 | | | | | mA | |
| Supply Current I_{CC} | $V^+ = 10V, V^- = -10V, V_{CC} = 5.25V, 0^\circ C \leq T_A \leq 70^\circ C$ | | | | | | 20 | mA | |
| TRANSIENT RESPONSE | $V_{IN} = 50\text{ mV Overdrive}$ | | | | | | | | |
| Propagation Delay Time ($t_{pd(0)}$) | $T_A = 25^\circ C$ | | 14 | 20 | | 14 | 20 | ns | |
| Propagation Delay Time ($t_{pd(1)}$) | $T_A = 25^\circ C$ | | 14 | 20 | | 14 | 20 | ns | |
| Delay Between Output A and B | $T_A = 25^\circ C$ | | 2 | 5 | | 2 | 5 | ns | |
| Strobe Delay Time ($t_{pd(0)}$) | $T_A = 25^\circ C$ | | 8 | | | 8 | | ns | |
| Strobe Delay Time ($t_{pd(1)}$) | $T_A = 25^\circ C$ | | 8 | | | 8 | | ns | |

Typical Performance Characteristics

