

MODELS

Compaq UPS R3000 XR

North America / Latin America
Models

192186-001 Low Voltage

192186-002 High Voltage

OVERVIEW

The leading edge Compaq UPS R3000 XR Uninterruptible Power System features the industry's first 2U rackmount design, offering up to 2700 Watts of true power. This new rack-space saving design allows more support for critical rack mountable equipment. This product is a refresh of our existing R3000 UPS, and brings unprecedented power density and innovative features to the proven Compaq family of rack-mountable UPS products.

The new UPS R3000 XR is a high power density solution, designed for customers who want to provide power protection in space-constrained rack enterprise environments. In addition, this new UPS R3000 XR has the capability to be connected to an optional Extended Runtime Module (ERM). Customers can further increase the run-time on their UPS R3000 XR by using this ERM. The Compaq UPS "XR" models denote "eXtended Runtime Capable" UPS models.

KEY FEATURES

- Increased power density with up to 3000VA / 2700 Watts of power packed in just 2U rack space
- Greater system uptime with support for Extended Runtime Module (ERM)
- Easy configuration through enhanced front panel display
- Enterprise-wide intelligent manageability with bundled power management software
- Support for Compaq Option Cards that extend the power management capabilities of the UPS
- More efficient voltage regulation with revolutionary technology
- Ultimate long-term battery reliability with Compaq Enhanced Battery Management
- Enhanced system flexibility with three independently controlled load segments
- Support for Remote Emergency Power Off (REPO) circuitry
- Easy serviceability through modular design
- Hot-Swappable Batteries
- Backed by a limited three-year warranty, Compaq's Pre-Failure warranty, and a \$25,000 load protection guarantee
(Certain restrictions and exclusions apply)

PRODUCT HIGHLIGHTS

2U Power Packed Design

Rated near unity at 3000VA / 2700W, the Compaq UPS R3000 XR packs more power in space-conserving rackmount design, allowing you to support more critical equipment in your rack.

Increase System Uptime with Extended Runtime Modules

The Extended Runtime Modules are rack mounted battery modules that occupy 2U(3.5 inches) of rack space. The Compaq UPS R3000 XR supports one Extended Runtime Module (ERM), which extends your overall battery runtime.

Lower Cost of Ownership with Innovative Technology

The Compaq UPS R3000 XR utilizes a new industry-leading technology that continually conditions and regulates power without using the battery, thereby increasing the life of the battery. The output voltage is automatically regulated, based on the connected load and the input voltage.

Investment Protection with Compaq Enhanced Battery Management

Compaq UPS R3000 XR incorporates Enhanced Battery Management: an exclusive, patented technology that doubles battery service life, optimizes battery recharge time, and provides advance notice of pending battery failure. With Enhanced Battery Management, you have a lower total cost of ownership and receive the best in the industry protection for your critical equipment.

Enhanced System Flexibility with Compaq Option Cards

The UPS R3000 XR models are equipped with a standard serial communications port via an internal slot. This option slot supports two option cards, the Six Port Card and the SNMP / Serial Port Card. These option cards seamlessly integrate into the back of the R3000 XR and provide increased system flexibility.


PRODUCT HIGHLIGHTS *(continued)*

Remotely Monitor UPSs on the Network

The SNMP / Serial Port Card features the ability to perform simultaneous network and out-of-band communications. It enables network administrators to remotely monitor UPSs and reboot network devices. It provides SNMP functionality, including power event alerts, network power diagnostics, and remote UPS reboot and testing. Used in conjunction with the provided Online power management software or SNMP capable Network Management Software, power-related problems on the network are quickly discovered and remedied.

Easy Configuration via Enhanced Front Panel Display

LED and switch membrane integrated into the front panel with four button controls (three buttons for UPS power control and one button under the front bezel for configuration)

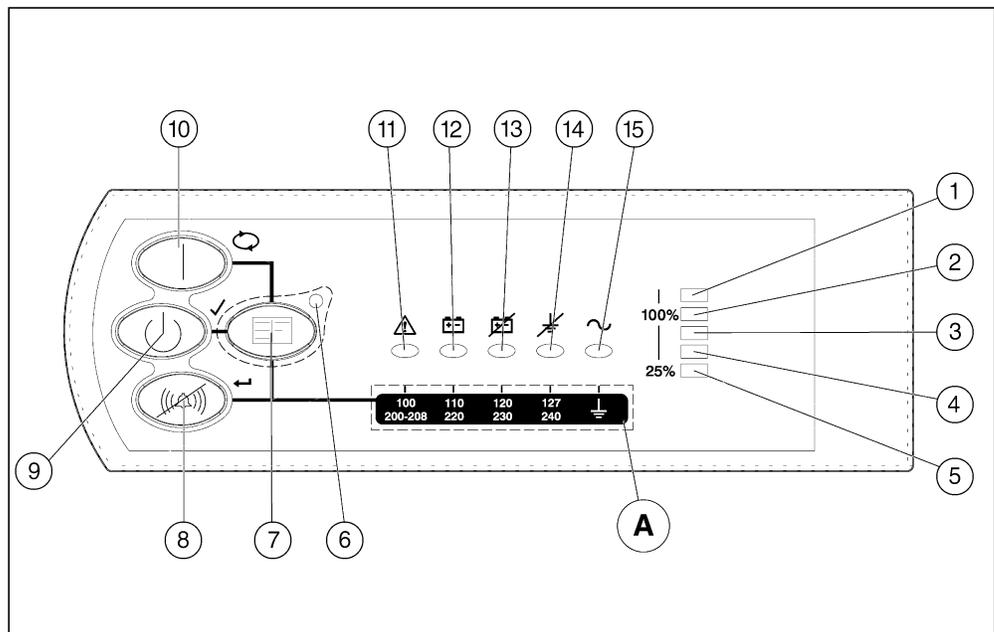

- | | |
|---|---------------------------------|
| 1. LED indicating Overload capacity | 9. STANDBY Button |
| 2. LED indicating 76% to 100% load capacity | 10. ON Button |
| 3. LED indicating 51% to 75% load capacity | 11. General Alarm |
| 4. LED indicating 26% to 50% load capacity | 12. On Battery |
| 5. LED indicating 0% to 25% load capacity | 13. Bad Battery / Low Battery |
| 6. Configure mode on LED* | 14. Site Wiring Fault Indicator |
| 7. Configure Button* | 15. Utility LED |
| 8. TEST/ALARM RESET Button | A. Voltage Configuration Panel* |
- * Accessible only when the front bezel is removed


PRODUCT HIGHLIGHTS *(continued)*

Intelligent Manageability

Compaq Power Management Software, an integrated component of Compaq Insight Manager, the industry-leading hardware management platform, is included with the Compaq UPS R3000 XR models. The Compaq Power Management Software enables you to monitor and control Compaq UPSs locally or remotely. This software is a versatile, fully configurable, alert response tool that gives system administrators a full overview of the network's conditions. It enables you to monitor system status and power conditions, configure shut down timing, customize alert messages, and perform UPS diagnostic checks quickly and easily.

Independently Controllable Load Segments

With three load segments, you have the flexibility to configure scheduled startups and shutdowns, in addition to independently control the separate load segments. Working in conjunction with Compaq Power Management Software, the Compaq UPS R3000 XR can be configured to extend the runtime for more critical devices.

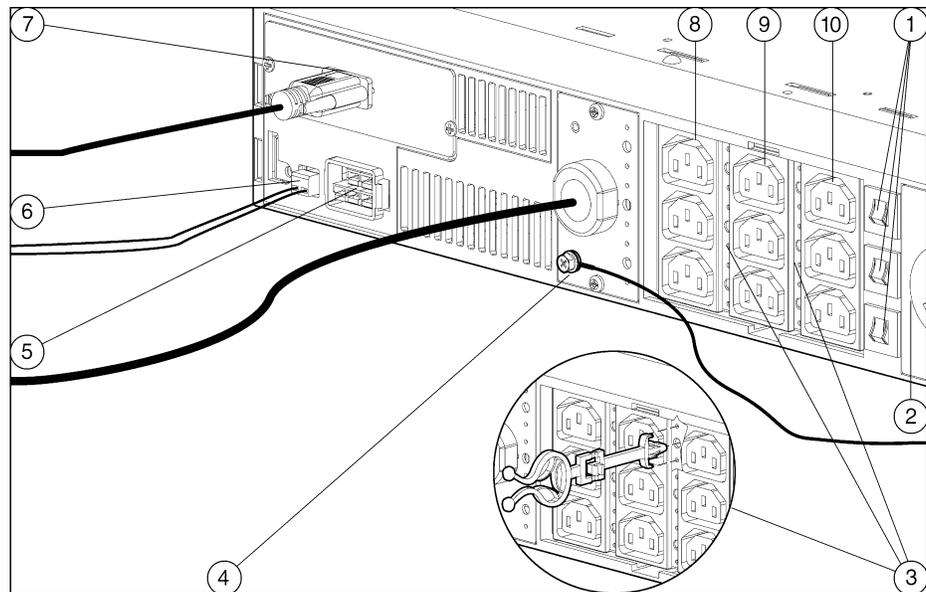

- | | |
|---|------------------------------------|
| 1. Load Segment Circuit Protectors | 6. REPO Port |
| 2. Compaq PDU output receptacle* | 7. Communications Port/Option Slot |
| 3. Cord retention clip attachment locations | 8. Load Segment 1 |
| 4. Ground bonding screw | 9. Load Segment 2 |
| 5. ERM Connector | 10. Load Segment 3 |

Ease of Maintenance with Hot-Swappable Batteries and Electronics Modules

The UPS R3000 XR is modular in design, and both the battery and the electronics modules are hot swappable. Compaq UPSs are designed with simple access through the front panel. Users can safely install new batteries and even the electronics module without ever powering down connected server and server options.

Compaq Quality

Compaq's hardware qualification is the toughest in the industry. Extensive evaluation, testing, product improvement, and an unsurpassed warranty guarantee the highest level of system protection, electrical performance, product quality and compatibility.

Warranty

The Compaq UPS R3000 XR is covered by a three year, limited warranty. Also, standard on all Compaq UPS units, is our exclusive Pre-Failure Warranty which extends the advantage of a Compaq three-year, limited warranty by applying it to the battery before it actually fails. This warranty is offered worldwide. Specifically, the Pre-Failure Battery Warranty ensures that when customers receive notification from Compaq Power Management Software that the battery may fail, the battery is replaced free of charge under the warranty.

Note: \$25,000 Computer/Load Protection Guarantee is also provided, in addition to the Compaq three year, limited warranty.

SERVICE & SUPPORT, CAREPAQ AND WARRANTY INFORMATION

Software Product Services

- Stand-alone telephone support
- Rights to new license version
- Media and documentation updates

Hardware Product Services

- Installation services
- On-site maintenance (includes warranty support)
- Response time upgrades during the warranty period
- Post-warranty coverage
- RAID setup and performance consulting via statement of work

For additional hardware installation and maintenance information, please refer to the URLs listed below:

http://www.compaq.com/services/hardware/hw_installation.html

http://www.compaq.com/services/hardware/hw_maintenance.html

Please note that these Web sites are available in English only.

Warranty Upgrade Options

- Response – Upgrade on-site response from next business day to same day 4 hours
- Coverage – Extend hours of coverage from 5 days x 9 hours to 7 days x 24 hours
- Duration – Select duration of coverage for a period of 1, 3, or 5 years

CarePAQ Information

Sample part numbers:

- FM-**XHW-36, 3 year, uplift to 5 x 9, Next Day Response
- FM-**4HR-36, 3 year, uplift to 5 x 9, 4-hour Response
- FM-**724-36, 3 year, uplift to 7 x 24, 4-hour Response

** represents a two-digit, product-specific code

- CarePAQ is defined as an upgrade to the product warranty attribute, available for a specific duration and hours of coverage.
- CarePAQ is not available for less than the product's warranty duration.
- CarePAQ is available for sale anytime during the warranty period for most products, but the commencement date will be the same as the Warranty Start Date (delivery date to end user customer). Proof of purchase may be required.
- CarePAQ services are prepaid.

For additional CarePAQ (hardware & software) information, as well as orderable part numbers, please refer to the URL listed below:

<http://www.compaq.com/services/carepaq/index.html>

Please note that this Web site is available in English only.

Components

The following brick-level options/components do not have individual CarePAQs. These items will be included in product CarePAQs into which they are installed.

Disk Drives	Tape Drives	CD/DVD ROM	SCSI Hubs in SBBs	Adapters
Bus Converters	Backplane RAID Controllers	Power supplies/UPS	Cabling	Fans

INNOVATIVE OPTIONS TO MEET YOUR DATA CENTER NEEDS

New Optional SNMP / Serial Port Card	192189-B21 UPC 720591442125	Ideal for networked environments, this option card enables network administrators to remotely diagnose, monitor and reboot network devices via SNMP.
New Optional Six Port Card	192185-B21 UPC 720591441951	This option card lets you communicate (via standard DB-9 serial ports) with up to three servers or two additional UPS devices. It supports multiple operating systems for heterogeneous environments.
New Extended Runtime Module	192188-B21 UPC 720591442118	The new Compaq UPS R3000 XR supports one 2U (3.5 inches) Extended Runtime Module, a rack mountable dual battery module that extends your overall battery runtime.

UPS R3000 XR MODEL SELECTION MATRIX

Part Number	Operating Voltage Settings	Power Out (VA/ Watts)	Input Connection	Output Connection
Low-Voltage Models				
192186-001 UPC 720591441968	120V ¹	2880 / 2700	NEMA L5-30P	(1)L5-30R; (6) 5-15R
High-Voltage Models				
192186-002 UPC 720591522865	208V ²	3000 / 2700	NEMA L6-20P	(1) L6-20R; (9) IEC 320-C13

***Note:** This model with the detachable cord can be used only in applications where the total leakage current is less than 3.5 mA.

Kit Contents

Compaq UPS R3000 XR
Compaq Power Management Software CD
Power Products Documentation CD
Depth adjustable fixed rack mounting rails, mounting brackets, cord retention clips
Communications cable
Additional IEC to IEC jumper cords with high voltage models

Unit Dimensions

3.50 x 19.0 x 24.5 in / 89 x 483 x 622 mm

Shipping Dimensions

14 x 32 x 38.5 in / 356 x 813 x 978mm

Unit Weight

82 lbs/37 kg

Shipping Weight

105 lbs/48 kg

1. User selectable for 100, 110, 120, 127V via front panel

2. User selectable for 200, 208, 220, 230, 240V via front panel

COMPAQ UPS R3000 XR SPECIFICATIONS

Electrical Input

Voltage Range	100, 120, 208, and 230V models. See Model Selection Matrix for nominal and user selectable voltage settings
Frequency	50/60 Hz
Connection	See Model Selection Matrix
Online Efficiency	96%
Surge Suppression	High Energy 6500A peak
REPO	Remote Emergency Power-Off disables AC power to load

Electrical Output

Online Regulation	-10% to +6% of nominal voltage
On battery Regulation	±5% of nominal voltage
Voltage Wave Form	Sine wave
Connections	See Model Selection Matrix; divided into 3 Load Segments
Output Protection	Re-settable circuit protectors

Battery

Type	Maintenance-free, sealed, valve-regulated lead acid (VRLA)
Extended Batteries	One ERM with two battery strings
Backup Time	See Backup Times Chart
Recharge Time	<3 hours to 80% usable capacity; <24 hours for complete recharge

Communications

Serial Ports	Standard DB-9 ports (ships with communication cable)
Option Cards	Six Port Card and SNMP / Serial Port Card
LED Indicators	LED and switch membrane integrated into the front panel; with four-button control (three buttons for UPS power control and one button under the front bezel for configuration).

Environmental and Safety

Operating Temperature	50°F to 104°F / 10°C to 40°C
Transit Temperature	-13°F to 131°F / -25°C to 55°C
Storage Temperature	32°F to 77°F / 0°C to 25°C
Humidity (Operation)	20% to 80% (non-condensing)
Humidity (Non-operating)	5% to 95%
Operating Altitude	Up to 6,562 ft/2000m above sea level
Transit Altitude	49,212 ft/15,000m above sea level
Safety Markings	FCS, UL, CSA, VDE, NEMKO, FIMKO, DEMKO, SEMKO, NOM
Safety Certifications	UL1778; CSA22.2 No.107.1, No.107.2, No.950; CB Bulletin No.86A1; EN50091-1; EN60950; EMKO-TSE207/95; NOM-019-SCFI-1993
EMC Markings	FCC; CISPR; VCCI; CE
Emissions	FCC CFR 47, Part 15 Class A, EN50091-2
Immunity	IEC 801-2, IEC 801-3, IEC 801-4, IEC 801-5
Surge Suppression	Conforms to IEEE 587B and ANSI C62.41
REPO Port	Meets NEC code 645-11 intent and UL requirements

ESTIMATED BACKUP TIMES CHART

Load (Percent*)	With Standard Battery (Minutes)	With Extended Runtime Module (Minutes)
20	40	120
50	12	45
80	6.5	30
100	5	20

*Note: Percent of 3000VA or 2700W of load

Note: Backup times are estimated for typical applications. Actual performance will depend on load and battery conditions.

COMPATIBILITY

Compatible with all Compaq servers, storage, racks, rack options, and other rackmountable Compaq equipment.