

COMPAQ

9000 Series Rack Short Rear Door Option Kit

Installation Instructions



[View Guide](#)

NOTICE

The information in this publication is subject to change without notice.

COMPAQ COMPUTER CORPORATION SHALL NOT BE LIABLE FOR TECHNICAL OR EDITORIAL ERRORS OR OMISSIONS CONTAINED HEREIN, NOR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS MATERIAL. THIS INFORMATION IS PROVIDED "AS IS" AND COMPAQ COMPUTER CORPORATION DISCLAIMS ANY WARRANTIES, EXPRESS, IMPLIED OR STATUTORY AND EXPRESSLY DISCLAIMS THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, GOOD TITLE AND AGAINST INFRINGEMENT.

This publication contains information protected by copyright. No part of this publication may be photocopied or reproduced in any form without prior written consent from Compaq Computer Corporation.

© 2000 Compaq Computer Corporation
All rights reserved. Printed in the U.S.A.

Compaq, Registered U.S. Patent and Trademark Office.

Compaq 9000 Series Rack Short Rear Door Option Kit

First Edition (September 2000)
Part Number 221403-021

Compaq Computer Corporation



221403-021

About This Device

The Compaq 9000 Series Rack Short Rear Door Option Kit provides a 4U (seven-inch) opening at the bottom rear of the rack.

Kit Contents

Below are the items and quantities required for assembly:

- Short Rear Door (1)

Rack Considerations

Before beginning these procedures, make sure you understand and follow these precautions:



WARNING: To reduce the risk of personal injury or damage to the equipment, be sure that:

The leveling jacks are extended to the floor.

The full weight of the rack rests on the leveling jacks.

The stabilizing feet are attached to the rack, if it is a single-rack installation.


The racks are coupled in multiple-rack installations.

Only one component is extended at a time. (A rack may become unstable if more than one component is extended for any reason.)

Installation


Step 1

Open the four hinge brackets on the rear of the rack to release the existing door. Pull the top hinge bracket pin up and the lower hinge bracket pin down.

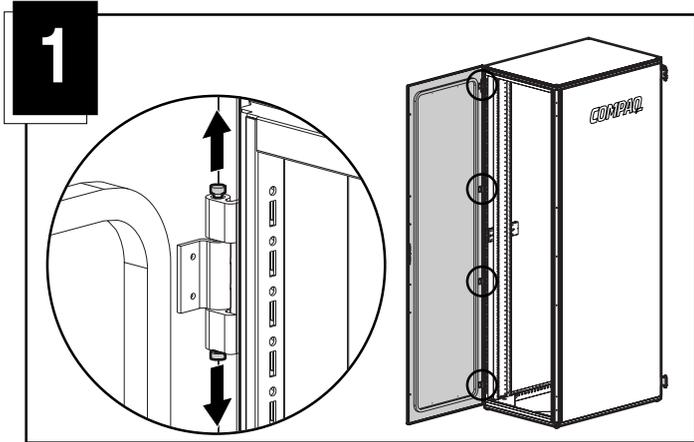


Step 2

Lift the door away from the rack. Place the door in an upright position, taking care to protect from damage.

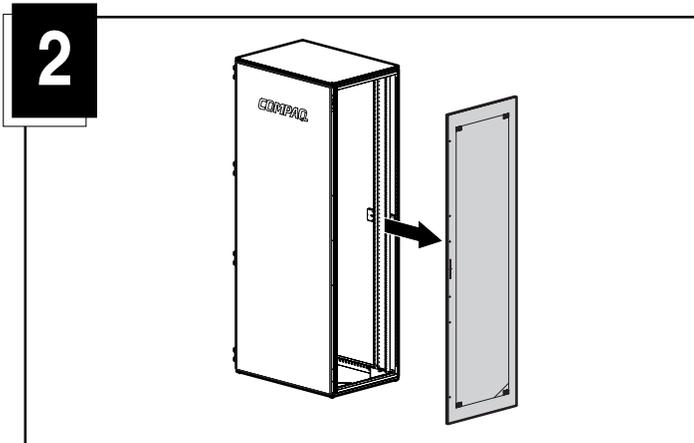


Step 3

Attach the short rear door by inserting the hinges on the door into the hinge brackets located on the rear of the rack. Secure the hinges by closing the hinge brackets.

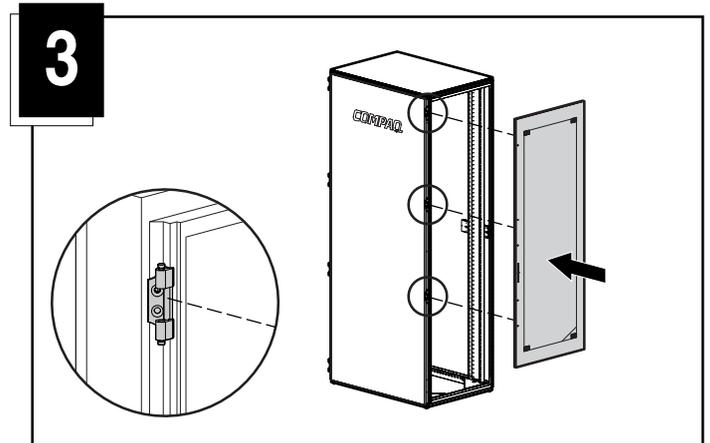

NOTE: The fourth hinge may be left on the rack or removed and stored for future use.

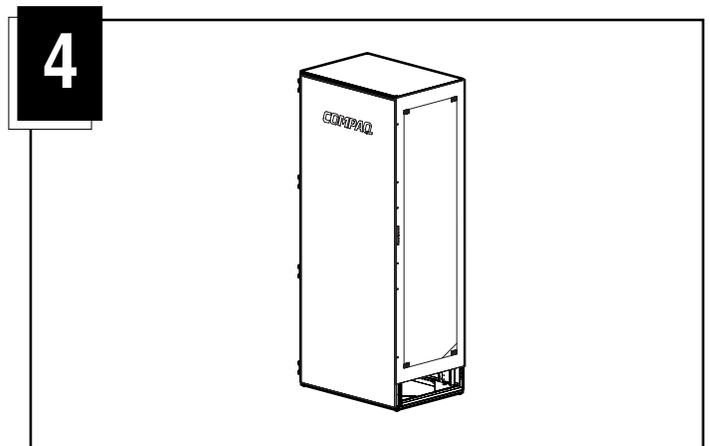

Installation is complete.