


# Premiere/PCI LPX Low Profile Jumpers

## PLEASE NOTE

This product is no longer being manufactured by Intel. THIS DOCUMENT IS PROVIDED FOR HISTORICAL REFERENCE PURPOSES ONLY AND IS SUBJECT TO THE TERMS SET FORTH IN THE "LEGAL INFORMATION" LINK ON THE INTEL WEBSITE. For information on currently available Intel products, please see <http://www.intel.com> and/or <http://developer.intel.com>

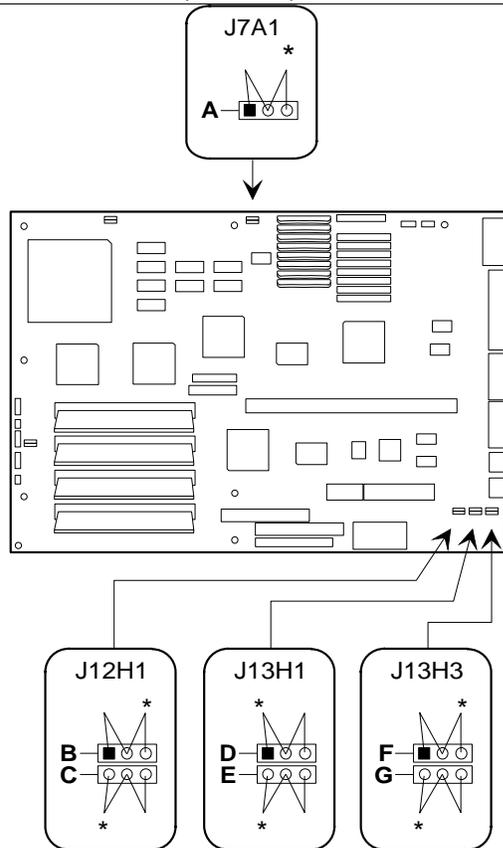

OM02637B

Figure B-1. Jumper locations and settings (\*denotes default setting)

<i>Function</i>	<i>Location</i>	<i>Jumper Block</i>	<i>Default</i>
Reserved. This jumper is set at the factory. The board may not function correctly if this jumper is moved.	J7A1	A	60
Flash normal/flash recovery: allows recovery of the BIOS, if the BIOS is corrupted during an upgrade.	J12H1	B	Flash normal
Enable/disable flash updates: allows upgrading the BIOS stored in the flash EEPROM.	J12H1	C	Disable flash updates
Clear/don't clear CMOS: allows CMOS to be reset to factory-default settings.	J13H1	D	Don't reset CMOS to defaults
Clear/don't clear password: allows the BIOS password to be overridden.	J13H1	E	Don't clear password
Monochrome/color video mode	J13H3	F	Color
Enable/disable entry into Setup program: allows user to disable entry into the Setup program at boot-up.	J13H3	G	Enable entry into Setup

Table B-1. System Board Jumper Default Settings