

Installing Memory on the Intel® Server Board SE7500CW2


The server board supports only DDR 200/266 compliant DIMMs. DIMMs must be installed in pairs. The furthest DIMM pair from the MCH must be populated first. (see figure below)

It is labeled on the board as :

Memory DIMM	Bank
J39 (DIMM 1B), J40 (DIMM 1A)	1
J37 (DIMM 2B), J38 (DIMM 2A)	2

No DIMM mixing is allowed within a bank. Between memory banks , only the DIMM size may be different. All DIMMs must be the same speed and architecture.

For a list of tested memory, please go download the tested memory list [here](#).

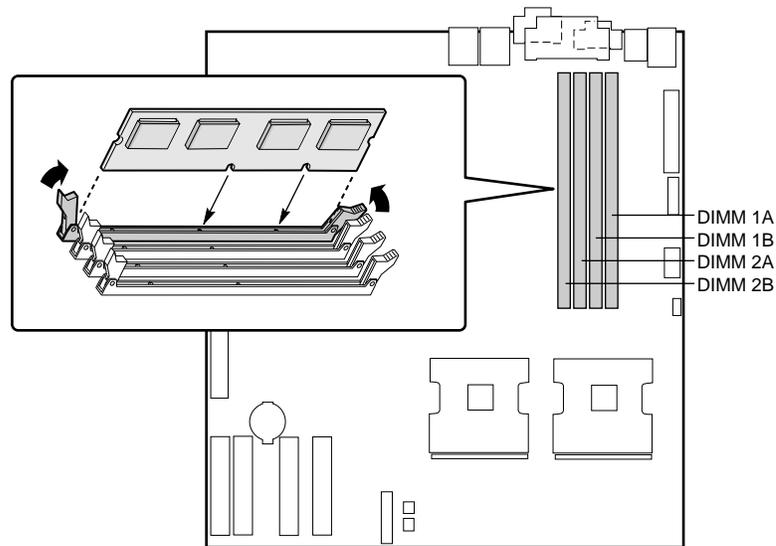

OM14194

Installing Memory