

CONTENTS

INDEX PERFORMANCE SPECIFICATION

1.0 Boot Straps

2.0 Programs

- A. PACK
- B. NEW
- C. COPY
- D. CALL
- E. SET
- F. MTLD
- G. DPTT
- H. LPFT

INTRODUCTION

The function of the AUTOMATIC LOAD and DUMP (ALD) is to load 8092B core from magnetic tape or dump 8092B core to a magnetic tape.

When programs or files are being transferred from magnetic tape and 8092B core, the transferring of the words is done by banks and will always start with the word zero of bank zero. The banks will be in consecutive order until either the end of file mark is detected from the magnetic tape, or the last bank (which was indicated for the dumping of the 8092B core) has been reached. The transfer shall not exceed 14 banks of core.

ALD will have the following capabilities:

1. Set up a library of programs or files on the magnetic tapes. Up to 15 files (17 octal) may be recorded on one magnetic tape.
2. Update specific programs or files on the magnetic tape.
3. Add new programs or files to the magnetic tape.
4. Call specific programs or files to be loaded into 8092B core from the magnetic tape.
5. Verify the accuracy of transfers between the magnetic tape and 8092B core.

1. Boot Strap

The first file on tape is the boot strap, which has three records.

- A. Record one, BOOTAH and BOOTA
- B. Record two, BOOTBH and BOOTB
- C. Record three, BOOTCH and BOOTC

1.0 BOOT STRAP

A. BOOTAH, BOOTA

The first 45 frames of this record are 6 bit words making up program BOOTAH. The remaining frames of this record are 4-bit words.

When loaded into core this record has the following capability:

The first 45 locations become a program of 6-bit instructions which when executed, assembles an 8-bit program called BOOTA. BOOTA is then executed and assembles the balance of the record, (which are programs COPY and CALL) and stores them in bank 13 starting with word zero.

B. BOOTBH, BOOTB

The first 45 frames of this record are 6-bit words making up program BOOTBH. The remaining frames of this record are 4-bit words.

When loaded into core this record has the following capability:

The first 45 locations become a program of 6-bit instructions which when executed, assembles an 8-bit program called BOOTB. BOOTB is then executed and assembles the balance of the record, (which are programs SET and MTLD) and stores them in bank 14 starting with word zero.

C. BOOTCH, BOOTC

The first 45 frames of this record are 6-bit words making up program BOOTCH. The remaining frames of this record are 4-bit words.

When loaded into core this record has the following capability:

The first 45 locations become a program of 6-bit instructions which when executed, assembles an 8-bit program called BOOTC. BOOTC is then executed and assembles the balance of the record, (which are programs LPFT and DPTT) and stores them in bank 15 starting with word zero.

2. Program

The following descriptions are for the programs which run in the 8090, or the 160A computer:

A. PACK

This program will generate the boot strap for the Automatic Load and Dump Tape for the 8092 Computer.

Its function is to write three magnetic tape records, end of file mark and code mark (octal 77) in binary and low density. It checks for errors after each record.

The records in this file are:

Record 1 = BOOTAH and BOOTA

Record 2 = BOOTBH and BOOTB

Record 3 = BOOTCH and BOOTC

B. NEW

Its function is to add a new file onto the "Magnetic Automatic Load and Dump Tape".

When programs for the 8092B Teleprogrammer have been assembled by OSAS-A, the binary paper tape output may be loaded into the 8090 or the 160A computer, transferred to the "Magnetic Automatic Load and Dump Tape".

The routine will assign a file number to show the file location on the "Magnetic Automatic Load and Dump Tape".

Continuation

These are the programs which run in the 8092B Teleprogrammer

C. COPY

This program copies the first file from AUTOMATIC LOAD and DUMP TAPE.

This file is the BOOT STRAP. (The BOOT STRAP is not considered as a file number on this tape.) There are three records to this file.

Record 1 is known as BOOTAH and BOOTA

Record 2 is known as BOOTBH and BOOTB

Record 3 is known as BOOTCH and BOOTC

COPY can output records 1, 2, and 3 on the new tape, write end of file mark, and code mark (an octal 77) which identifies the last file on the AUTOMATIC LOAD and DUMP TAPE.

D. CALL

This program loads the 8092B core starting with word zero of bank zero with the remaining two records of the BOOT STRAP file.

Record one of this file is loaded by the Teleprogrammers load and run switches. When record one is assembled program CALL is stored into bank 13.

CALL will then load 8092B core with record two of the file. Record two is then assembled and stores its programs in bank 14. Record three of the file is then loaded, assembled, and stores its programs in bank 15. CALL then comes to a halt.

Programs are now loaded in their proper banks and ready to perform any job assignment such as:

Dumping 8092B core to the Automatic Load and Dump Tape.

Loading 8092B core from Automatic Load and Dump Tape.

Copying the Boot Strap from the Automatic Load and Dump Tape
on a new Automatic Load and Dump Tape.

E. SET

This program checks for the job assignment. If the job assignment is dumping SET will: a) determine if file to be dumped updates an existing

Continuation

file and set up the number of the file to be updated b) determine if the file to be dumped is a new file to be added to the tape.

If the job assignment is loading, SET will determine the number of the file on magnetic tape to be loaded. SET will initialize all control words, fix program MTLD to either read or write, and exit to programs LPFT or DPTT depending on the job assignment.

F. MTLD

This program will read or write in binary and low density variable length records up to 102 characters over the normal channel. The characters are read into or written from a common input/output area. It checks for parity errors after each record transfer, if an error exists, it will try five times for that record. If the error persists MTLD will come to a halt to indicate the error. When dumping 8092B core on the Automatic Load and Dump Tape the file number will be displayed after completion of the dump in the A register.

When loading a file from the Automatic Load and Dump Tape into the 8092B core, MTLD will compare check sums for the verification of the loading. When complete file is loaded MTLD will come to a halt. The contents of the A register will display the following:

Zero in the A register, the file was loaded correctly

Non Zero in the A register, the file was loaded incorrectly.

G. DPTT

This program prepares the 8092B core for output to the Automatic Load and Dump Tape starting with word zero of bank zero.

Each word to be outputted is added to a check sum counter and then processed as follows:

The word is divided into two 4-bit words with the high order 4-bits being identified. The two 4-bit words are then stored into the input/output area. When the input/output area has reached 102 words, DPTT releases control to MTLD.

Continuation

After processing the last word, the check sum is processed in the same manner. The check sum then becomes the last two words of this record, which will be less than 102 words.

H. LPFT

This program assembles the words in the input/output area which were inputted by the Program MTLD from the Automatic Load and Dump Tape.

The input/output area is filled with 4-bit words.

Two 4-bit words are combined to one eight bit word, checksummed, then stored in 8092B core starting with word zero of bank zero, the store address is then incremented by one. When the storing is completed, LPFT releases control to MTLD. This process will continue until MTLD detects an end of file mark on the Automatic Load and Dump Tape.

OPERATIONAL SPECIFICATION

MAGNETIC "AUTOMATIC LOAD AND DUMP TAPE"

FOR THE

8090 OR THE 160-A COMPUTER

INDEX

- 1. HARDWARE REQUIRED**
- 2. RESTRICTIONS**
- 3. GENERATE A MAGNETIC "AUTOMATIC LOAD AND DUMP TAPE"**
- 4. ADD A FILE TO THE MAGNETIC "AUTOMATIC LOAD AND DUMP TAPE".**

I. HARDWARE REQUIRED

- A. The 8090 computer with a 603 Tape Drive using the 8071 synchronizer, or the 160A computer with a 603 Tape Drive using the 162 synchronizer.

2. RESTRICTIONS

- A. When a new file is to be added to the magnetic "Automatic Load and Dump Tape", the starting point for the output will always be memory location zero, and will be by multiples of 400 memory locations.
- B. The dumping of the new file should not exceed memory location (7000).

3. GENERATE A MAGNETIC "AUTOMATIC LOAD AND DUMP TAPE"

- a. Mount the magnetic tape that is to be an "Automatic Load and Dump Tape" on tape drive 3. Set tape drive 3 to LOW DENSITY and in a ready state with the magnetic tape at LOAD point.
- b. MASTER CLEAR computer, and ZERO out memory locations.
- c. Turn the paper tape reader on, set to read in 7 level paper tape. Put the paper tape that is marked "PACK" into the paper tape reader. Enter manually "⁷²⁷⁰7300" in the P-REGISTER. Put the LOAD switch into the up position, then the RUN switch into the up position. The computer will come to a halt with the following information in the REGISTERS:

P = 7715, A = 0000, Z = 0000

Return the RUN and LOAD switches to the normal (center) position.

- d. MASTER CLEAR computer

Enter, manually "⁷²⁷⁰7300" in the P-REGISTER. Put the RUN switch into the up position. The computer will come to a halt with the following information in the REGISTERS:

P = 7543, A = 0060, Z = 7700

Return the RUN switch to the normal (center) position.

- e. MASTER CLEAR computer

Enter, manually "⁷²⁷⁰7300" in the P-REGISTER. Put the RUN switch into the up position. The computer will come to a halt with the following information in the REGISTERS:

P = 7543, A = 0000, Z = 7700

Return the RUN switch to the normal (center) position.

f. MASTER CLEAR computer.

Entry, manually "7000" in the P-REGISTER. Put the RUN switch into the up position. The computer will come to a halt with the following information in the REGISTERS:

P = 7244, A = , Z = 7700

Return the RUN switch to the normal (center) position.

- g. The magnetic tape on tape 3 is now a magnetic "Automatic Load and Dump Tape". The only file on the tape is the BOOT-STRAP, which is a self storing program.
h. ERROR STOPS

Return the RUN switch to the normal (center) position.

1. P = 7116, A = 0002, Z = 7700

REASON: Tape Drive 3 is not ready.

RECOVERY: Correct the condition of tape drive 3. Put the RUN switch into the up position.

2. P = 7160, A = 7777, Z = 7700

REASON: Parity error detected on five successive attempts to write.

RECOVERY: Restart with step 3a (above), and use a different magnetic tape in step 3a.

- I. If the computer stops and none of the error stops described above appear, restart beginning at step 3a (above).

4. ADD A FILE TO THE MAGNETIC "AUTOMATIC LOAD AND DUMP TAPE".

- a. Mount the magnetic "Automatic Load and Dump Tape" on tape drive 3.
Set tape drive 3 to LOW DENSITY and in a ready state with the magnetic tape at LOAD point.
- b. MASTER CLEAR computer, and ZERO out memory locations.
- c. Turn the paper tape reader on, set to read in 7 level paper tape. Put the paper tape that is marked NEW into the paper tape reader. Enter, manually ⁷²⁷⁰ "7900" in the P-REGISTER. Put the LOAD switch into the up position, then the RUN switch into the up position. The computer will come to a halt with the following information in the REGISTERS:

P = 7715, A = 0000, Z = 0000

Return the LOAD and RUN switches to the normal (center) position.

- d. MASTER CLEAR computer

Enter, manually ⁷²⁷⁰ "7900" in the P-REGISTER. Put the RUN switch into the up position. The computer will come to a halt with the following information in the REGISTERS:

P = 7543, A = 0000, Z = 77000

Return the RUN switch to the normal (center) position.

- e. Remove the paper tape (NEW) from the paper tape reader. Insert the binary paper tape which was created by the OSAS-A assembly in the paper tape reader. Enter, manually ⁷²⁷⁰ "7000" in the P-REGISTER. Put the RUN switch into the up position. The computer will come to a halt with the following information in the REGISTERS:

P = 7543, A = 0000, Z = 7700

Return the RUN switch to the normal (center) position.

- f. Enter, manually "7000" in the P-REGISTER. Enter manually the last address to be dumped on the magnetic tape into the A-REGISTER.

NOTE: The first word to be dumped is memory location zero. Put the RUN switch into the up position. The computer will come to a halt with the following information in the REGISTER:

P = 7266, A = FILE-NUMBER, Z = 5000

Return the RUN switch to the normal (center) position.

The A-REGISTER will then contain the file number for the file just dumped on the "Automatic Load and Dump Tape".

G. ERROR STOPS

Return the RUN switch to the normal (center) position.

1. P = 7014, A = 0077 ~ 0000, Z = 7700

REASON: If the A-REGISTER equals "0077", the program to be added is too large (exceeds 7000) for dumping. If the A-REGISTER equals "0000", the last memory address location for dumping was not entered.

RECOVERY: A-REGISTER equals (0077). NONE

A-REGISTER equals (0000). Enter, manually the last memory address location for dumping. Put the RUN switch into the up position.

2. P = 7055, A = 0002, Z = 7700

P = 7203, A = 0002, Z = 7700

P = 7226, A = 0002, Z = 7700

REASON: Tape unit 3 is not ready.

RECOVERY: Correct the conditions of tape unit 3, put the RUN switch into the up position.

3. P = 7102, A = 0020, Z = 7700

REASON: The "Automatic Load and Dump Tape" already has 17 octal files recorded.

RECOVERY: Restart with step 4a (above) and use a different Automatic Load and Dump Tape in step 4a (above).

4. P = 7137, A = 0006, Z = 7700

REASON: Parity error detected on five successive attempts to write.

RECOVERY: Restart with step 4a (above) and use a different "Automatic Load and Dump Tape" in step 4a (above).

H. If the computer stops and none of the error stops described above appear, restart beginning at step 4a (above).

OPERATIONAL SPECIFICATION

MAGNETIC AUTOMATIC LOAD AND DUMP TAPE

FOR THE

8092B TELEPROGRAMMER

INDEX

1. Hardware Required
2. Restrictions
3. Generating a new Magnetic Automatic Load and Dump Tape "BOOT STRAP ONLY"
4. Loading a program or file from the Magnetic Load and Dump Tape to the 8092B Core
5. Dumping a program or file from the 8092B Core to the Magnetic Automatic Load and Dump Tape.

1. Hardware Required

- a. One 8092B Teleprogrammer
- b. 601 Magnetic Tape Drive with a 8193 synchronizer or,
603 Magnetic Tape Drive with a 8093B synchronizer

2. Restrictions

- a. When a program or file is to be transferred from the Magnetic Automatic Load and Dump Tape, and 8092B core, the following will always be true:
 - 1. They start with word zero of bank zero
 - 2. The transferring is done by banks
 - 3. The banks are in consecutive order
 - 4. The maximum bank is bank 14
- b. The Magnetic Automatic Load and Dump Tape shall not exceed 15 (17 octal) files
- c. When a specific program or file is to be updated, the file size must not be altered

3. Generating a new "Magnetic Automatic Load and Dump Tape" (BOOTSTRAP ONLY).

- a. Mount the "Magnetic Automatic Load and Dump Tape" on tape drive 3. Set tape drive 3 to a ready state with the magnetic tape at load point.

b. Master Clear 8092B computer

Put the LOAD switch into the up position, then the RUN switch into the up position. One record will be read from the magnetic tape on tape drive 3. The computer will come to a halt with the following information in the registers

P = 1401 OR 1403, A = 377, Z = 0.

Return the LOAD and RUN switches to the normal (center) position.

c. MASTER CLEAR 8092B Computer

Put the RUN switch into the up position. Computer will come to a halt with the following information in the registers.

P = 6716, A = 0, Z = 077.

Return the RUN switch to the normal (center) position.

d. Enter, manually "360" in the A-REGISTER.

Put the RUN switch into the up position. Computer will come to a halt with the following information in the registers

P = 6561, A = 377, Z = 077

Return the RUN switch to the normal (center) position.

e. Mount the magnetic tape that is to be the new "Magnetic Automatic Load and Dump Tape" on tape drive 3.

Put the RUN switch into the up position. Computer will come to a halt with the following information in the registers.

P = 6605, A = 0, Z = 077

Return the RUN switch to the normal (center) position.

f. The magnetic tape on tape drive 3 is now a "Magnetic Automatic Load and Dump Tape". The only file on the tape is the BOOT STRAP, which is a self storing program.

g. ERROR STOPS

Return the RUN switch to normal (center) position.

1. P = 6421, A = 002, Z = 077

Tape drive 3 is not in ready state. Correct the condition and put the RUN switch into the up position.

2. P = 6510, A = 000, Z = 077

Parity error detected on five successive attempts to read or write

- a. If error occurs on read, the automatic load and dump tape may be bad. In this case a different load and dump tape must be used in step 3a (above).
- b. If error occurs on write, restart from Step 3a, and use a different tape in Steps 3c (above).
- h. If the computer stops and none of the error stops described above appear, restart beginning at step 3a, above.

4. LOADING A PROGRAM OR FILE FROM THE "MAGNETIC AUTOMATIC LOAD AND DUMP TAPE" INTO THE 8092B CORE.
- a. Mount the "Magnetic Automatic Loand and Dump Tape" on tape drive 3. Set tape drive 3 to a ready state with the magnetic tape at load point. Master Clear 8092B computer
- Put the LOAD switch into the up position, then the RUN switch into the up position. One record will be read from the nagnetic tape on tape drive 3. The computer will come to a halt with the following information in the registers
- P = 1401 OR 1403, A = 577, Z = 000.
- Return both the LOAD and RUN switches to the normal (center) position.
- b. MASTER CLEAR 8092B COMPUTER
- Put the RUN switch into the up position. The computer will come to a halt with the following information in the registers.
- P = 6716, A = 0, Z = 077
- Return the RUN switch to the normal (center) position.
- c. Enter into the "A-REGISTER" the file number that is to be loaded in the lower 4-bits of the A-REGISTER.
- NOTE: A-REGISTER
- | | | | | |
|------|---|---|---|---|
| Bits | 3 | 2 | 1 | 0 |
| F | I | L | E | |
- not used File Number
for load-
ing a file
- If files 1 to 7 are to be called, enter the A-REGISTER with that specific file number. If files 8 to 15 are to be called, enter the A-REGISTER with that specific file number in OCTAL.
- Put the RUN switch into the up position. When the computer halts, the file which was specific is now stored into the 8092B core. The registers are as follows:
- P = 7361, A = ZERO, Z = 077.
- If the A-REGISTER is other than zero, the file specified was not loaded correctly. Restart with step 4a.
- If the A-REGISTER equal to zero, the file specified was loaded correctly.

d. ERROR STOPS

Return the RUN switch to the normal (center) position.

1. P = 7003, A = 000, Z = 077.

REASON: No assignment job was specified.

RECOVERY: Enter the job assignment into the A-REGISTER.

Put the RUN switch into the up position.

2. P = 7102, A = 002, Z = 077.

REASON: Tape drive unit 3 was not ready.

RECOVERY: Correct the condition of the tape drive

Put the RUN switch into the up position.

3. P = 7203, A = 000, Z = 077

REASON: File requested from the (ALD) does not exist.

RECOVERY: None

4. P = 7275, A = 022, Z = 077

REASON: Parity error detected on five successive attempts to read or write

RECOVERY: None. Restart from step 4a (above) and use a different (ALD) tape

5. P = 7372, A = 377, Z = 077

REASON: The program or file which was to be dumped on the ALD tape exceeds bank 14.

RECOVERY: None (program is too large for dumping)

6. P = 7656, A = 000, Z = 077

REASON: File requested from the ALD does not exist

RECOVERY: None

If the computer stops and none of the error stops described above appear, restart beginning at step 4a (above).

5. DUMPING A PROGRAM OR FILE FROM THE MAGNETIC AUTOMATIC LOAD AND DUMP TAPE (ALD)

- a. The routines that execute the 8092B core dump are stored in banks 14 and 15 (octal 16 and 17). If a program is to be dumped after execution, it cannot use banks 14 or 15 since to do so, would destroy the dump routine.
- b. When a specific file on the ALD is to be altered and the revised file does not alter the previous file size it may return to the ALD under the same file number. If the revision does alter the previous file size, it must be dumped as a new file on the ALD.

INSTRUCTIONS FOR DUMPING TO THE ALD

- c. Mount the ALD tape (on which the file is to be recorded) on tape drive 3. Set the tape drive to a ready state with the ALD at load point.

MASTER CLEAR THE 8092B Computer

SET TAG2 to bank 14 (16 octal)

SET TAG3 to bank 15 (17 octal)

SET THE P-REGISTER TO 7001.

- d. Enter in the A-REGISTER the total number of banks to be dumped. If the dump is to be an updating of the ALD as the same file, then enter the file number also in the A-REGISTER. If the file is to be added to the ALD leave the A-REGISTER file indicator bits blank.

A-REGISTER

Bit Positions 7 6 5 4 3 2 1 0 of the A-REGISTER

Bit Positions 3 2 1 0 3 2 1 0 of the indicators.

B A N K F I L E

Bank Indicator	File Indicator
-------------------	-------------------

Put the RUN switch into the up position. The computer will come to a halt

with the following information in the registers.

P = 7352, A = FILE NUMBER, Z = 77.

Return the RUN switch to the normal (center) position.

- e. The A-REGISTER will then contain the file number (for the file just dumped) on the ALD.

f. ERROR STOPS

Return the RUN switch to the normal (center) position.

1. P = 7003, A = 0, Z = 77

REASON: No assignment job was specified

RECOVERY: Enter the job assignment into the A-REGISTER.

Put the RUN switch into the up position

2. P = 7102, A = 2, Z = 77

REASON: Tape drive unit 3 was not ready

RECOVERY: Correct the condition of the tape drive.

Put the RUN switch into the up position.

3. P = 7203, A = 0, Z = 77

REASON: File requested from the ALD does not exist

RECOVERY: None

4. P = 7275, A = 22, Z = 77

REASON: Parity error detected on five successive attempts to read or write

RECOVERY: None. Restart from step 5c above and use a different ALD tape

5. P = 7372, A = 377, Z = 77

REASON: The program or file which was to be dumped on the ALD tape exceeds bank 14.

RECOVERY: None. (Program is too large for dumping.)

6. P = 7656, A = 0, Z = 77

REASON: File requested from the ALD does not exist


RECOVERY: None

- g. If the computer stops and none of the error stops described above appear, restart beginning at step 5c, above.

PROGRAM NEW

FORMAT


8090 OR 160A COMPUTER
MEMORY

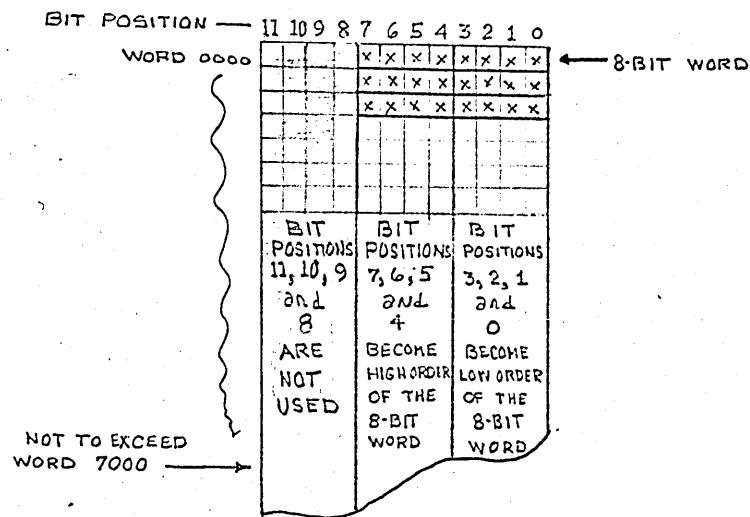

IT TAKES THE 8-BIT WORD DIVIDES THEM INTO TWO 4-BIT WORDS, THE HIGH ORDER BEING SHIFTED TO BITS 3, 2, 1 AND 0, BIT 4 IS ADDED TO IDENTIFY HIGH ORDER BITS OF THE 8-BITWORD.

THEY ARE OUTPUTTED AS A NEW FILE ON THE MAGNETIC "AUTOMATIC LOAD AND DUMP TAPE" AS 102 FRAMES PER RECORD. THE LAST RECORD OF THE FILE, IS LESS THEN 102 FRAMES. THE LAST TWO FRAMES CARRY THE CHECKSUM OF THE 8-BIT WORDS IN THAT RECORD.

MAGNETIC "AUTOMATIC LOAD and DUMP TAPE".

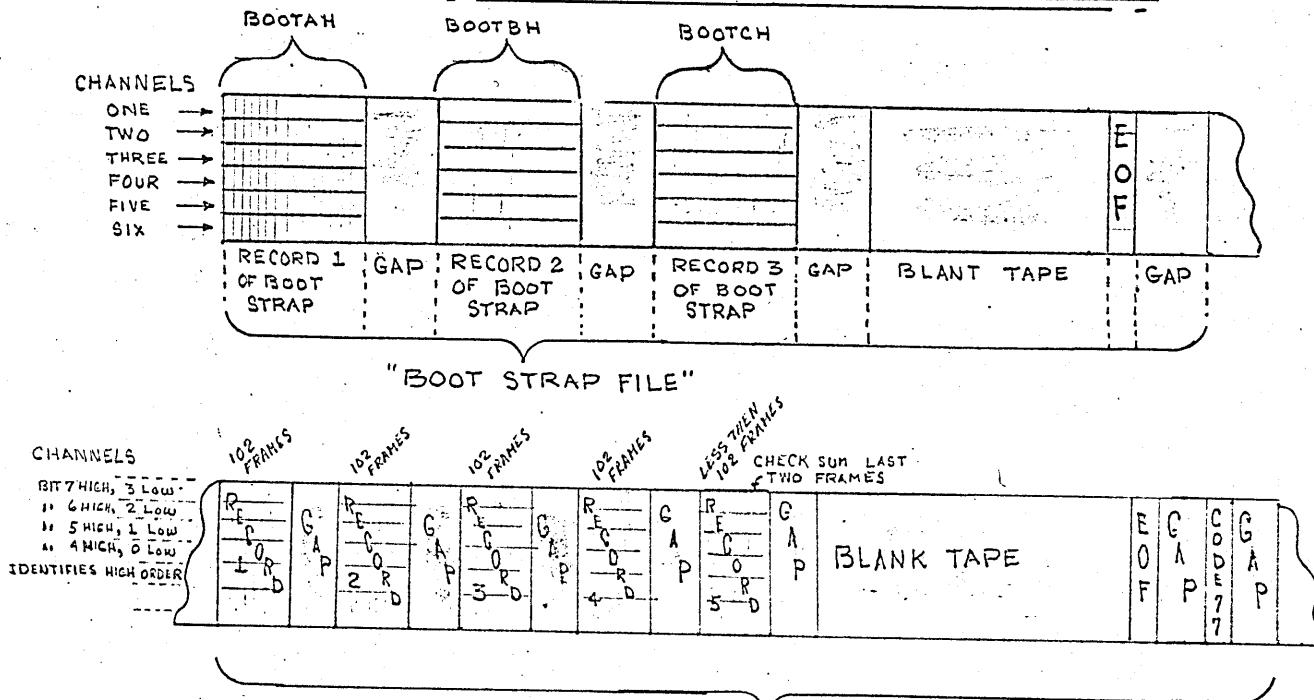

(NEW) → FILE ADDED TO MAGNETIC TAPE

n nicholas

NEW

I. Function

A. General

Program NEW is executed by the 8090 or the 160A Computer. After a program is assembled by OSAS-A for usage with the 8092B computer (Teleprogrammer). It maybe added onto the magnetic "Automatic Load and Dump Tape" and recorded as a specific file for further use with the 8092B Computer.

B. Detail

The binary output paper tape from the OSAS-A assembly of a program, can be loaded with the binary loader into the 8090 or the 160A computer. Program NEW will take each output word and save the lower 8-bits of that word, it will checksum that word and divide it into two 4-bit words. Each 4-bit word is placed in the low order of the output word. NEW identifies the high order 4-bits of the 8-bit word by adding bit position four. It searches the magnetic "Automatic Load and Dump Tape" for the last file, and it then will output the 4-bit words onto the magnetic "Automatic Load and Dump Tape" in record lengths of 102 characters. The last record to be in this file will carry the checksum of the 8-bit words in the last two frames. It will display a number in the A-REGISTER indicating the location of file on the magnetic "Automatic Load and Dump Tape".

II. CONTROL WORDS

NEWA	The last word address of the 8-bit words to be outputted.
NEWB	Checksum of each 8-bit word before storing for output.
NEWC	Programs file number on the (ALD) that was just outputted.
NEWD	Storage of the 8-bit word while being processed.
NEWG	Switch test to indicate the last record for the file being outputted.
NEWH	Last word address of the record for writing on magnetic tape.
NEWF	The start address for the 102 characters to be outputted.

III. ENTRY POINT

NEW

IV. EXIT

NONE


PROGRAM NAME NEW

OUTPUTS NEW FILE ON (ALD)

FROM 8090 OR 160A
COMPUTER TO A 603 TAPE
DRIVE.

PROGRAMS CONTROL WORDS

NEWA	LAST WORD ADDRESS FOR DUMPING
HEWB	CHECKSUM OF EACH 8-BIT WORD BEFORE STORING
NEWC	PROGRAMS FILE NUMBER ON THE (ALD) TAPE
NEWD	PROCESSING OF THE 8-BIT WORD.
NEWG	SWITCH FOR LAST RECORD TO BE DUMPED
NEWH	LAST WORD ADDRESS FOR THE SIZE OF THE RECORD
NEWF	OUTPUT AREA 102 CHARACTER.

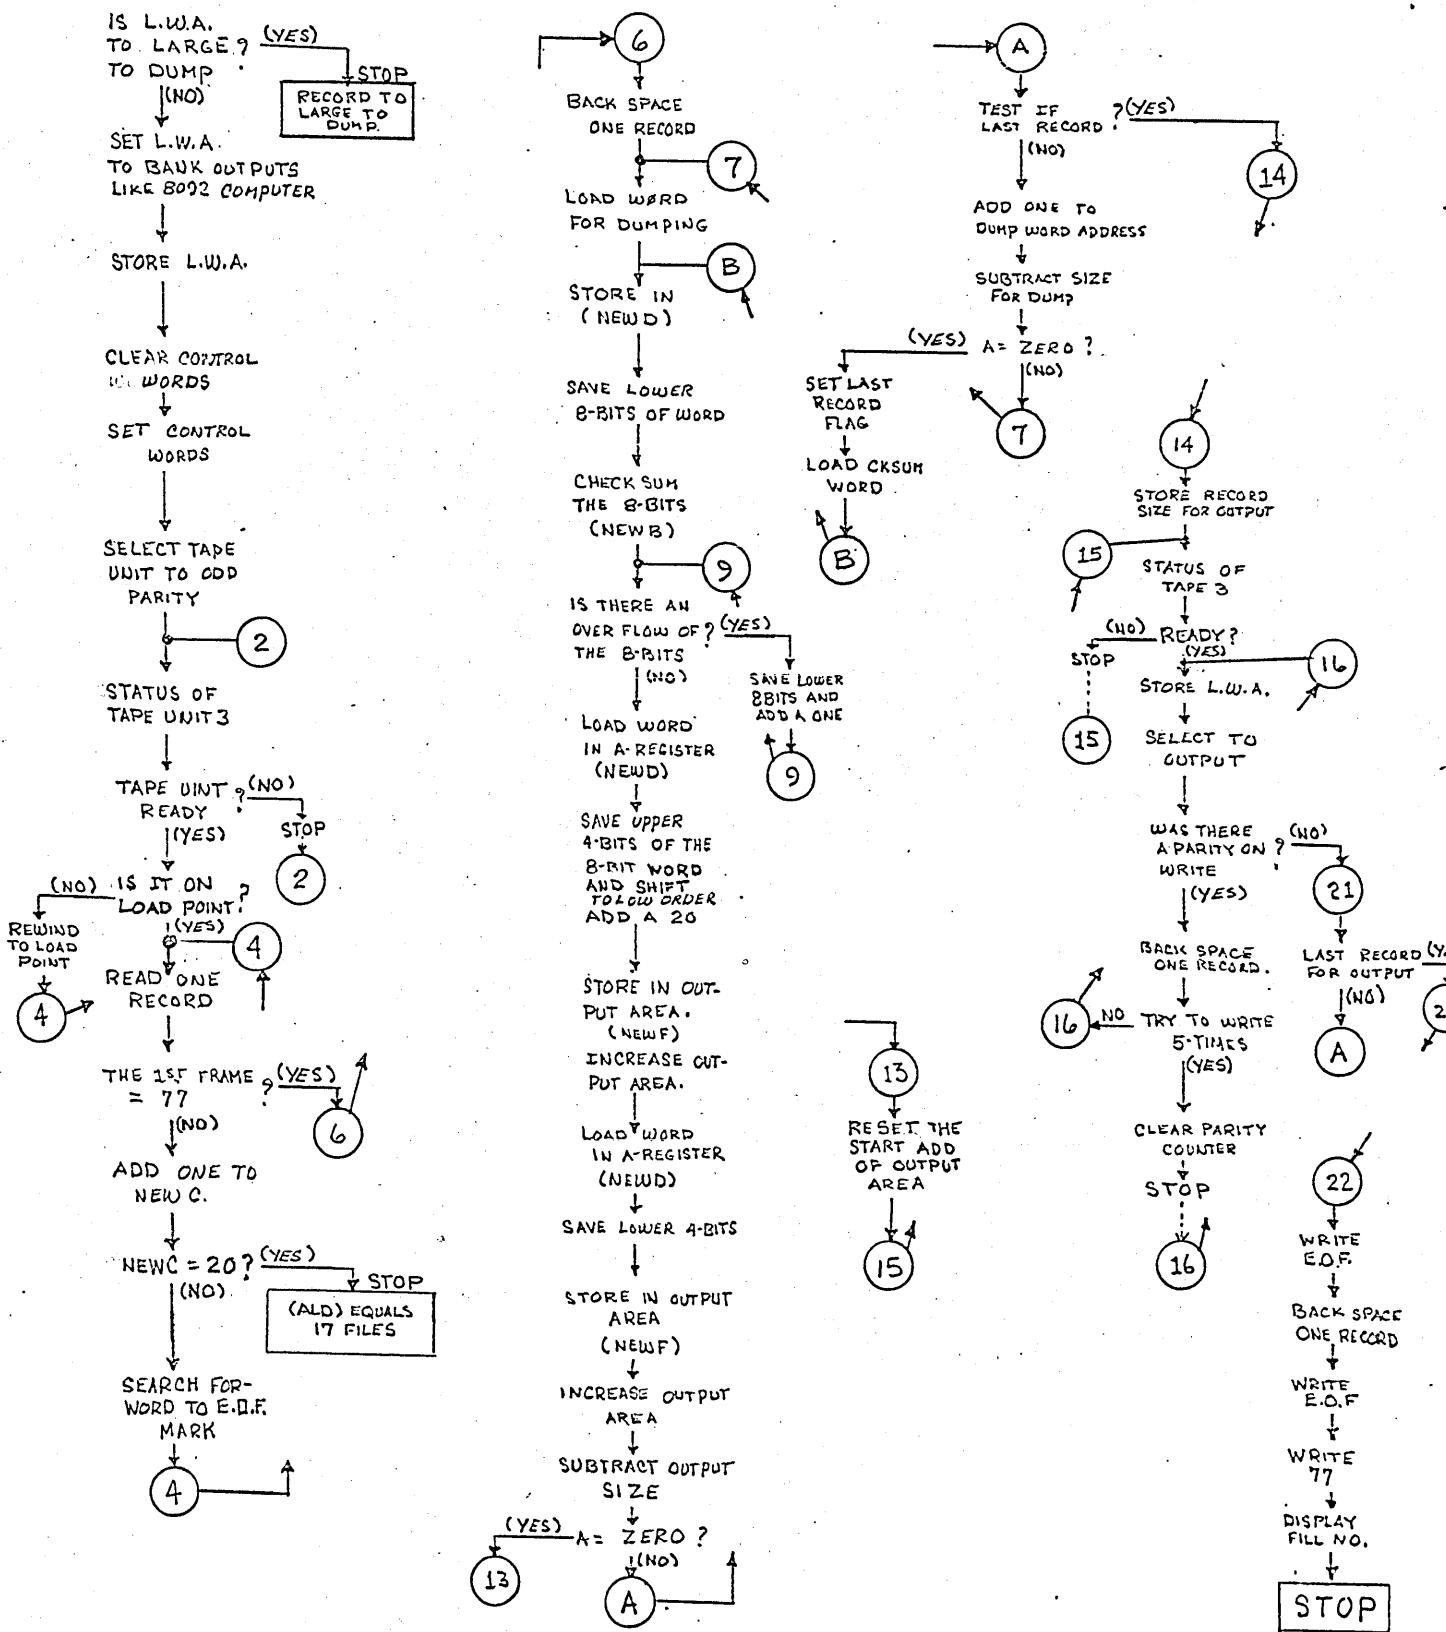

n nicholas

7000 ORG 7000

7000		PRG	7000
0000		BNKO	
7000	4257	NEW	STF NEWA
7001	6012		ZJF NEWI -2
7002	6213		PJF NEWI
7003	1200		LPC 7400
7004	7400		
7005	0111		LS6
7006	4203		STF 3
7007	0470		LDN 70
7010	3600		
7011	0000		3600
7012	6203		
7013	0477		0
7014	7700		
7015	0400	NEWI	HLT 77
7016	4265		LDN 0
7017	4267		** PROGRAM IS TO LARGE TO DUMP.
7020	4264		** CLEAR CONTROL WORDS.
7021	4273		STF NEWC
7022	2200		STF NEW7 1
7023	7270		LDC NEWF
7024	4100		STM NEWII 1
7025	7141		
7026	3200		ADC 102
7027	0102		
7030	4257		STF NEWH
7031	2226		LDF NEWA
7032	1200		LPC 377
7033	0377		
7034	6007		ZJF NEW2
7035	2222		LDF NEWA
7036	3200		ADC 400
7037	0400		
7040	1200		LPC 7400
7041	7400		
7042	4215		STF NEWA

* PROGRAM NAME *NEW*
*
* ADD A NEW PROGRAM ON *
* THE MAGNETIC AUTO- *
* MATIC LOAD AND DUMP *
* TAPE

7043	7500	NEW2	EXC	1171	** SELECT TAPE DRIVE TO ODD PARITY
7044	1171				
7045	7500		EXC	1143	
7046	1143				
7047	7600		INA		
7050	6010		ZJF	NEW3	
7051	0242		LPN	42	
7052	0740		SBN	40	
7053	6013		ZJF	NEW4	4
7054	0402		LDN	2	
7055	7700		HLT		** TAPE DRIVE 3 IS NOT READY
7056	6513		NZB	NEW2	
7057	0000	NEWA			** LAST WORD ADDRESS FOR DUMP.
7060	7500	NEW3	EXC	1163	** REWIND TO LOAD POINT
7061	1163				
7062	7500	NEW4	EXC	1143	** READ 1ST FRAME ON THE RECORD
7063	1143				
7064	7600		INA		
7065	6503		NZB	NEW4	
7066	7500		EXC	1133	
7067	1133				
7070	7600		INA		
7071	0777		SBN	77	
7072	6016		ZJF	NEW6	
7073	5611		AOF	NEWC	
7074	0720		SBN	20	
7075	6004		ZJF	NEWS	
7076	7500		EXC	1133	
7077	1133				
7100	6516		NZB	NEW4	
7101	0420	NEWS	LDN	20	** SET A-REGISTER TO INDICATE (ALD) ALL READY = 17 FILES
7102	7700		HLT		
7103	0000	NEWB			** CKSUM OF EACH WORD BEFORE DUMPED
7104	0000	NEWC			** PROGRAMS FILE NO. ON THE (ALD)
7105	0000	NEWD			** PROGRAMS WORDS FOR DUMPING
7106	0000	NEWG			** SWITCH FOR LAST RECORD TO DUMP
7107	7372	NEWH	NEWF	102	** LAST WORD ADDRESS FOR THE RECORDS
7110	7500	NEW6	EXC	1123	** BACK SPACE ONE RECORD BEFORE DUMP
7111	1123				
7112	7600		INA		
7113	2100	NEW7		2100	** LOAD WORD FOR DUMPING
7114	0000			0	
7115	4310		STB	NEWD	
7116	1200	NEW8	LPC	377	** CKSUM THE LOWER 8-BITS.
7117	0377				
7120	5315		RAB	NEWB	
7121	1200	NEW9	LPC	400	** ECHECK OVERFLOW OF THE 8-BITS
7122	0400				

7123	6007	ZJF	NEW10		
7124	2321	LDB	NEWB		
7125	1200	LPC		377	
7126	0377				
7127	4324	STB	NEWB		
7130	5725	AOB	NEWB		
7131	6510	NZB	NEW9		
7132	2325	NEW10	LDB	NEWD	** LOAD WORD TO BE DIVIDE.
7133	1200	LPC		360	
7134	0360				
7135	0115	RS2			
7136	0115	RS2			
7137	0620	ADN		20	
7140	4100	NEW11	STM	NEWF	** STORE HIGH ORDER OF THE 8-BIT WOR
7141	7270				
7142	5701	AOB	NEW11	I	
7143	4204	STF	NEW12		
7144	2337	LDB	NEWD		
7145	0217	LPN		17	
7146	4100			4100	
7147	0000	NEW12			** ADDRESS TO STORE LOWER 4-BITS
7150	5707	AOB	NEW11	I	
7151	4302	STB	NEW12		
7152	3600	SBC	NEWF	102	
7153	7372				
7154	6013	ZJF	NEW13		
7155	2347	LDB	NEWG		
7156	6115	NZF	NEW14		
7157	5743	AOB	NEW7	I	
7160	3500	SBM	NEWA		
7161	7057				
7162	6547	NZB	NEW7		
7163	5755	AOB	NEWG		
7164	2361	LDB	NEWB		
7165	7101	JFI		I	
7166	7115			2	
7167	2200	NEW13	LDC	NEWF	** RESET THE STORING ADDRESS TO A
7170	7270				
7171	4330	STB	NEW11	I	BEGIANNING STATE
7172	6103	NZF	NEW15		
7173	2332	NEW14	LDB	NEW11	** STORE THE L.W.A. OF THE RECORD
7174	4365	STB	NEWH		
7175	7500	NEW15	EXC		1143 ** STATUS OF THE TAPE DRIVE 3
7176	1143				
7177	7600	INA			
7200	6005	ZJF	NEW16		
7201	0202	LPN		2	
7202	6505	NZB	NEW15		

7203	7700	HLT		** TAPE DRIVE 3 IS NOT READY
7204	6507	NZB	NEW15	
7205	2100	LDM	NEWH	** STORE THE L.W.A. OF RECORD
7206	7107			
7207	4204	STF	NEW17	FOR THE OUTPUT.
7210	7500	EXC		
7211	1113			
7212	7304	OUT	NEW18	
7213	0000	NEW17		** PRESTORED L.W.A.
7214	7101	JFI		
7215	7217			
7216	7270	NEW18	NEWF	** FIRST WORD ADDRESS FOR OUTPUT.
7217	7500	NEW19		** STATUS OF THE LAST RECORD
7220	1143	EXC		
7221	7600	INA		THAT HAS BEEN OUTPUTTED.
7222	6020	ZJF	NEW21	
7223	0206	LPN		
7224	0704	SBN		
7225	6003	ZJF	NEW20	
7226	7700	HLT		** TAPE DRIVE 3 IS NOT READY
7227	6510	NZB	NEW19	
7230	7500	NEW20	EXC	** PARITY ERROR, BACKSPACE
7231	1123			
7232	7600	INA		ONE RECORD TO TRY AGAIN
7233	5606	AOF	NEWE	
7234	0705	SBN		
7235	6530	NZB	NEW16	
7236	4203	STF	NEWE	
7237	7700	HLT		
7240	6433	ZJB	NEW16	
7241	0000	NEWE		** PARITY ERROR COUNTER.
7242	4301	NEW21	STB	** TEST POINT FOR LAST RECORD
7243	2100		LDM	
7244	7106			
7245	6103	NZF	NEW22	TO BE OUTPUTTED.
7246	7101	JFI		
7247	7155		NEW12	
7250	7500	NEW22	EXC	** OUTPUT IDENTIFICATION MARKS
7251	1113			
7252	7500	EXC		ON THE (ALD) TAPE.
7253	1123			
7254	7600	INA		
7255	7500	EXC		
7256	1113			
7257	7500	EXC		
7260	1113			
7261	7477	OTN		
7262	7500	EXC	1163	77

7263 1163
7264 2100 LDM NEWC
7265 7104
7266 7700 HLT ** FILE NO. INDICATED IN A-REGISTER
7270 0000 PRG 7270
7270 0000 NEWF
 END

PROGRAM PACK

FORMAT

MEMORY OF THE
8090 OR 160A COMPUTER

RECORD 1

BOOTAH AND BOOTA
WITH
PROGRAMS COPY AND CALL

RECORD 2

BOOTBH AND BOOTB
WITH
PROGRAMS SET, HTLD
AND PART OF DPTT

RECORD 3

BOOTCH AND BOOTC
WITH
PROGRAMS DPTT AND LOFT



RECORDS OF THE OUTPUT STORED ON MAGNETIC TAPE.

RECORD 1

BOOTAH
6-BIT WORD
45-OCTAL
LOCATION

BOOTA
4-BIT WORDS

PROGRAMS COPY AND CALL
4-BIT WORDS

BOOT
STRAP
FILE

BOOTBH
6-BIT WORDS
15-OCTAL
LOCATION

BOOTB
4-BIT WORDS

PROGRAMS SET, HTLD AND PART OF DPTT
4-BIT WORDS

RECORD
GAP

RECORD
GAP

RECORD 3

BOOTCH
6-BIT WORDS
45-OCTAL
LOCATION

BOOTC
4-BIT WORDS

PROGRAMS DPTT AND LOFT
4-BIT WORDS

INPUT
OUTPUT
AREA

E	O	C
O	I	D
F	E	J

RG RG RG

IT TAKES THE MEMORY LOCATIONS FROM 0000 TO 2777 OF THE 8090
OR 160A COMPUTER and OUTPUTS THEM TO THE MAGNETIC TAPE.

STARTS WITH RECORD 1, THEN RECORD 2 AND 3 FOLLOWS.

n nicholas

PACK

I. Function

A. General

This program is for the 8090 or 160A Computer and will generate the BOOT STRAP on the Automatic Load and Dump Tape which can be used by the 8092B Computer.

B. Detail

The binary output paper tape from the OSAS-A assembly for the BOOT STRAP is loaded with a binary loader into the 8090 or 160A core starting at word zero.

Records of the BOOT STRAP take the following Core locations. Record one, is in 0000 to 0777, record two is in 1000 to 1777 and record three is in 2000 to 2777. The first 45 octal locations of the records use only the low 6-bits of the 12-bit word, and are stored into an output area. The remaining locations use the lower 8-bits of the 12-bit word, and are divided into two 4-bit words with the high order of the 8-bit word being identified, then are stored into an output area.

Record one is processed in this manner first, then is outputted to the magnetic tape in the binary and low density mode, record two and three follow. The end of file mark is then outputted and followed with a code mark. (Octal 77). The magnetic tape is now an Automatic Load and Dump Tape for the 8092B Computer.

II. Control Words

PACKA	Starting address of the record being dumped.
PACKB	Last word address, for the 6-bit words first, then the 4-bit words.
PACKC	Starting address of the output area.
PACKD	Temporary storage for the 12-bit words.
PACKE	Counter for the output of the three records.

III. Entry Points


None

IV. Exits

None

PROGRAM NAME
PACK

OUTPUTS BOOT, TO MAGNETIC TAPE
FROM 8090 TO A 603

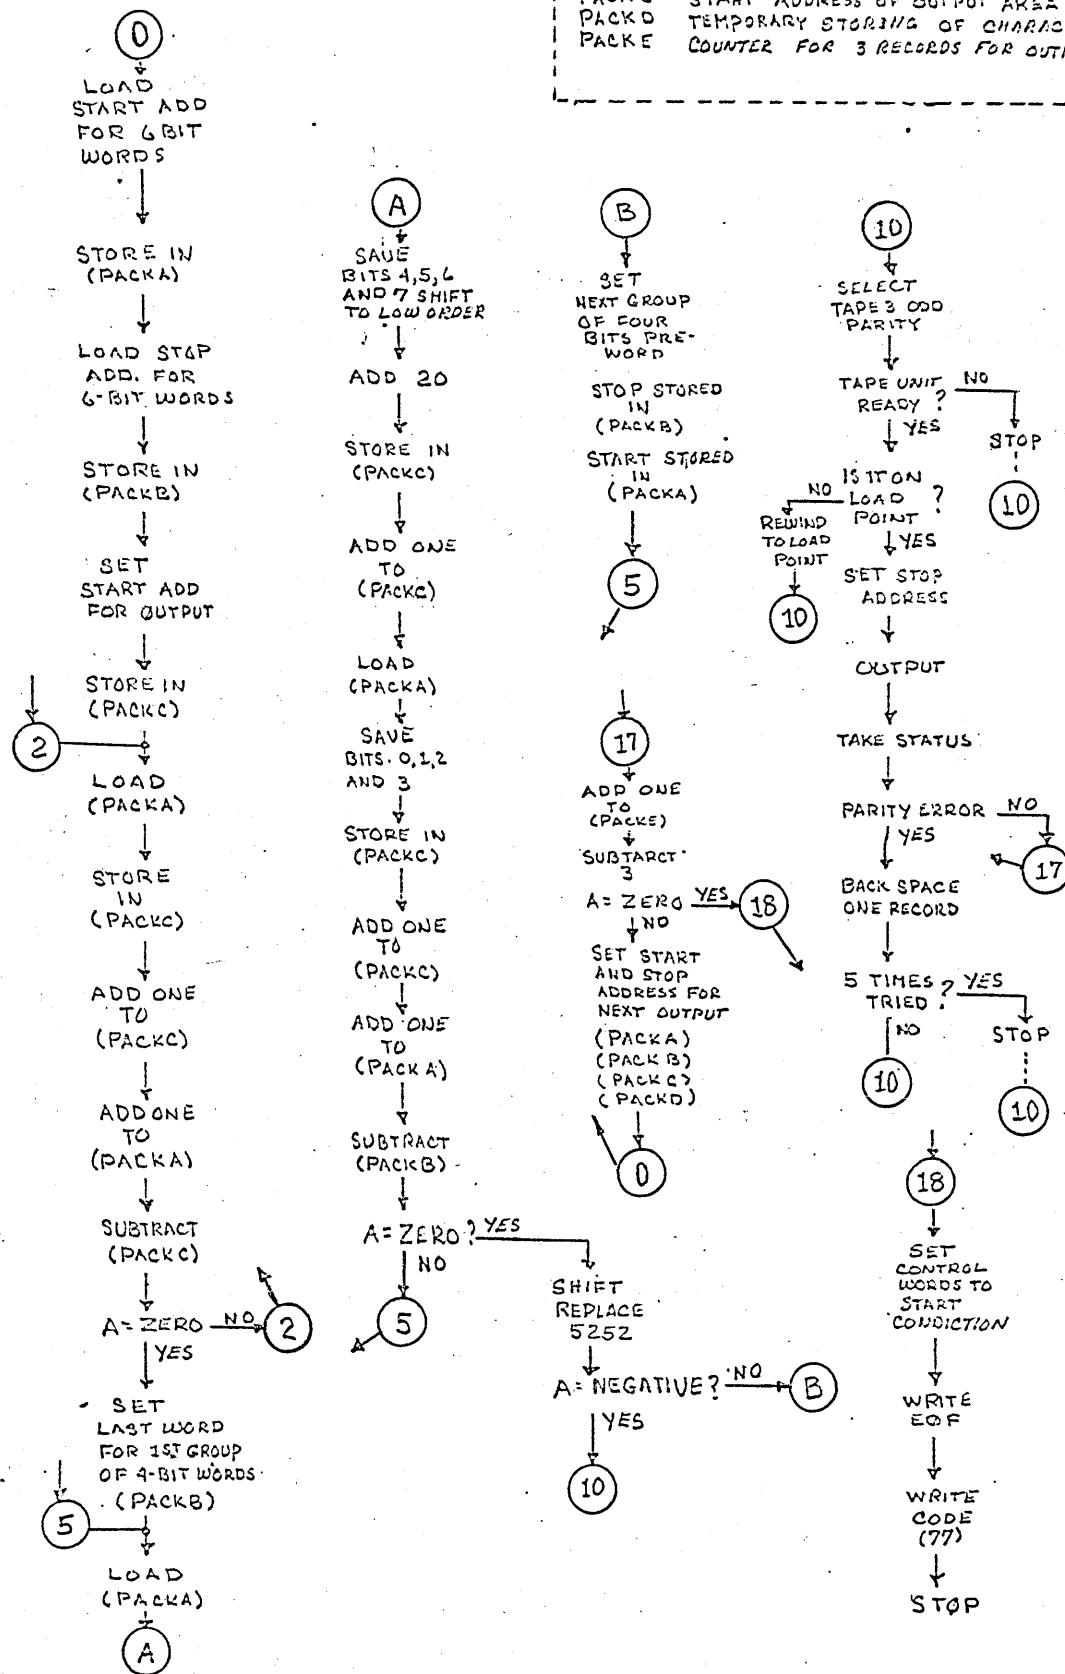

PROGRAM CONTROL WORDS

PACK A	START ADDRESS OF PROGRAM BEING DUMPED
PACK B	STOP ADDRESS 1ST 6BITS THE 4BIT PREWORD
PACK C	START ADDRESS OF OUTPUT AREA
PACK D	TEMPORARY STORING OF CHARACTER
PACK E	COUNTER FOR 3 RECORDS FOR OUTPUT.

R Nicholas

	7000	ORG	7000
7000	0000	BNKO	
7000	2200	PACK	LDC 0
7001	0000		
7002	4273	STF	PACKA
7003	2200	PACK1	LDC 56
7004	0056		
7005	4271	STF	PACKB
7006	2200		LDC 3000
7007	3000		
7010	4267	STF	PACKC
7011	4100		STM PACK14
7012	7141		
7013	2262	PACK2	LDF PACKA
7014	4204		STF PACK3
7015	2262		LDF PACKC
7016	4204		STF PACK4
7017	2100		2100
7020	0000	PACK3	
7021	4100		4100
7022	0000	PACK4	
7023	5654		AOF PACKC
7024	5651		AOF PACKA
7025	3651		SBF PACKB
7026	6513		NZB PACK2
7027	2200		LDC 227
7030	0227		
7031	4245	STF	PACKB
7032	2243	PACK5	LDF PACKA
7033	4204		STF PACK6
7034	2243		LDF PACKC
7035	4212		STF PACK7
7036	2100		2100
7037	0000	PACK6	
7040	4240		STF PACKD
7041	1200		LPC 360
7042	0360		
7043	0115		RS2
7044	0115		RS2
7045	0620		ADN 20
7046	4100		4100
7047	0000	PACK7	
7050	5627		AOF PACKC

* 8090 PROGRAM TO CREATE BOOT
* STRAP ON TAPE FOR 8092
* TELEPROGRAMMER



** START ADDRESS OF DATA
** PRESTORED ADDRESS FOR LOADING
** PRESTORED ADDRESS FOR STORING
** GET NEXT ADDRESS FOR NEXT WORD
** PRESTORED ADDRESS FOR LOADING
** PRESTORED ADDRESS FOR STORING

7051	4204	STF	PACK8	
7052	2226	LDF	PACKD	
7053	0217	LPN		17
7054	4100			4100
7055	0000	PACK8		** PRESTORED ADDRESS FOR STORING
7056	5621	AOF	PACKC	
7057	5616	AOF	PACKA	
7060	3616	SBF	PACKB	
7061	6527	NZB	PACK5	
7062	4600	SRC		5252
7063	5252			
7064	6316	NJF	PACK10	
7065	2200	LDC		400
7066	0400			
7067	4206	STF	PACKA	
7070	2200	PACK9	LDC	1001 ** SET NEW ADDRESS FOR STOP.
7071	1001			
7072	4204	STF	PACKB	
7073	7101	JFI		1
7074	7032		PACK5	
7075	0000	PACKA		** START ADDRESS FOR LOADING CHAR.
7076	0000	PACKB		** STOP ADDRESS FOR 6 BITS, THEN 4 B
7077	0000	PACKC		** START OF OUTPUT AREA
7100	0000	PACKD		** TEMPORARY STOREAGE OF CHARACTER
7101	0000	PACKE		** TIMES COUNTER FOR 3 OUTPUTS
7102	4600	PACK10	SRC	2222 ** CHECK IF FIRST TIME THROUGH
7103	2222			
7104	6224	PJF	PACK12	
7105	7500	EXC		1171
7106	1171			
7107	7500	EXC		1143
7110	1143			
7111	7600	INA		
7112	0242	LPN		42
7113	4206	STF	PACK11	
7114	0202	LPN		2
7115	6003	ZJF	PACK11	-1
7116	7700	HLT		
7117	6510	NZB	PACK10	5
7120	2200			2200
7121	0000	PACK11		** PRESTORED STATUS
7122	0240	LPN		40
7123	6105	NZF	PACK12	
7124	7500	EXC		1163
7125	1163			
7126	7101	JFI		1
7127	7107		PACK10	5
7130	2331	PACK12	LDB	PACKC ** LAST WORD ADDRESS FOR OUTPUT

7131	0601	ADN	I	
7132	4204	STF	PACK13	
7133	7500	EXC	1113	
7134	1113			
7135	7304	OUT	PACK14	
7136	0000	PACK13		** PRESTORED L. W. A. FOR OUTPUT.
7137	7101	JFI	I	
7140	7142		PACK15	
7141	0000	PACK14		** PRESTORED F. W. A. FOR OUTPUT
7142	7500	PACK15	EXC	** STATUS OF LAST OUTPUT
7143	1143			
7144	7600	INA		
7145	0204	LPN	4	
7146	6015	ZJF	PACK17	
7147	7500	EXC	1123	
7150	1123			
7151	7600	INA		
7152	5610	AOF	PACK16	
7153	0705	SBN	5	
7154	6552	NZB	PACK10	
7155	4205	STF	PACK16	
7156	2200	LDC	7777	
7157	7777			
7160	7700	HLT		
7161	6557	NZB	PACK10	
7162	0000	PACK16		** PARITY ERROR COUNTER.
7163	5762	PACK17	AOB	** TIMES COUNTER FOR OUTPUT
7164	0703	SBN		
7165	6027	ZJF	PACK18	
7166	2200	LDC	1000	
7167	1000			
7170	5100	RAM	PACK	I
7171	7001			
7172	2200	LDC	1000	
7173	1000			
7174	5100	RAM	PACK1	I
7175	7004			
7176	2200	LDC	1000	
7177	1000			
7200	5100	RAM	PACK4	6
7201	7030			
7202	2200	LDC	1000	
7203	1000			
7204	5100	RAM	PACK9	-2
7205	7066			
7206	2200	LDC	1000	
7207	1000			
7210	5100	RAM	PACK9	I

7211	7071			
7212	7101	JFI	I	
7213	7000		PACK	
7214	4100	PACK18	PACKE	** CLEAR TIMES COUNTER AND
7215	7101	STM		
7216	4100	STM	PACK	I RESET TO START CONDICTION
7217	7001			
7220	0456	LDN	56	
7221	4100	STM	PACK1	I
7222	7004			
7223	2200	LDC	227	
7224	0227			
7225	4100	STM	PACK4	6
7226	7030			
7227	2200	LDC	400	
7230	0400			
7231	4100	STM	PACK9	-2
7232	7066			
7233	2200	LDC	1001	
7234	1001			
7235	4100	STM	PACK9	I
7236	7071			
7237	7500	EXC	1113	
7240	1113			
7241	7500	EXC	1113	
7242	1113			
7243	7477	OTN	77	
7244	7700	HLT		
7245	7101	JFI	I	
7246	7000		PACK	
	0000	END		

BOOTH A and BOOT A FORMAT

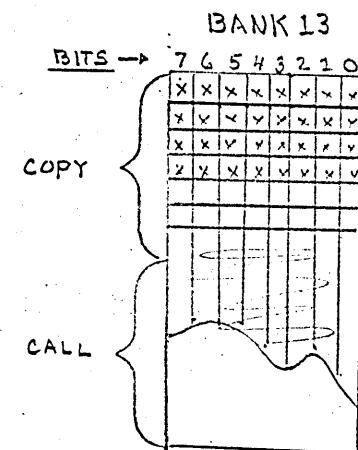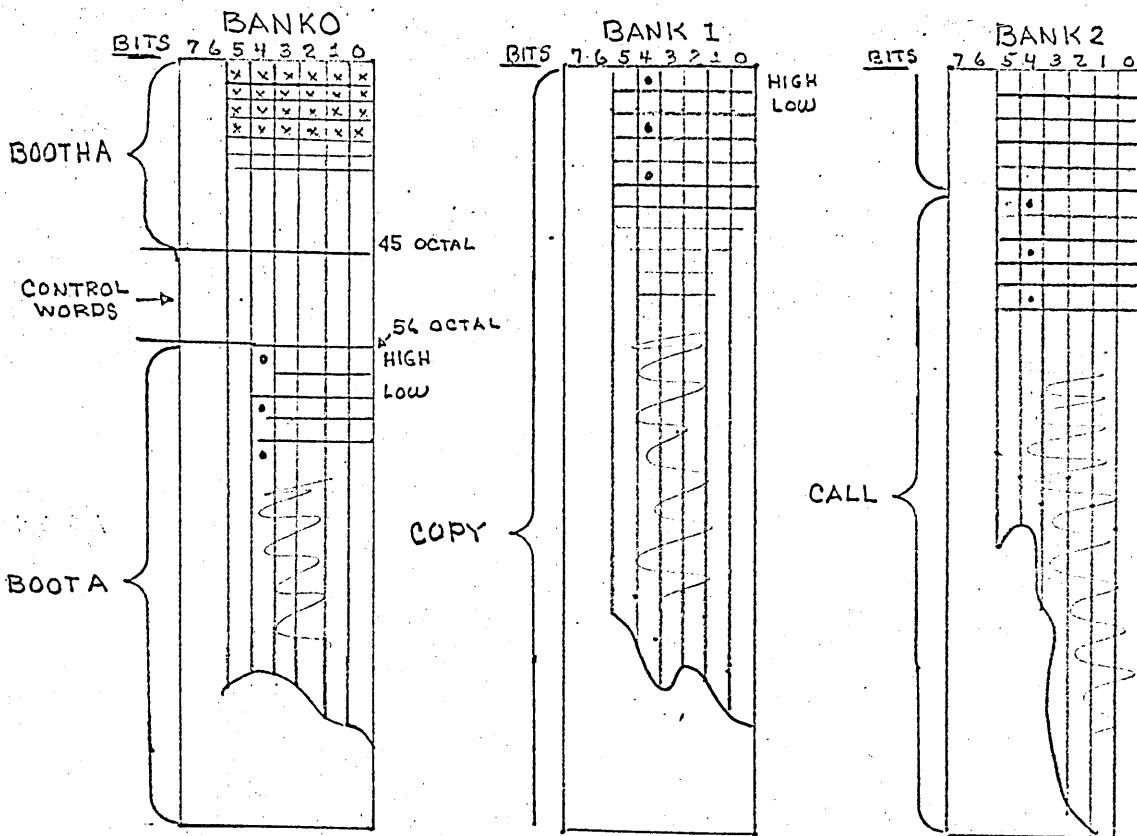

BOOTH A : BANK-0, THE FIRST 45 OCTAL LOCATION ARE 6-BIT WORDS.
 BANK-0 FROM 56 (OCTAL) TO 376 (OCTAL) OF BANK 2,
 THEY ARE 4-BIT WORDS WITH THE HIGH ORDER FOR AN 8-BIT
 WORD BEING IDENTIFIED BY BIT POSITION 4.

BANK13 COPY AND CALL

AFTER, THE 4-BIT WORDS ARE ASSEMBLED INTO 8-BIT WORDS.

2 nicholas

BOOTAH AND BOOTA

I. Function

A. General

To store two programs COPY and CALL into Bank 13 and then exit to Program Call for the next record of the BOOT STRAP file.

B. Detail

The BOOT STRAP has three records in its file. Programs BOOTAH and BOOTA, is the first record and are loaded into the 8092B core with the Load and Run switches of the Teleprogrammer starting with word 0, Bank 0. BOOTAH is a set of six bit per word instructions, when executed it builds a set of eight bit per word instructions, from two four bit words. This becomes program BOOTA. BOOTA will take the remaining four bit words, combine the high and the low orders, to build an eight bit word and stores them into bank 13. These eight bit words are program instructions belonging to COPY and CALL.

Then will exit to Program CALL for the next record of the BOOT STRAP.

II. Control Tags

TAG 1. Used while combining the high and the low order of each word before storing.

TAG 2. First set to Bank 13 to be used while storing programs COPY and CALL, then is set for the exit to program CALL.

III. Control Words

BOOTAO Temporary storage for the building of the eight bit word.

BOOTAA Lower order of the eight bit word.

BOOTAB High order of the eight bit word.

BOOTAC Temporary storage for the building of the eight bit word.

BOOTAD Address for storing COPY and CALL.

BOOTAE Crossing of the banks.

BOOTAF Starting address of the four bit words.

BOOTAG Flag test for the completion of storing COPY and CALL to their proper bank.

IV Entry Point

BOOTAH


V. Exits

To Program CALL

PROGRAM NAME

BOOTAH

IT ASSEMBLES A PROGRAM TO WORK WITH TAGS

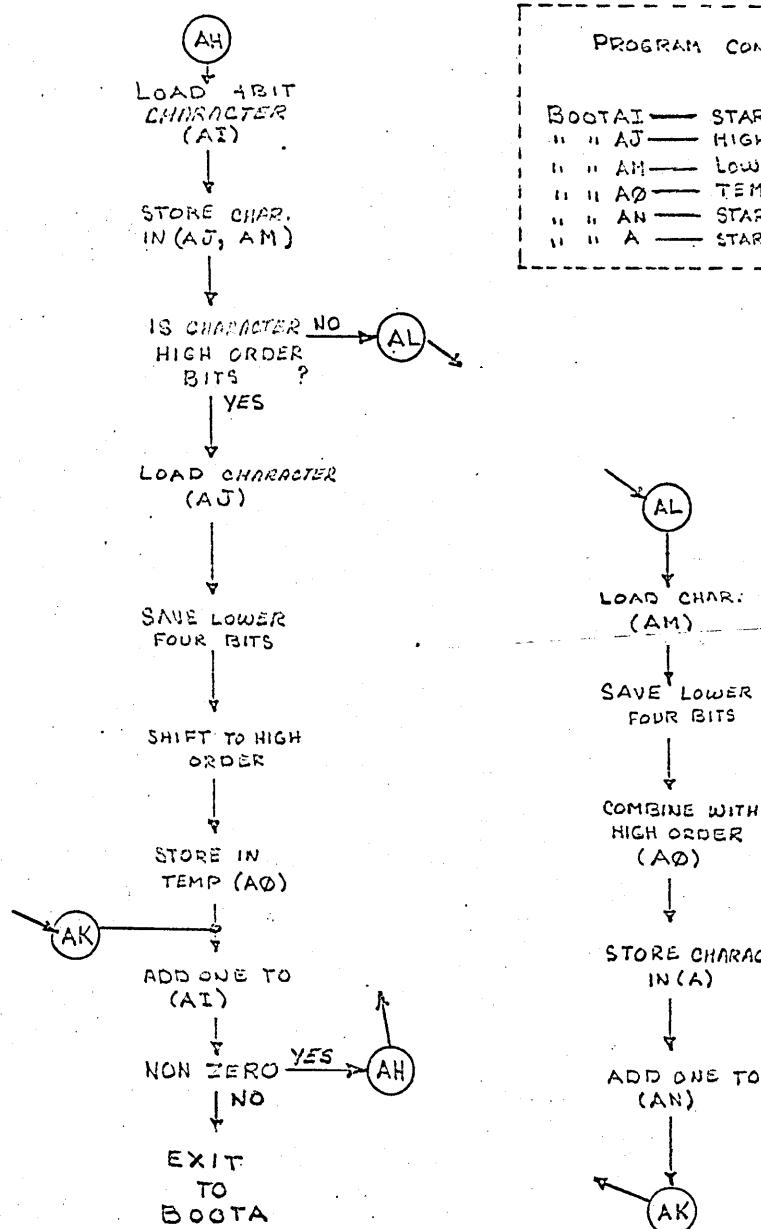


PROGRAM CONTROL WORDS

BOOTAI	START ADDRESS OF FOUR BITS PER WORD
" " AJ	HIGH ORDER OF WORD
" " AM	LOW ORDER OF WORD
" " A0	TEMPORARY STORAGE
" " AN	START ADDRESS OF EIGHT BITS PER WORD
" " A	START OF PROGRAM

PROGRAM NAME

Boota

ASSEMBLES PROGRAMS COPY AND CALL
STORES THEM IN BANK 15

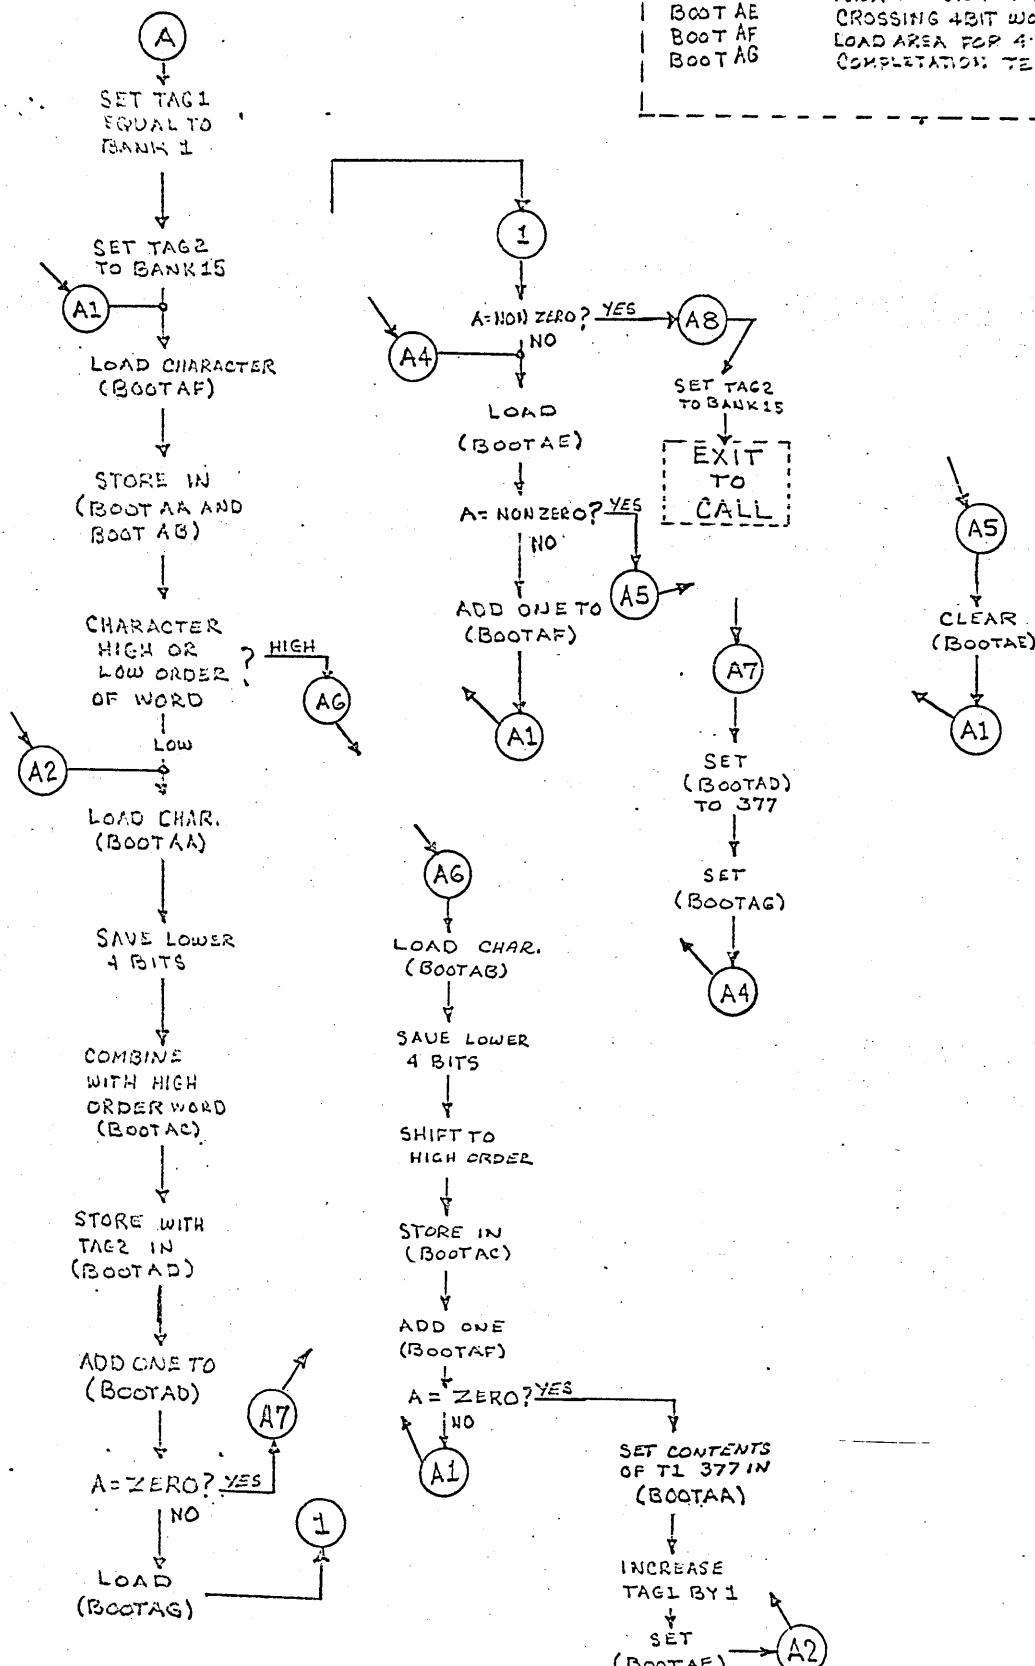

77 Michael

0000

PRG

0

***** PROGRAM NAMES *****
 *
 * BOOTAH
 *
 * 6BIT INSTRUCTION PROGRAM *
 * ASSEMBLES AND 8BIT *
 * INSTRUCTION PROGRAM. *
 * CALLED BOOTA
 *
 * BOOTA
 *
 * 8BIT INSTRUCTION PROGRAM *
 * ASSEMBLES AND 8BIT *
 * INSTRUCTION WORD *
 * STORES THEM IN HIGH *
 * CORE *



0000	0021	BOOTAH	LDM	
0001	0056	BOOTAI	STM	BOOTA
0002	0041		STM	BOOTAJ
0003	0013		LPN	BOOTAM
0004	0041		ZJP	20
0005	0033		LDN	BOOTAL
0006	0010		LPN	** LOAD HIGH ORDER OF WORD
0007	0020			
0010	0060			
0011	0032			
0012	0020			
0013	0000	BOOTAJ		
0014	0010			
0015	0017			17
0016	0001			
0017	0001			
0020	0001			
0021	0001			
0022	0041			
0023	0046			
0024	0055	BOOTAK	RAO	** INCREASE START ADDRESS BY ONE
0025	0001			BOOTAI
0026	0061		NZP	
0027	0000			BOOTAH
0030	0064		UJP	
0031	0056			BOOTA
0032	0020	BOOTAL	LDN	** LOAD LOW ORDER OF WORD
0033	0000	BOOTAM	LPN	** PRESTORED WORD
0034	0010			

0035	0017		I 7
0036	0015	LSM	
0037	0046		BOOTAO
0040	0041	STM	
0041	0056	BOOTAN	BOOTA. ** STORE WORD INCREASE
0042	0055	RAO	STORE AREA BY ONE
0043	0041		BOOTAN
0044	0064	UJP	
0045	0024		BOOTAK.
0046	0000	BOOTAO	** STORE AREA, BUILDING WORD
0047	0000	BOOTAA	** LOWER ORDER OF WORD
0050	0000	BOOTAB	** HIGH ORDER OF WORD
0051	0000	BOOTAC	** STORE AREA, FOR BUILDING WORD
0052	0000	BOOTAD	** AREA FOR STORING WORD
0053	0000	BOOTAE	** CROSSING OF BANK
0054	0000	BOOTAF	** START ADDRESS OF INPUT
0055	0000	BOOTAG	** TEST, FOR COMPLETION
0056	0020	BOOTA.	LDN
0057	0001		I
0060	0102	ATT	TI
0061	0020	LDN	
0062	0015		I5
0063	0202	ATT	T2
0064	0122	BOOTAI	TI ** ADDRESS OF NEXT CHARACTER
0065	0054		BOOTAF
0066	0041	STM	
0067	0047		BOOTAA.
0070	0041	STM	
0071	0050		BOOTAB
0072	0010	LPN	
0073	0020		20
0074	0061	NZP	
0075	0133		BOOTA6
0076	0021	BOOTA2	LDM ** LOWER ORDER OF WORD
0077	0047		BOOTAA
0100	0010	LPN	
0101	0017		I7
0102	0015	LSM	
0103	0051		BOOTAC
0104	0242	BOOTA3.	STI T2 ** STORE BUILT CHARACTER
0105	0052		BOOTAD.
0106	0055	RAO	
0107	0052		BOOTAD.
0110	0060	ZJP	
0111	0165		BOOTA7
0112	0021	LDM	
0113	0055		BOOTAG
0114	0061	NZP	

0115	0175		BOOTA8	
0116	0021	BOOTA4	LDM	** TEST IF CROSSING BANKS
0117	0053		NZP	BOOTAE
0120	0061		RAO	BOOTAS
0121	0126		UJP	BOOTAF
0122	0055		TTA	BOOTAI
0123	0054		STM	** CROSSING OF A BANK
0124	0064		UJP	BOOTAE
0125	0064		TTA	BOOTAS
0126	0003	BOOTAS	STM	0130 0053
0127	0041		UJP	0131 0064
0130	0053		LDM	0132 0064
0131	0064		LPN	0133 0021
0132	0064			** HIGH ORDER OF CHARACTER
0133	0021	BOOTA6		0134 0050
0134	0050			0135 0010
0135	0010			0136 0017
0136	0017			0137 0001
0137	0001			0140 0001
0140	0001			0141 0001
0141	0001			0142 0001
0142	0001			0143 0041
0143	0041			0144 0051
0144	0051			0145 0055
0145	0055			0146 0054
0146	0054			0147 0061
0147	0061			0150 0064
0150	0064			0151 0121
0151	0121			0152 0377
0152	0377			0153 0041
0153	0041			0154 0047
0154	0047			0155 0103
0155	0103			0156 0030
0156	0030			0157 0001
0157	0001			0160 0102
0160	0102			0161 0055
0161	0055			0162 0053
0162	0053			0163 0064
0163	0064			0164 0076
0164	0076			0165 0020
0165	0020	BOOTA7	LDN	** SET STORE AREA TO 377
0166	0377		377	FOR NEXT CHARACTER
0167	0041		STM	0170 0052
0170	0052		RAO	0171 0055
0171	0055		UJP	0172 0055
0172	0055			0173 0064
0173	0064			0174 0116
0174	0116			

0175	0020	BOOTA8	LDN	** SET TAG2 FOR JUMP
0176	0015		I5	EXIT TO PROGRAM CALL
0177	0202		ATT	T2
0200	0264		UJP	T2
0201	7777			CALL

BOOTBH and BOOTB FORMAT

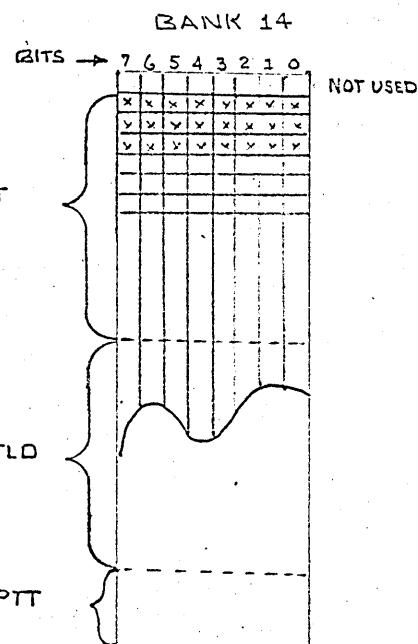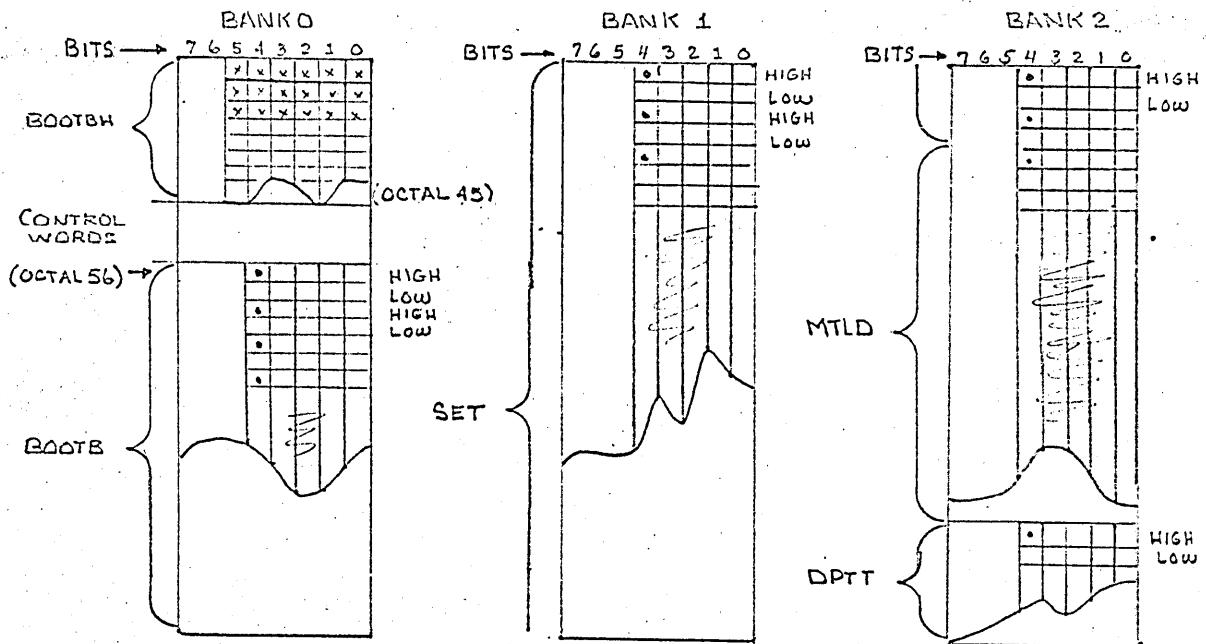

BOOTBH - BANK-0, THE FIRST 45 (OCTAL) LOCATION ARE 6-BIT WORDS.

BANK0 FROM 56 (OCTAL) TO 376 OF BANK 2, THEY ARE
4-BIT WORDS WITH THE HIGH ORDER FOR AN 8-BIT WORD
BEING IDENTIFIED BY BIT POSITION 4.

BANK 14 SET MTLD AND DPTT.

AFTER, THE 4-BIT WORDS ARE ASSEMBLED INTO 8-BIT WORDS.
NOTE: WORD 600 NOT USED.

BOOTBH AND BOOTB

I. Function

A. General

To store the programs, SET, MTLD and part of the DPTT, into bank 14 and then exit to program CALL for the third record of the boot strap.

B. Detail

The BOOT STRAP has three records in its file. Programs BOOTBH and BOOTB, is the second record and becomes loaded into the 8092B core by program CALL, starting with address zero of bank zero. BOOTBH is a set of six bit per word instructions, when executed, it builds a set of eight bit per word instructions from two four bit words. This becomes program BOOTB. BOOTB will take remaining four bit words, combine the high and the low orders, to build an eight bit word and stores them into bank 14. These eight bit words are program instructions belonging to SET, MTLD and DPTT.

Then will exit to program CALL for record three of the BOOT STRAP.

II. Control Tags

TAG 1. Used while combining the high and the low order of each word before storing.

TAG 2. First set to bank 14 to be used while storing programs SET, MTLD and DPTT, then is set for the exit to program CALL.

III. Control Words

BOOTBO Temporary storage for the building of the eight bit word.

BOOTBA Lower order of the eight bit word.

BOOTBB High order of the eight bit word.

BOOTBC Temporary storage for the building of the eight bit word.

BOOTBD Address for storing SET, MTLD and DPTT.

BOOTBE Crossings of a bank.

BOOTBF Starting address of the four bit words.

BOOTBG Flag Test for completion of storing SET, MTLD and DPTT to their proper bank.

IV. Entry Point

BOOTBH




V. Exits

To program CALL

PROGRAM NAME

BootBH

IT ASSEMBLES A PROGRAM TO WORK WITH TAGS

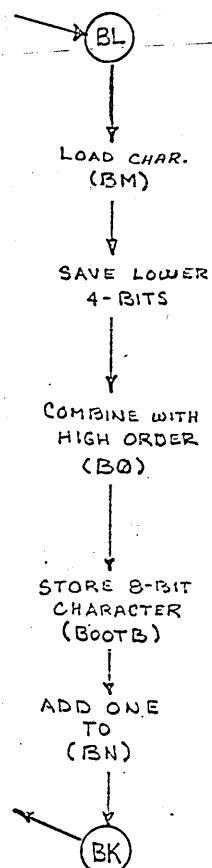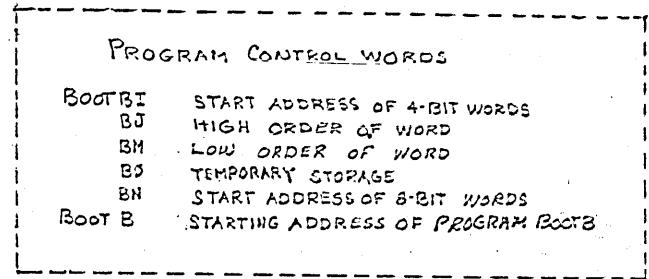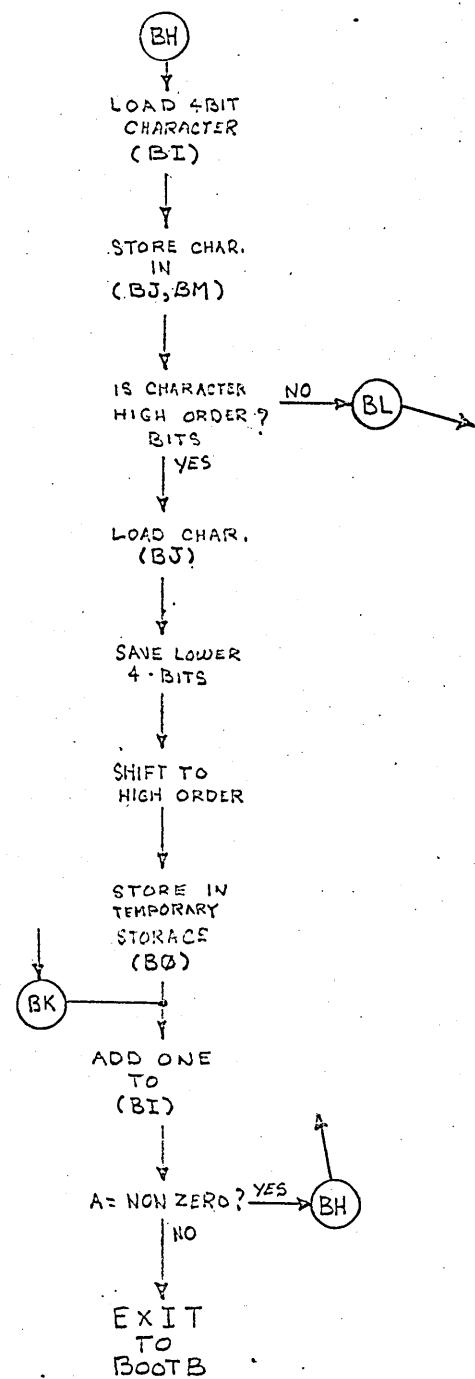


PROGRAM NAME

BOOTB

ASSEMBLES PROGRAMS SET AND MTLD.
STORES THEM IN BANK 16

PROGRAM CONTROL WORDS

BOOTBA	LOW ORDER OF 4-BIT WORD
BOOTBB	HIGH ORDER OF 4-BIT WORD
BOOTBC	TEMPORARY STORING BUILDING WORD
BOOTBD	AREA FOR STORING 8-BIT WORD
BOOTBE	CROSSING A 4-BIT WORD BANK
BOOTBF	LOAD AREA FOR 4-BIT WORDS
BOOTBG	COMPLETION TEST

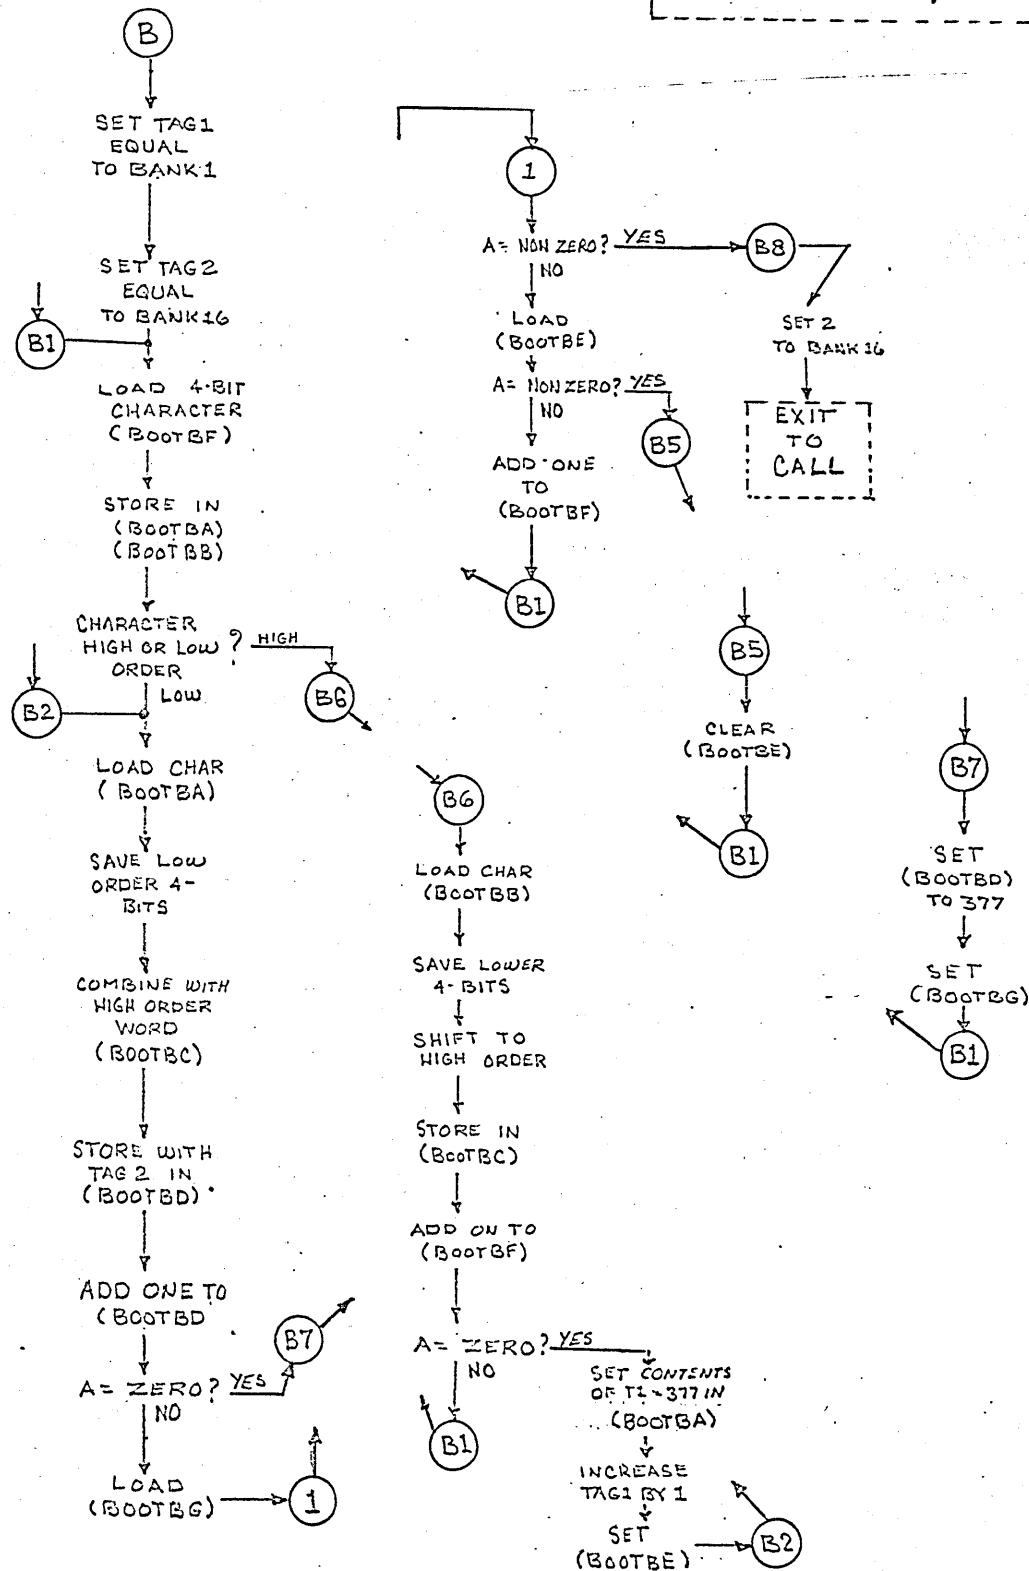

n. nicholas

0000 PRG 0

***** PROGRAM NAMES *****
 *
 * BOOTBH *
 *
 * 6BIT INSTRUCTION PROGRAM *
 * ASSEMBLES AND 8BIT *
 * INSTRUCTION PROGRAM *
 * CALLED BOOTB *
 *
 * BOOTB *
 *
 * 8BIT INSTRUCTION PROGRAM *
 * ASSEMBLES AND 8BIT *
 * INSTRUCTION WORD *
 * STORES THEM IN HIGH *
 ***** CORE *****


0000	0021	BOOTBH	LDM	
0001	0056	BOOTBI	STM	BOOTB
0002	0041		STM	BOOTBJ
0003	0013		STM	BOOTBM
0004	0041		LPN	20
0005	0033		ZJP	
0006	0010		LDN	BOOTBL
0007	0020			** LOAD HIGH ORDER OF WORD
0010	0060			
0011	0032			
0012	0020			
0013	0000	BOOTBJ	LPN	
0014	0010			17
0015	0017			
0016	0001			SHA
0017	0001			SHA
0020	0001			SHA
0021	0001			SHA
0022	0041			STM
0023	0046			BOOTBO
0024	0055	BOOTBK	RAO	** INCREASE START ADDRESS BY ONE
0025	0001			BOOTBI
0026	0061			NZP
0027	0000			BOOTBH
0030	0064			UJP
0031	0056			BOOTB
0032	0020	BOOTBL	LDN	** LOAD LOW ORDER OF WORD
0033	0000	BOOTBM		** PRESTORED WORD
0034	0010		LPN	

0035	0017		I 7
0036	0015	LSM	
0037	0046		BOOTBO
0040	0041	STM	
0041	0056	BOOTBN	BOOTB ** STORE WORD, INCREASE
0042	0055	RAO	STORE AREA BY ONE
0043	0041		BOOTBN
0044	0064	UJP	
0045	0024		BOOTBK
0046	0000	BOOTBO	** STORE AREA FOR BUILDING WORD
0047	0000	BOOTBA	** LOWER ORDER OF WORD
0050	0000	BOOTBB	HIGH ORDER OF WORD
0051	0000	BOOTBC	** STORE AREA FOR BUILDING WORD
0052	0000	BOOTBD	** AREA FOR STORING WORD
0053	0000	BOOTBE	** CROSSING OF BANK
0054	0000	BOOTBF	** START ADDRESS OF INPUT
0055	0000	BOOTBG	** TEST FOR COMPETATION
0056	0020	BOOTB	
0057	0001	LDN	
0060	0102	ATT	I
0061	0020	LDN	T1
0062	0016		16
0063	0202	ATT	T2
0064	0122	BOOTBI	LDI T1 ** ADDRESS OF NEXT CHARACTER
0065	0054		BOOTBF
0066	0041	STM	
0067	0047		BOOTBA
0070	0041	STM	
0071	0050		BOOTBB
0072	0010	LPN	
0073	0020		20
0074	0061	NZP	
0075	0133		BOOTB6
0076	0021	BOOTB2	LDM ** LOWER ORDER OF WORD
0077	0047		BOOTBA
0100	0010	LPN	
0101	0017		I 7
0102	0015	LSM	
0103	0051		BOOTBC
0104	0242	BOOTB3	STI T2 ** STORE BUILT CHARACTER
0105	0052		BOOTBD
0106	0055	RAO	
0107	0052		BOOTBD
0110	0060	ZJP	
0111	0165		BOOTB7
0112	0021	LDM	
0113	0055		BOOTBG
0114	0061	NZP	

0115	0175		BOOTB8	
0116	0021	BOOTB4	LDM	** TEST IF CROSSING BANK
0117	0053		NZP	
0120	0061		RAO	BOOTB5
0121	0126		UJP	BOOTBF
0122	0055			BOOTBI
0123	0054			** CROSSING OF BANK
0124	0064			
0125	0064			
0126	0003	BOOTB5	TTA	
0127	0041		STM	BOOTBE
0130	0053			UJP
0131	0064			BOOTBI
0132	0064			** HIGH ORDER OF CHARACTER
0133	0021	BOOTB6	LDM	BOOTBB
0134	0050			LPN
0135	0010			17
0136	0017			SHA
0137	0001			SHA
0140	0001			SHA
0141	0001			SHA
0142	0001			STM
0143	0041			BOOTBC
0144	0051			RAO
0145	0055			BOOTBF
0146	0054			NZP
0147	0061			BOOTBI
0150	0064			LDM
0151	0121			TI
0152	0377			377
0153	0041			STM
0154	0047			BOOTBA
0155	0103			TTA
0156	0030			TI
0157	0001			ADN
0160	0102			I
0161	0055			ATT
0162	0053			TI
0163	0064			RAO
0164	0076			BOOTBE
0165	0020	BOOTB7	UJP	BOOTB2
0166	0377			LDN
0167	0041			377
0170	0052			** SET STORE AREA TO 377
0171	0055			FOR NEXT CHARACTER
0172	0055			STM
0173	0064			BOOTBD
0174	0116			RAO
				BOOTBG
				BOOTB4

0175	0020	BOOT88	LDN	** SET TAG2 FOR JUMP
0176	0015		I5	EXIT TO PROGRAM CALL
0177	0202		ATT	T2
0200	0264		UJP	T2
0201	7777			CALL

BOOTCH and BOOTC FORMAT

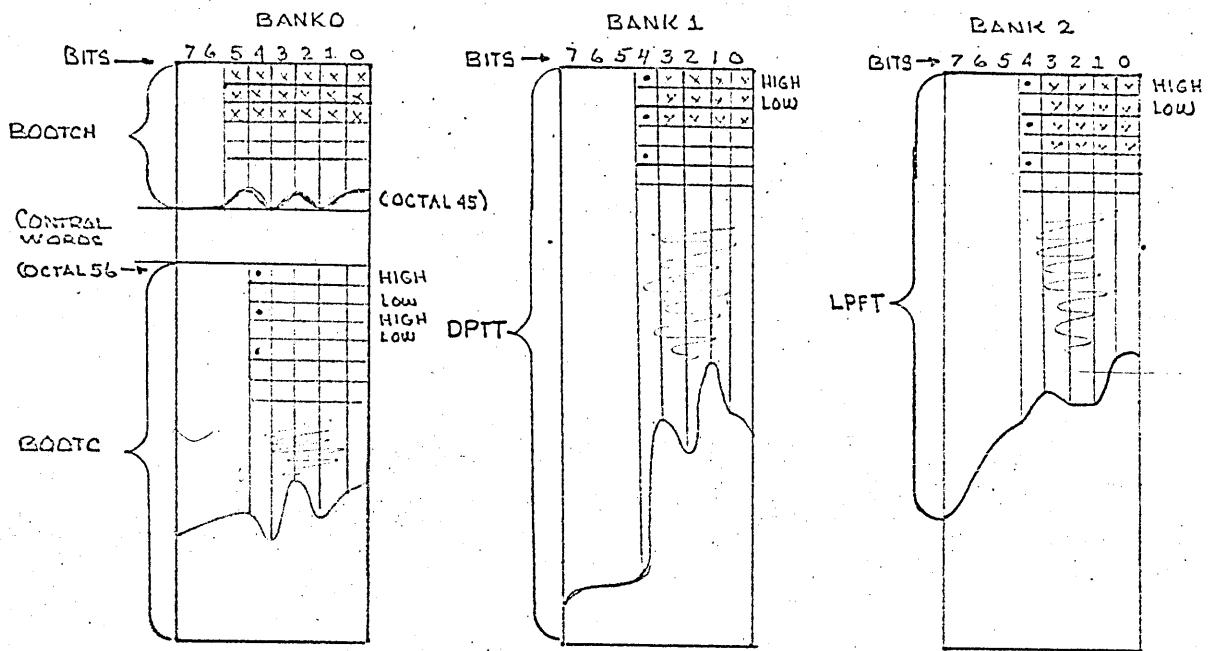

BOOTCH BANK-0 THE FIRST 45 (OCTAL) LOCATIONS ARE 6-BIT WORDS.
 BANKO, FROM 56(OCTAL) TO 376 OF BANK 2, THEY ARE 4-BIT WORDS WITH THE HIGH ORDER FOR AN 8-BIT WORD BEING IDENTIFIED BY BIT POSITION 4.

BANK 15 DPTT LPFT I/O AREA
 AFTER, THE 4-BIT WORDS ARE ASSEMBLED INTO 8-BIT WORDS

BOOTCH AND BOOTC

I. Function

A. General

To store the remaining part of the program DPTT along with the program LDFT into bank 15, then will exit to Program CALL.

B. Detail

BOOTCH and BOOTC is the last record of the BOOT STRAP which was loaded into the 8092B core by program CALL starting with address zero of bank zero.

BOOTCH is a set of six bit per word instructions, when executed, it builds a set of eight bit per word instructions from two four bit words. This becomes program BOOTC.

BOOTC will take remaining four bit words, combine the high and the low orders to build and eight bit word and stores them into bank 15. These eight bit words are program instructions belonging to DPTT and LPFT. Then it will exit to program CALL.

II. Control Tags

TAG 1. Used while combining the high and the low order of each word before storing.

TAG 2. First set to bank 15 to be used while storing programs DPTT and LPFT, then set for the exit to program CALL.

III. Control Words

BOOTCO Temporary storage for the building of the eight bit word.

BOOTCA Lower order of the eight bit word.

BOOTCB High order of the eight bit word.

BOOTCC Temporary storage for the building of the eight bit word.

BOOTCD Address for storing DPTT and LPFT.

BOOTCE Crossings of a bank.

BOOTCF Starting address of the four bit words.

BOOTCG Flag test for completion of storing DPTT and LPFT to their proper bank.

IV. Entry Point

BOOTCH




V. Exits

To program CALL

PROGRAM NAME

Boatch

IT ASSEMBLES A PROGRAM TO WORK WITH TAGS

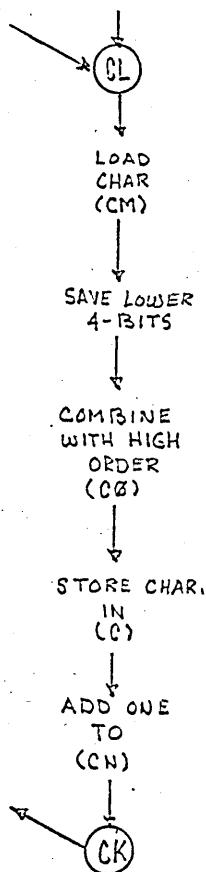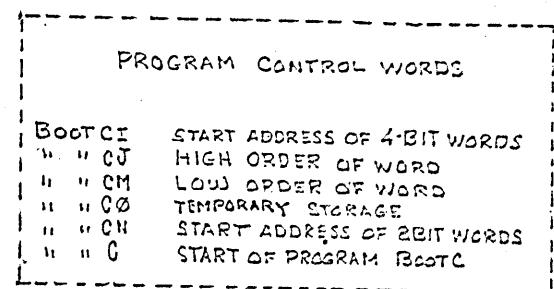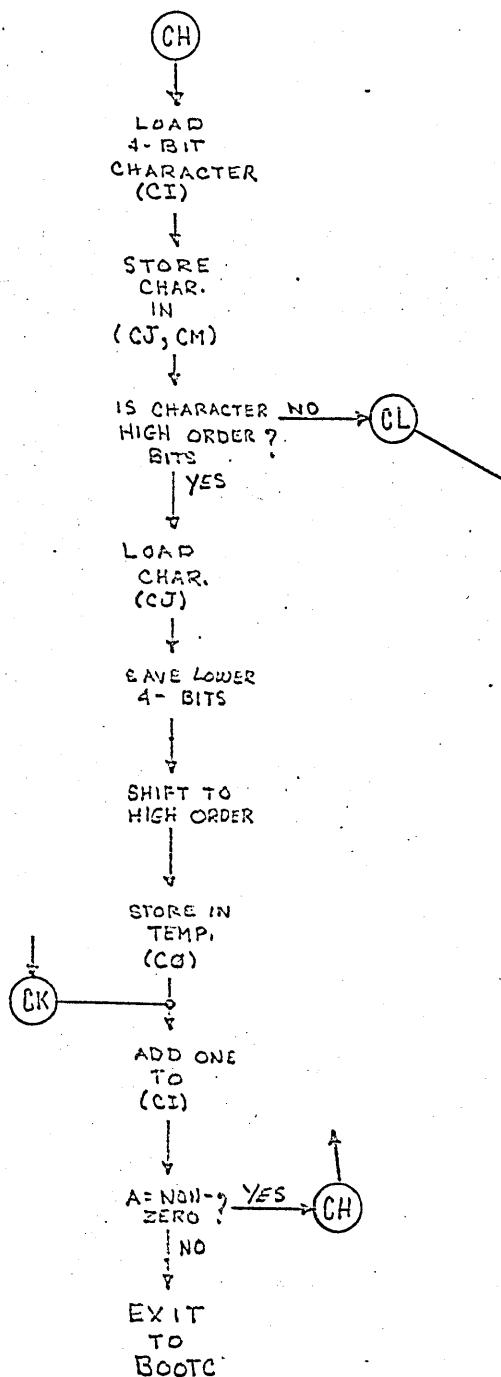


Tr. 720cholas

PROGRAM NAME

Boote

ASSEMBLES PROGRAMS DPTT AND LDFT
STORES THEM IN BANK 17

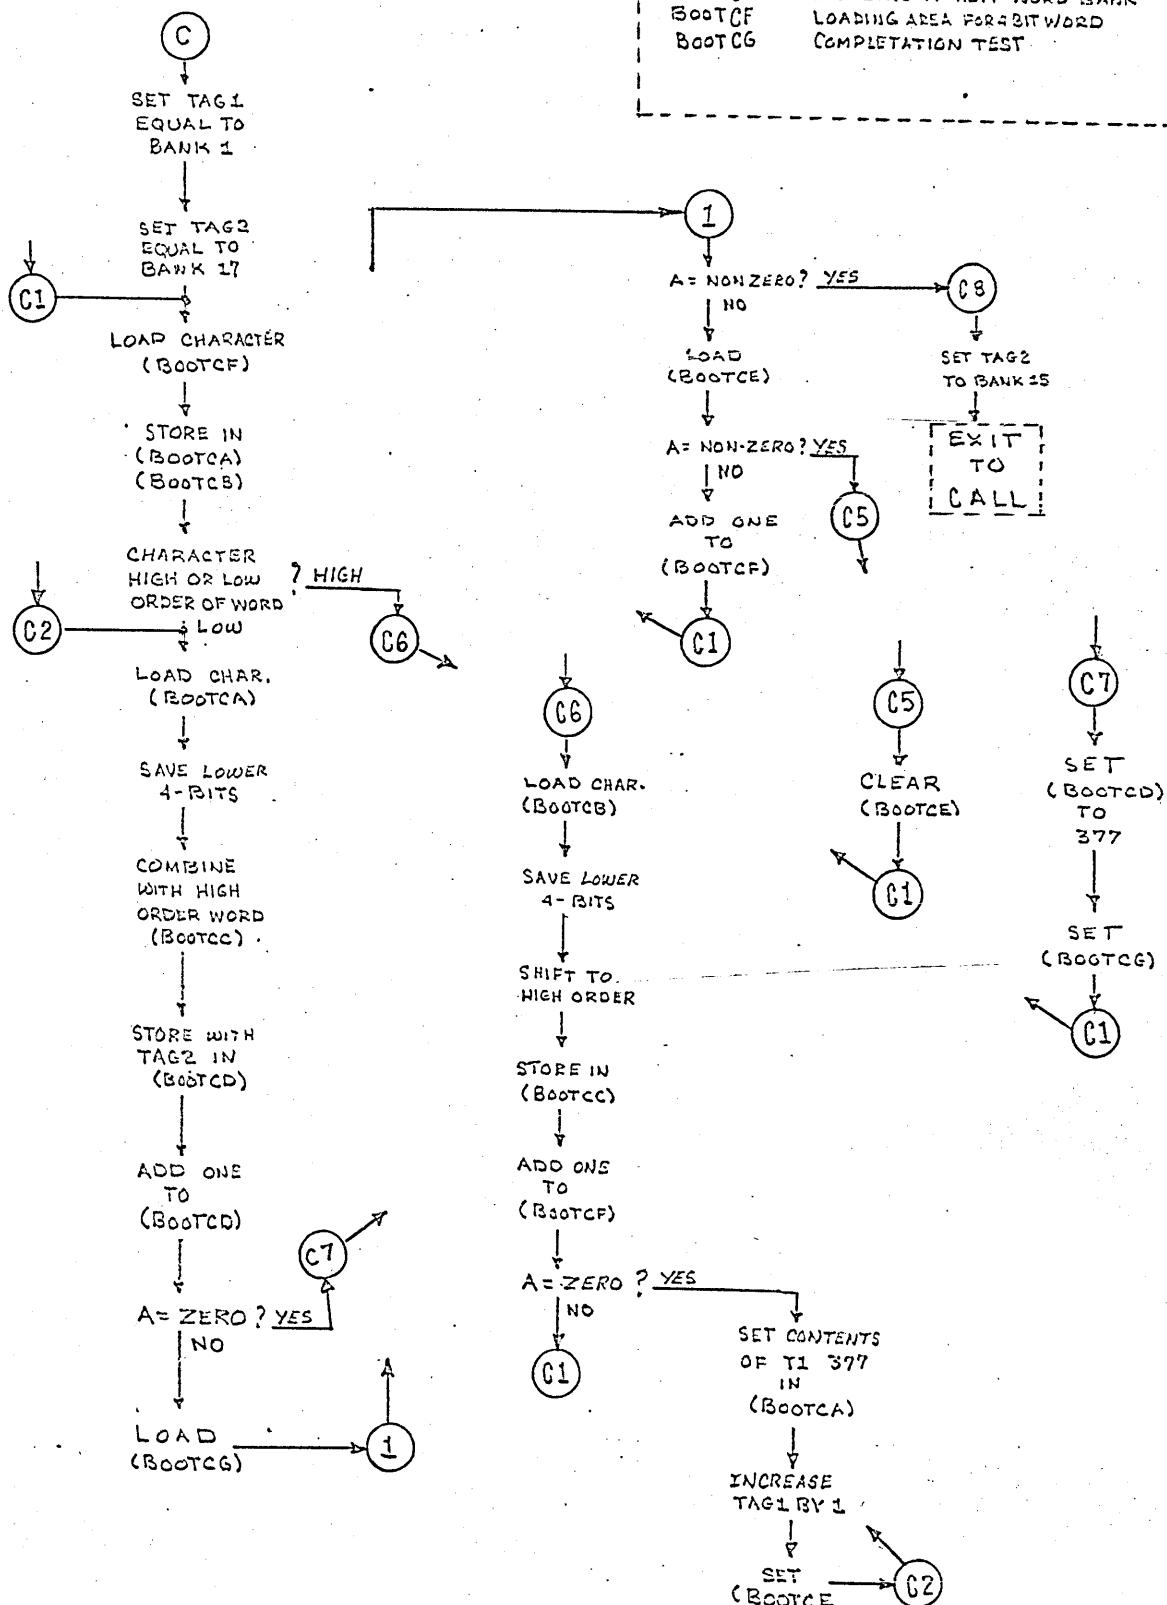

72.72ichol25

0000 PRG 0

***** PROGRAM NAMES *****
 *
 * BOOTCH.
 *
 * 6BIT INSTRUCTION PROGRAM *
 * ASSEMBLES AND 8BIT *
 * INSTRUCTION PROGRAM *
 * CALLED BOOTC
 *
 * BOOTC
 *
 * 8BIT INSTRUCTION PROGRAM *
 * ASSEMBLES AND 8BIT *
 * INSTRUCTION WORD *
 * STORES THEM IN HIGH *
 * CORE. *****

0000	0021	BOOTCH	LDM
0001	0056	BOOTCI	STM
0002	0041		BOOTCJ
0003	0013		BOOTCM
0004	0041		LPN
0005	0033		ZJP
0006	0010		LDN
0007	0020		
0010	0060		
0011	0032		
0012	0020		
0013	0000	BOOTCJ	
0014	0010		
0015	0017		
0016	0001		
0017	0001		
0020	0001		
0021	0001		
0022	0041		
0023	0046		
0024	0055	BOOTCK	RAO
0025	0001		BOOTCI
0026	0061		NZP
0027	0000		BOOTCH
0030	0064		UJP
0031	0056		LDN
0032	0020	BOOTCL	
0033	0000		BOOTCM
0034	0010		LPN

*** LOAD HIGH ORDER WORD

17

*** INCREASE START ADDRESS BY ONE

*** LOAD LOW ORDER OF WORD

*** PRESTORED WORD

0035	0017		I7
0036	0015	LSM	
0037	0046		BOOTCO
0040	0041	STM	
0041	0056	BOOTCN	BOOTC ** STORE WORD INCREASE
0042	0055		STORE AREA BY ONE
0043	0041	RAO	
0044	0064		BOOTCN
0045	0024	UJP	
0046	0000		BOOTCK
0047	0000	BOOTCO	** STORE AREA FOR BUILDING WORD
0050	0000	BOOTCA	** LOWER ORDER OF WORD
0051	0000	BOOTCB	** HIGH ORDER OF WORD
0052	0000	BOOTCC	** STORE AREA FOR BUILDING WORD
0053	0000	BOOTCD	** AREA FOR STORTING WORD
0054	0000	BOOTCE	** CROSSING A BANK
0055	0000	BOOTCF	** START ADDRESS OF INPUT
0056	0020	BOOTCG	** TEST FOR COMPLETATION
0057	0001	BOOTC	
0060	0102	LDN	
0061	0020		I
0062	0017	ATT	TI
0063	0202		
0064	0122	BOOTCI	LDN
0065	0054		I7
0066	0041	ATT	T2
0067	0047		TI
0070	0041	LDI	** ADDRESS OF NEXT CHARACTER
0071	0050		BOOTCF
0072	0010	STM	
0073	0020		BOOTCA
0074	0061	LPN	
0075	0133		BOOTCB
0076	0021	BOOTC2	20
0077	0047	LDM	
0100	0010		BOOTC6
0101	0017	BOOTCA	** LOWER ORDER OF WORD
0102	0015	LPN	
0103	0051		BOOTCA
0104	0242	BOOTC3	17
0105	0052	LSM	
0106	0055		BOOTCC
0107	0052	STI	T2 ** STORE BUILT CHARACTER
0110	0060		BOOTCD
0111	0165	RAO	
0112	0021		BOOTCD
0113	0055	ZJP	
0114	0061		BOOTCE
		LDM	
			BOOTCG
		NZP	

0115	0175		BOOTC8	
0116	0021	BOOTC4	LDM	** TEST IF CROSSING BANKS
0117	0053		NZP	BOOTCE
0120	0061		RAO	BOOTCS
0121	0126		UJP	BOOTCF
0122	0055			BOOTCI
0123	0054			** CROSSING OF A BANK
0124	0064			
0125	0064			
0126	0003	BOOTCS	TTA	
0127	0041		STM	BOOTCE
0130	0053		UJP	BOOTCI
0131	0064			** HIGH ORDER OF CHARACTER
0132	0064			
0133	0021	BOOTC6	LDM	BOOTCB
0134	0050		LPN	17
0135	0010			
0136	0017			
0137	0001		SHA	
0140	0001		SHA	
0141	0001		SHA	
0142	0001		SHA	
0143	0041		STM	
0144	0051		RAO	BOOTCC
0145	0055			BOOTCF
0146	0054		NZP	BOOTCI
0147	0061		LDM	TI
0150	0064		0121	377
0151	0121		STM	
0152	0377		TTA	BOOTCA
0153	0041		ADN	TI
0154	0047			
0155	0103			
0156	0030		ATT	
0157	0001		RAO	TI
0160	0102			
0161	0055		BOOTCE	
0162	0053		UJP	
0163	0064			BOOTC2
0164	0076		LDN	** SET STORE AREA TO 377
0165	0020	BOOTC7	377	FOR NEXT CHARACTER
0166	0377		STM	
0167	0041		RAO	BOOTCD
0170	0052		UJP	BOOTCG
0171	0055			BOOTC4
0172	0055			
0173	0064			
0174	0116			

0175	0020	BOOTC8	LDN	** SET TAG2 FOR JUMP
0176	0015		I5	EXIT TO PROGRAM CALL
0177	0202		ATT	T2
0200	0264		UJP	T2
0201	7777			CALL

PROGRAM COPY

FORMAT

AUTOMATIC LOAD AND DUMP TAPE
RECORD NO. 1

BOOTAH	BOOTA	PROGRAMS, COPY AND CALL
--------	-------	-------------------------


BOOT
STRAP
FILE

RECORD NO. 2

BOOTBH	BOOTB	PROGRAMS, SET, MTLD AND PART OF DATT
--------	-------	--------------------------------------

RECORD NO. 3

BOOTCH	BOOTC	PROGRAMS, DPTT AND LPFT	INPUT OUTPUT AREA
--------	-------	-------------------------	-------------------------

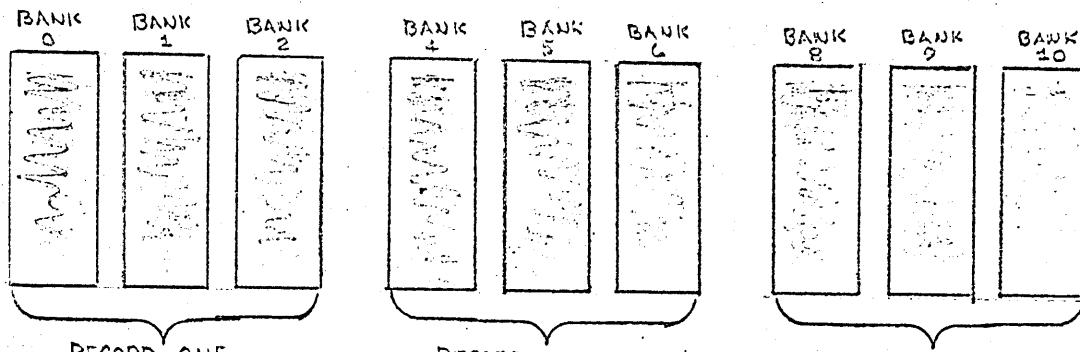

FROM → AUTOMATIC LOAD AND DUMP TAPE

READS RECORD ONE INTO BANKS 0, 1 AND 2. READS RECORD TWO INTO BANKS 4, 5 AND 6.
READS RECORD THREE INTO BANKS 8, 9 AND 10.

TO NEW MAGNETIC TAPE

OUTPUTS BANKS 0, 1 AND 2 (RECORD ONE) OUTPUTS BANKS 4, 5 AND 6 (RECORD TWO)
OUTPUTS BANKS 8, 9 AND 10 (RECORD THREE). WRITES EOF AND CODE MARK (77)

THE TAPE IS NOW AN AUTOMATIC LOAD AND DUMP TAPE.

72 9/1972

COPY

I. Function

A. General

Generates the BOOT STRAP for a new Automatic Load and Dump Tape.

B. Detail

Reads the three records of the BOOT STRAP into the 8092B core on the buffer channel. Record one of the BOOT STRAP is stored starting with zero of bank 0, to word 377 of bank 2. Record two is stored starting with word zero of bank 4, to word 377 of bank 6. Record three is stored starting with word zero of bank 8, to word 377 of bank 10. Then the program halts, so a new tape can be mounted on unit 3.

COPY writes the three records (which were stored into the 8092B core) on the buffer channel to the magnetic tape, that was mounted on unit 3, in the same sequence that they were inputted. Then it writes an end of file mark and code mark (77 octal). This tape is now a new Automatic Load and Dump Tape.

II. TAGS

TAG1 NOT USED.

TAG2 Programs execution tag.

TAG3 Used for input and output of the BOOT STRAP.

III. CONTROL WORDS

COPY A Counter for parity error while reading or writing.

COPY B Times counter of 3, for input and output.

COPY C Times counter of 2, for input and outputting the three records, just once.

COPY 4 Prestored number to increase Tag 3.

COPY 7 Prestored code for reading or writing.

COPY 8 Prestored code for inputting or outputting.

IV. ENTRY POINTS

COPY Entry point for program CALL.


EXIT

NONE.

PROGRAM NAME

COPY

COPY BOOT STRAP ON TAPE

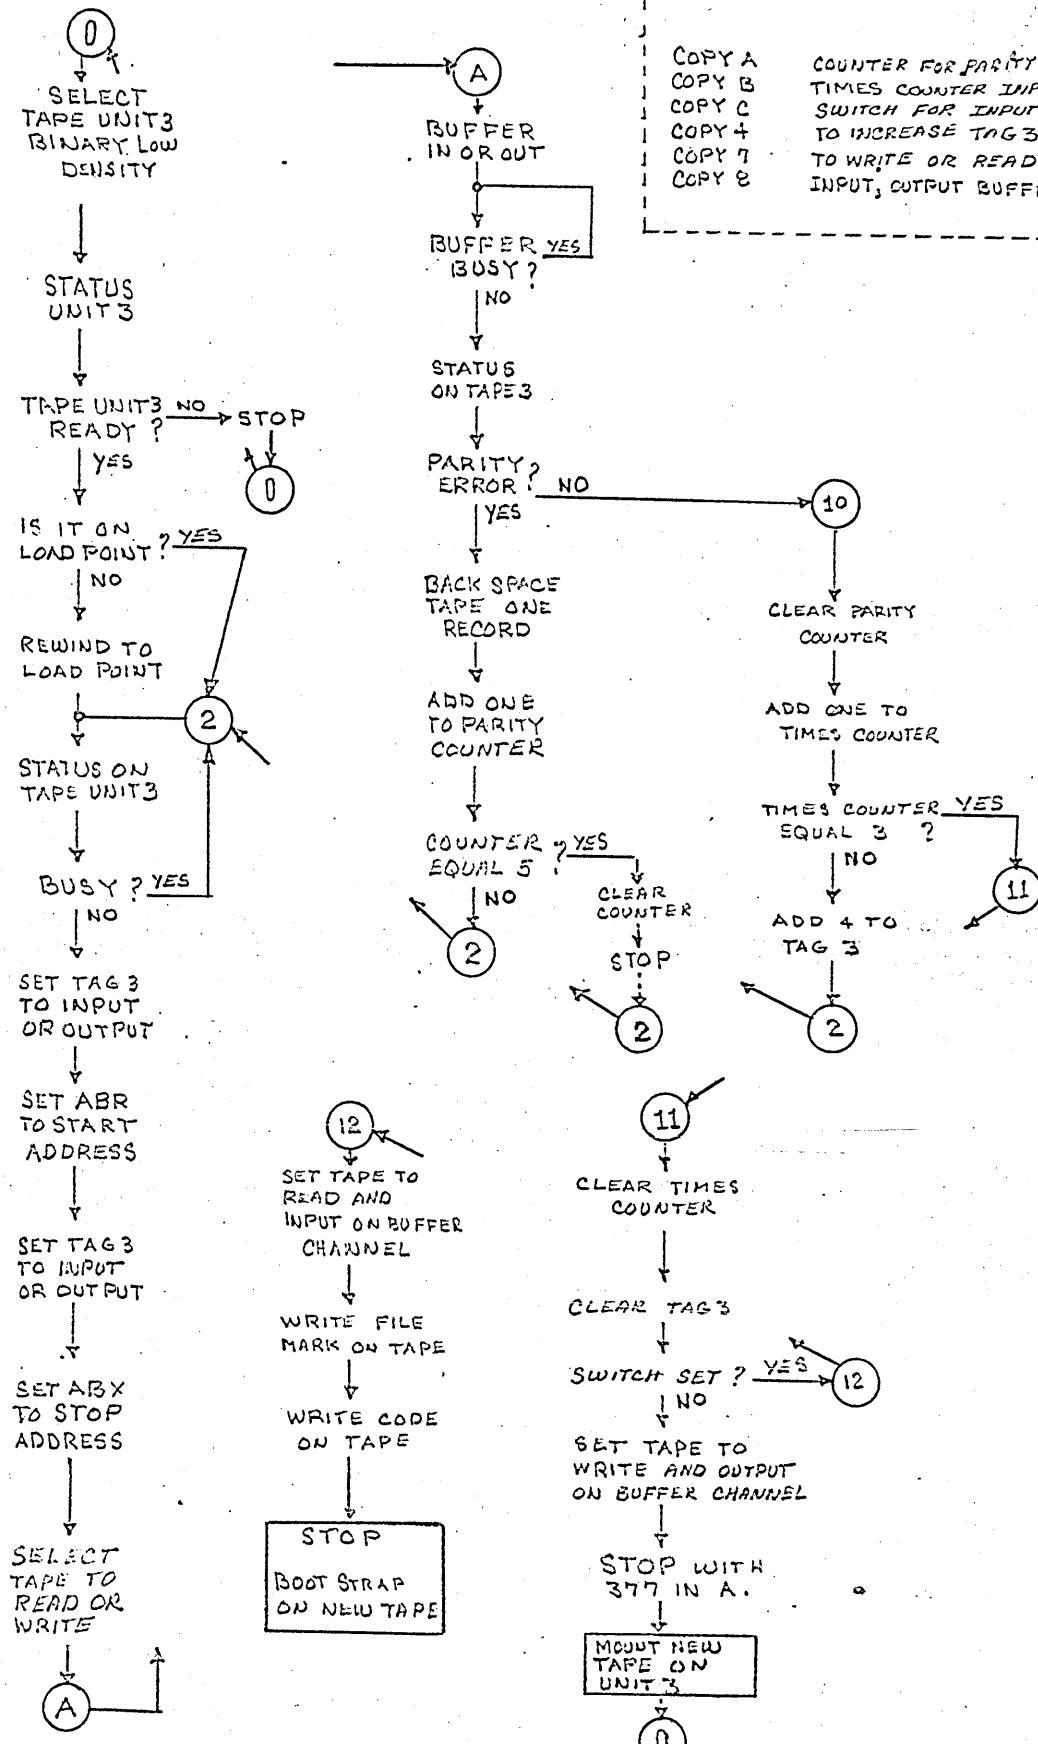

PROGRAM CONTROL WORDS

COPY A
COPY B
COPY C
COPY D
COPY E
COPY F

COUNTER FOR PARITY ERRORS
TIMES COUNTER INPUT, OUTPUT
SWITCH FOR INPUT OUTPUT
TO INCREASE TAG 3
TO WRITE OR READ DATA
INPUT, OUTPUT BUFFER CHANNEL

SUPB
PRG 6400

*** PROGRAM NAME ***
* COPY
* IT GENERATES THE *
* BOOT STRAP ON A *
* NEW TAPE

6400	0075	COPY	EXF	
6401	0013			TAPE3
6402	0011			SOL
6403	0075		EXF	
6404	0013			TAPE3
6405	0000			RSO
6406	0076		INA	
6407	0010		LPN	
6410	0042			42
6411	0034		SBN	
6412	0040			40
6413	0260		ZJP	T2
6414	6427			COPY2
6415	0030		ADN	
6416	0040			40
6417	0260		ZJP	T2
6420	6424			COPY1
6421	0077		HLT	
6422	0264		UJP	T2
6423	6400			COPY
6424	0075	COPY1	EXF	**TAPE UNIT 3 NOT READY **REWIND TAPE UNIT 3 LOAD POINT
6425	0013			TAPE3
6426	0034			RWL
6427	0075	COPY2	EXF	**TAKE STATUS OF TAPE UNIT 3
6430	0013			TAPE3
6431	0000			RSO
6432	0076		INA	
6433	0263		NJP	T2
6434	6427			COPY2
6435	0020		LDN	
6436	0000	COPY4	O	**SET T3 FOR INPUT OUTPUT F.W.T.
6437	0302		ATT	T3
6440	0020		LDN	
6441	0000			O
6442	0204	COPY5	ABR	**IF BUSY, KEEP TRYING TO ENTER STAR
6443	6442			COPY5 ADDRESS FOR INPUT OR OUTPUT

6444	0303		TTA	T3
6445	0030		ADN	
6446	0003			3
6447	0302		ATT	T3
6450	0020		LDN	
6451	0002			2
6452	0205	COPY6	ABX	T2 **IF BUSY, KEEP TRYING TO ENTER STOP
6453	6452			COPY6 ADDRESS FOR INPUT OR OUTPUT
6454	0075		EXF	
6455	0013			TAPE3
6456	0024	COPY7	READ	**THIS CHANGES TO READ AND WRITE
6457	0270	COPY8	IBI	T2 **THIS CHANGES TO INPUT OR OUTPUT
6460	6457			COPY8
6461	0020		LDN	BUFFER CHANNEL IBI, IBO
6462	0000			0
6463	0204	COPY9	ABR	T2 **TEST POINT FOR COMPLETION OF BUFFER
6464	6463			COPY9
6465	0075		EXF	
6466	0013			TAPE3
6467	0000			RSO
6470	0076		INA	
6471	0010		LPN	
6472	0004			4
6473	0260		ZJP	T2
6474	6513			COPY10
6475	0075		EXF	
6476	0013			TAPE3
6477	0031			SBR
6500	0255		RAO	T2
6501	6606			COPYA
6502	0034		SBN	
6503	0005			5
6504	0261		NZP	T2
6505	6427			COPY2
6506	0241		STM	T2
6507	6606			COPYA
6510	0077		HLT	
6511	0264		UJP	T2
6512	6427			COPY2
6513	0241	COPY10	STM	T2 **CLEAR PARITY CHECK COUNTER
6514	6606			COPYA
6515	0255		RAO	T2
6516	6607			COPYB
6517	0034		SBN	
6520	0003			3
6521	0260		ZJP	T2
6522	6531			COPY11
6523	0020		LDN	

6524	0004		4
6525	0251	RAM	T2
6526	6436		COPY4
6527	0264	UJP	T2
6530	6427		COPY2
6531	0241	COPYII	STM T2 **CLEAR TIMES COUNTER, FOR INPUT
6532	6607		COPYB ON OUTPUT
6533	0241	STM	T2
6534	6436		COPY4
6535	0221	LDM	T2
6536	6610		COPYC
6537	0001	SHA	
6540	0241	STM	T2
6541	6610		COPYC
6542	0263	NJP	T2
6543	6564		COPY12
6544	0020	LDN	
6545	0271	IBO	T2
6546	0241	STM	T2
6547	6457		COPY8
6550	0020	LDN	
6551	0020		WRT
6552	0241	STM	T2
6553	6456		COPY7
6554	0075	EXF	
6555	0013		TAPE3
6556	0035		RWU
6557	0020	LDN	
6560	0377		377
6561	0077	HLT	**PUT NEW TAPE ON UNIT 3 AND RUN
6562	0264	UJP	T2
6563	6400		COPY
6564	0020	COPY12	LDN **SET COPY 4 TO INPUT ON BUFFER
6565	0270		IBI
6566	0241		T2
6567	6457	STM	T2
6570	0020		COPY8
6571	0024	LDN	
6572	0241		READ
6573	6456	STM	T2
6574	0075		COPY7
6575	0013	EXF	
6576	0021		TAPE3
6577	0075		WFM
6600	0013	EXF	
6601	0020		TAPE3
6602	0074		WRT
6603	0077	OTN	
			77

6604	0003	TTA	
6605	0077	HLT	**BOOT STRAP ON NEW TAPE UNIT 3
6606	0000	COPYA	**COUNTER FOR PARITY CHECK
6607	0000	COPYB	**TIMES COUNTER FOR INPUT OUTPUT
6610	0252	COPYC	**SWITCH FOR READING OR WRITING
		252	

PROGRAM CALL FORMAT

AUTOMATIC LOAD AND DUMP TAPE

RECORD 1


BOOTAH 6-BIT WORDS	BOOTA 4-BIT WORDS	PROGRAMS COPY AND CALL 4-BIT WORDS
-----------------------	----------------------	---------------------------------------

RECORD 2

BOOTBH 6-BIT WORDS	BOOTB 4-BIT WORDS	PROGRAMS SET MTLD AND PART OF DPTT 4-BIT WORDS
-----------------------	----------------------	---

RECORD 3

BOOTCH 6-BIT WORDS	BOOTC 4-BIT WORDS	PROGRAM DPTT AND LDFT 4-BIT WORDS	INPUT OUTPUT AREA
-----------------------	----------------------	--------------------------------------	-------------------------

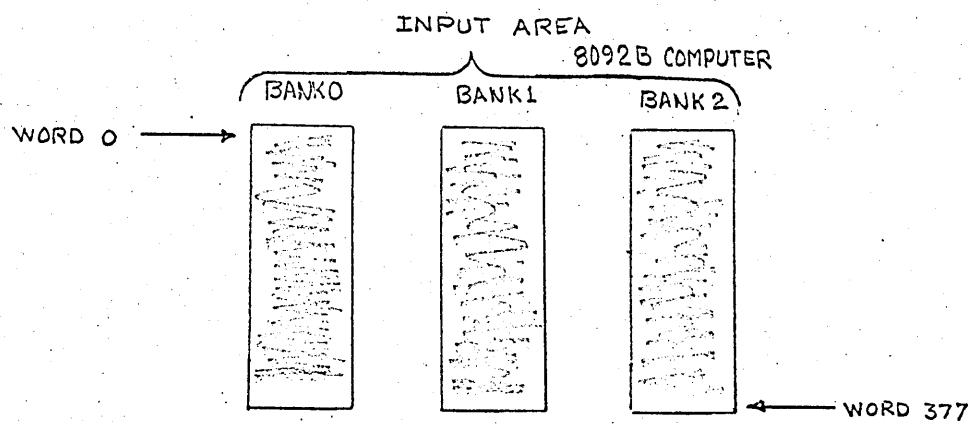

RECORD TWO IS INPUTTED FIRST THEN PROCESSED BY PROGRAM BOOTBH.
RECORD THREE IS INPUTTED AND PROCESSED BY PROGRAM BOOTCH.

BOTH RECORDS START IN BANK0 WORD 0 AND END IN BANK2 WORD 377.

CALL

I. Function

A. General

CALL brings in records two and three of the BOOT STRAP into the 8092B Core for processing.

B. Detail

The buffer channel is used to input the records. The input area starts with word zero of bank zero and ends with word 377 octal of bank two. Record two is inputed first, then CALL releases control to BOOTBH for the processing of record two from the BOOTSTRAP file.

When the processing of record two is completed BOOTBH will return control back to program CALL. CALL will input record three of the BOOT STRAP in the same manner as record two. Control is than returned to BOOTCH for the processing of record three. BOOTCH will return control to program CALL when the processing is completed.

A parity check is made on both of the records. CALL then comes to a halt to indicate that the BOOT STRAP is now loaded and ready for its job assignments. The job assignment are indicated by entering a parameter in to the A-REGISTER.

The parameter is divided into four bit indicators. The high order four bits are for coping the BOOT STRAP or to dump a program from the 8092B Core to the Automatic Load and Dump Tape. The low order bits indicates the file number on the Automatic Load and Dump Tape either for the loading or the dumping of the 8092B core.

DUMP	
OR	FILE
COPY	NUMBER
HIGH	LOW

Parameter job assignments

17

0

Generates a new Automatic Load any Dump Tape,

XX

0

} Dumping of the 8092B Core to the Automatic Load and Dump Tape,

XX

YY

0 YY Loading the 8092B core from the Automatic Load and Dump Tape.

II. TAGS

- TAG1 Exit tag to programs BOOTBH and BOOTCH
- TAG2 Programs execution tag, also exit tag to Programs SET and COPY
- TAG3 Records two and three input tag.

III. Control Words

- CALLA Switch Counter for inputting only two records
- CALLB Parity error counter
- CALL10 Job assignment word.

IV. Entry Point

CALL

V. Exits

- BOOTBH
- BOOTCH
- SET
- COPY


PROGRAM NAME

CALL

CALL BOAT STRAPS 2 and 3

PROGRAM CONTROL WORDS

CALL A — SWITCH TEST, FOR BOOT STRAP
CALL B — PARITY ERROR COUNTER
CALL 10 — FILE NO. CALLED FOR

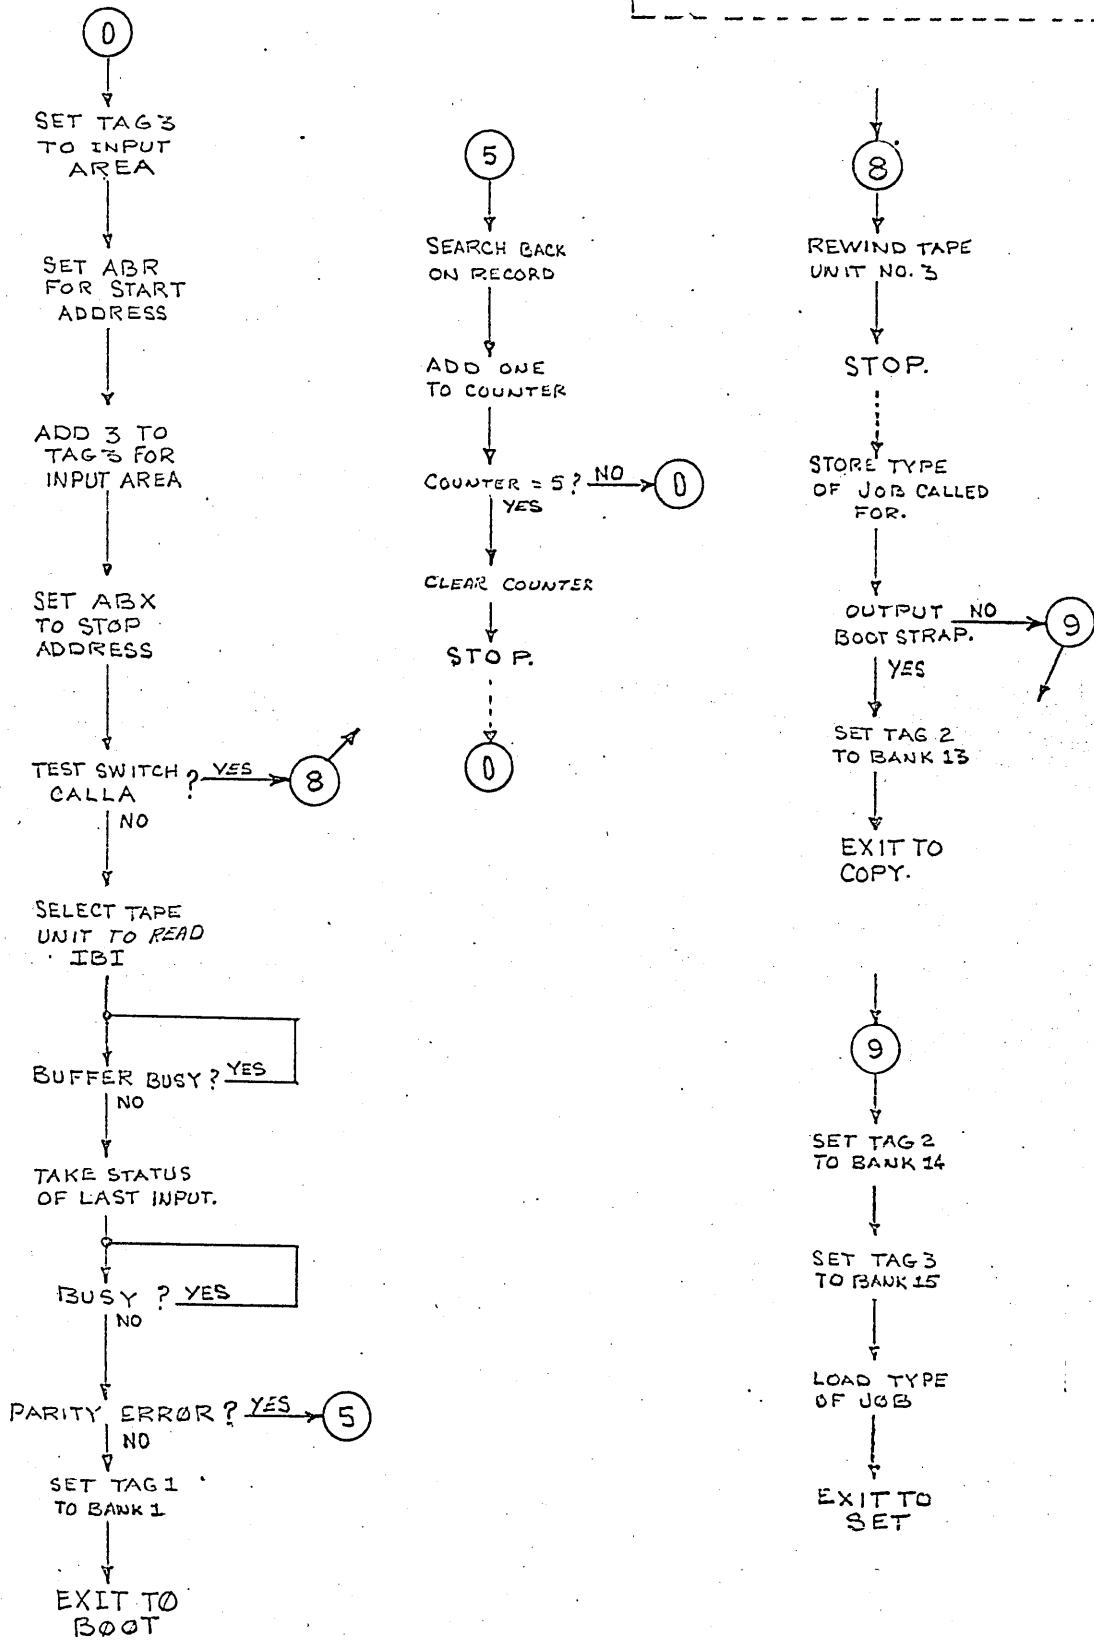

M. Nicholas

*** PROGRAM NAME ***

*
* CALL
*
* BRINGS IN BOOTBH
* AND BOOTCH OFF OF
* TAPE
* TO COMPLETE THE
* LOADING OF THE
* BOOT STRAP

6611	0020	CALL	LDN		
6612	0000			0	
6613	0302		ATT	T3	
6614	0204	CALLI	ABR	T2	**SET START ADDRESS FOR INPUT
6615	6614			CALLI	
6616	0030		ADN		
6617	0003			3	
6620	0302		ATT	T3	
6621	0020		LDN		
6622	0002			2	
6623	0205	CALL2	ABX	T2	**SET STOP ADDRESS FOR INPUT
6624	6623			CALL2	
6625	0221		LDM	T2	
6626	6744			CALLA	
6627	0001		SHA		
6630	0241		STM	T2	
6631	6744			CALLA	
6632	0263		NJP	T2	
6633	6712			CALL8	
6634	0075		EXF		
6635	0013			TAPE3	
6636	0024			READ	
6637	0270	CALL2A	IBI	T2	** READ NEXT RECORD FROM BOOT STRAP
6640	6637			CALL2A	
6641	0020		LDN		
6642	0000			0	
6643	0204	CALL3	ABR	T2	**WAIT TILL BUFFER IS COMPLETED
6644	6643			CALL3	
6645	0075	CALL4	EXF		**STATUS OF LAST INPUT
6646	0013			TAPE3	
6647	0000			RSO	
6650	0076		INA		
6651	0263		NJP	T2	
6652	6645			CALL4	
6653	0010		LPN		

6654	0004		4
6655	0261	NZP	T2
6656	6664		CALL5
6657	0241	STM	T2
6660	6745		CALLB
6661	0102	ATT	T1
6662	0164	UJP	T1
6663	0000		0
6664	0075	CALL5	EXF ** BACK SPACE ON RECORD
6665	0013		TAPE3
6666	0031		SBR
6667	0255	RAO	T2
6670	6745		CALLB
6671	0034	SBN	
6672	0005		5
6673	0260	ZJP	T2
6674	6705		CALL7
6675	0075	CALL6	EXF ** STATUS OF TAPE UNITS3
6676	0013		TAPE3
6677	0000		RS0
6700	0076	INA	
6701	0263	NJP	T2
6702	6675		CALL6
6703	0264	UJP	T2
6704	6611		CALL
6705	0241	CALL7	STM ** CLEAR PARITY COUNTER
6706	6745		CALLB
6707	0077	HLT	
6710	0264	UJP	T2
6711	6675		CALL6
6712	0075	CALL8	EXF ** REWIND TAPE3 TO LOAD POINT
6713	0013		TAPE3
6714	0034		RWL
6715	0003	TTA	
6716	0077	HLT	
6717	0241	STM	T2
6720	6741		CALL10
6721	0034	SBN	
6722	0360		360
6723	0261	NZP	T2
6724	6732		CALL9
6725	0020	LDN	
6726	0015		15
6727	0202	ATT	T2
6730	0264	UJP	T2
6731	6400		COPY
6732	0020	CALL9	LDN ** SET BANKS IN TAG2 AND TAG3
6733	0016		16

6734	0202	ATT	T2
6735	0030	ADN	
6736	0001	I	
6737	0302	ATT	T3
6740	0020	LDN	
6741	0000	CALLIO	** PRESTORE, LOADING OR DUMPING FILE
6742	0264	UJP	T2
6743	7001	SET	
6744	0022	CALLA	** SWITCH TEST, FOR BOOTSTRAP.
6745	0000	CALLB	** PARITY ERROR COUNTER.

SET

I. Function

A. General

Executive program for the reading or the writing of the Automatic Load and Dump Tape for the 8092B core.

B. Detail

SET determines the job assignment by analyzing a "job Parameter" manually entered into A-register prior to execution. This "job parameter" is structured into two four bit indicators. The high order four bits are "bank" indicators, the low order four bits are "file" indicators.

The job assignment and job parameters can be derived from this "job parameters" as follows:

JOB ASSIGNMENT AND PARAMETERS		
BANK	FILE	
0	YY	- Load file YY from Automatic Load and Dump Tape.
XX	00	- Dump 8092B core bank zero to bank XX and place on Automatic Load and Dump Tape as last file.
XX	YY	- Dump 8092B Core bank zero to bank XX and place on Automatic Load and Dump Tape as file YY.

NOTE: XX must be less than 17.

If the job assignment is dumping SET will: a) determine if the file to be dumped updates an existing file and set up the number of the file to be update b) determine if the file to be dumped is a new file to be added to the tape. It sets the control words for the last bank to be outputted and if the end of file mark and code mark octal 77, is to be put on the Automatic Load and Dump Tape to indicate the last file.

If the job assignment is loading, SET will determine the number of the file on magnetic tape to be loaded. It will clear the control word for the end of file and code mark.

SET initializes all control words, fixes program MTLD to either read or write and, exits to programs LPFT or DPTT depending on the job assignment.

II. TAGS

- TAG1 Not used.
- TAG2 Programs execution tag. Exit tag to program MTLD.
- TAG3 Used for the inputting for a record, exit tag to program DPTT.

III. Control Words

- AREA First word address of the input/output area.
- NUMBER Number of the file record to be dumped.
- FILE) The file number for dumping or loading the 8092B Core.
- LAST Last bank + 1 for dumping the 8092B Core.
- NOEOF To determine if E.O.F. and Core mark is to be output.
- BANK Crossing of the banks while loading or dumping the 8092B Core.
- CKSUM The adding of the eight-bit words while loading or dumping the 8092B Core.
- FLAG Indicates the last record of the file, for dumping the 8092B Core.

IV. Entry Points

SET

V. Exits


MTLD

DPTT

PROGRAM NAME


SET

SET TO A START CONDITION

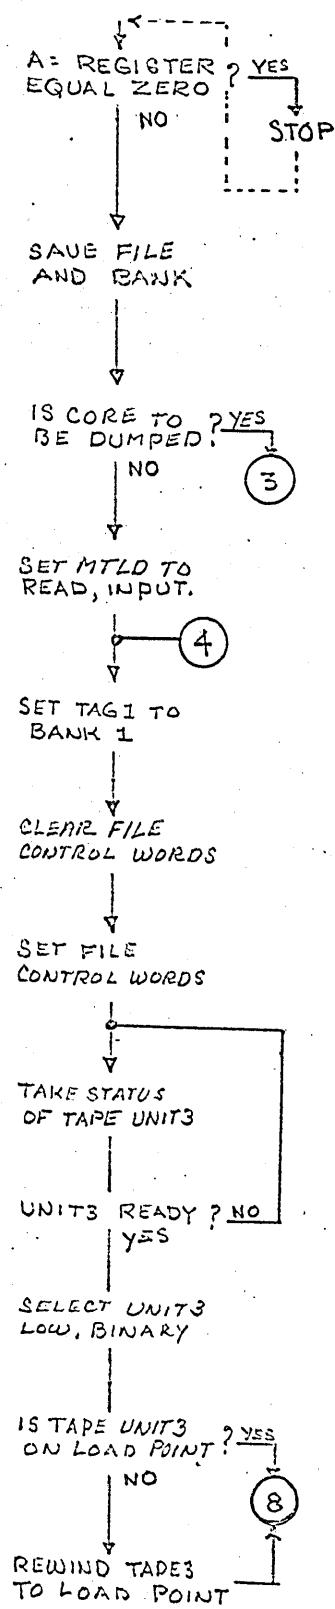

PROGRAM CONTROL WORDS

AREA NUMBER	FIRST WORD ADDRESS
FILE LAST	NUMBER OF FILE RECORDED
FILE	FILE NUMBER CALL FOR.
LAST	LAST BANK +1 FOR DUMP
HEOF	FLAG TO WRITE E.O.F.
BANK	CROSSING OF BANKS
CKSUM	CHECK SUM OF PROGRAM
FLAG	FLAG FOR LAST RECORD FOR DUMP

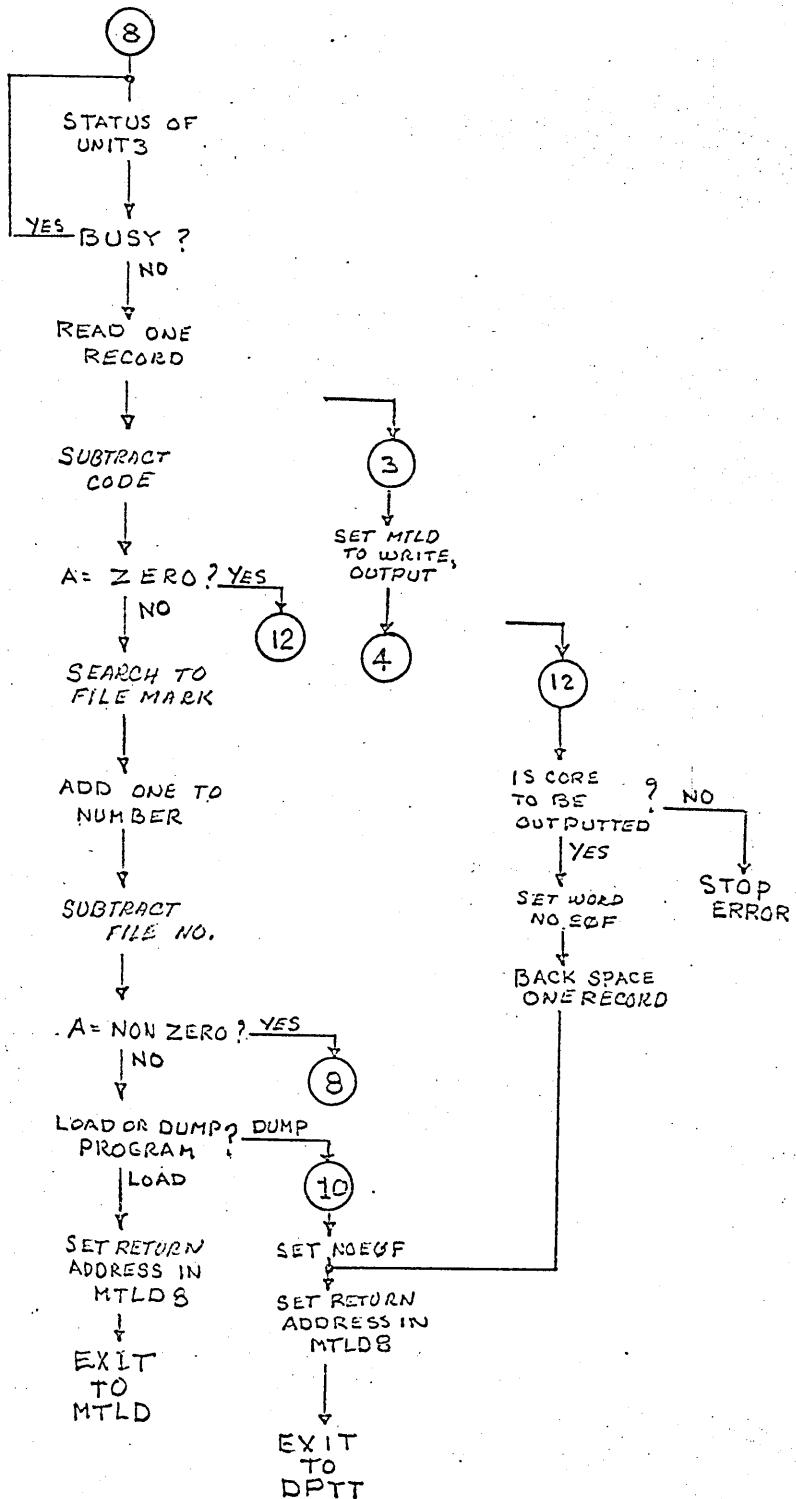

7000

PRG

7000

7000 0000
7001 0261 SET
7002 7006
7003 0077

0
T2
SETI
HLT

** STOP A-REGISTER EQUALS
ZERO, NO JOB SPECIFIED.
IF YOU WISH TO CONTINUE
SPECIFIED JOB IN A-REGISTER
AND RUN.

7004	0264
7005	7001
7006	0241
7007	7015
7010	0010
7011	0017
7012	0241
7013	7213
7014	0020
7015	0000
7016	0010
7017	0360
7020	0001
7021	0001
7022	0001
7023	0001
7024	0341
7025	7664
7026	0261
7027	7042
7030	0020
7031	0024
7032	0241
7033	7232
7034	0020
7035	0372
7036	0241
7037	7233
7040	0264
7041	7052

UJP	T2
STM	SET
STM	T2
STM	SET2
LPN	
STM	I7
STM	T2
LDN	FILE
LPN	
SHA	360
SHA	
SHA	
SHA	
STM	T3
NZP	LAST
NZP	T2
NZP	SET3
LDN	READ
STM	T2
STM	MTLD
LDN	
STM	INNT
STM	T2
STM	MTLD
UJP	T2
UJP	SET4

** STORE LAST BANK

* AUTOMATIC LOADER 8092 4-29-65 PAGE 008



7042	0020	SET3	LDN	** SET TAPE DRIVE TO WRITE
7043	0020		WRT	
7044	0241		STM	T2
7045	7232			MTLD2
7046	0020		LDN	
7047	0373			OUTT3
7050	0241		STM	T2
7051	7233			MTLD3
7052	0003	SET4	TTA	** CLEAR AND SET DATA FILE WORDS
7053	0102		ATT	T1
7054	0341		STM	T3
7055	7660			BANK
7056	0341		STM	T3
7057	7566			LPFT3
7060	0341		STM	T3
7061	7661			CKSUM
7062	0341		STM	T3
7063	7665			FLAG
7064	0241		STM	T2
7065	7214			NUMBER
7066	0241		STM	T2
7067	7215			NOEOF
7070	0075	SET5	EXF	** STATUS OF TAPE NO. 3
7071	0013			TAPE3
7072	0000			RS0
7073	0076		INA	
7074	0241		STM	T2
7075	7111			SET7
7076	0010		LPN	
7077	0002			2
7100	0260		ZJP	T2
7101	7105			SET6
7102	0077		HLT	** STOP A-REGISTER EQUALS TWO, TAPE UNIT NOT READ. CORRECT CONDICTION AND RUN
7103	0264		UJP	T2
7104	7070			SET5
7105	0075	SET6	EXF	** SELECT TAPE BINARY LOW DENSITY
7106	0013			TAPE3
7107	0011			SOL
7110	0020		LDN	
7111	0000	SET7		** STORED STATUS OF TAPE NO. 3
7112	0010		LPN	
7113	0040			40
7114	0261		NZP	T2
7115	7121			SET8
7116	0075		EXF	
7117	0013			TAPE3

7120	0034		RWL	
7121	0075	SET8	EXF	** STATUS OF TAPE NO. 3
7122	0013			TAPE3
7123	0000			RSO
7124	0076		INA	
7125	0263		NJP	T2
7126	7121			SET8
7127	0075		EXF	
7130	0013			TAPE3
7131	0024			READ
7132	0372		INN	T3
7133	7670			AREA
7134	7770		+100	AREA
7135	0321	SET9	LDM	T3 TEST FOR LAST FILE
7136	7670			AREA
7137	0034		SBN	
7140	0077			77
7141	0260		ZJP	T2
7142	7177			SET12
7143	0075		EXF	
7144	0013			TAPE3
7145	0032			SFF
7146	0255		RAO	T2
7147	7214			NUMBER
7150	0235		SBM	T2
7151	7213			FILE
7152	0261		NZP	T2
7153	7121			SET8
7154	0321		LDM	T3
7155	7664			LAST
7156	0261		NZP	T2
7157	7166			SET10
7160	0020		LDN	
7161	7541			LPFT
7162	0241		STM	T2
7163	7306			MTLD8
7164	0264		UJP	T2
7165	7222			MTLD1
7166	0003	SET10	TTA	** CLEAR FLAG NO. EOF
7167	0241		STM	T2
7170	7215			NOEOF
7171	0020	SET11	LDN	** STORE ADDRESS FOR JUMP
7172	7410		DPTT3	
7173	0241		STM	T2
7174	7306			MTLD8
7175	0264		UJP	T2
7176	7362			DPTT
7177	0321	SET12	LDM	T3 ** LOADING OR DUMPING PROGRAM

7200	7664		LAST	
7201	0261	NZP	T2	
7202	7204		SET13	
7203	0077	HLT		** STOP A-REGISTER EQUALS ZERO, FILE CALLED FOR NOT ON TAPE - NO RECOVERY RESTART.
7204	0241	SET13	STM	T2
7205	7215			NOEOF
7206	0075	SET14	EXF	
7207	0013			TAPE3
7210	0031			SBR
7211	0264		UJP	T2
7212	7171			SET11
7213	0000	FILE		
7214	0000	NUMBER		** FILE NUMBER LOAD OR DUMP
7215	0000	NOEOF		** PROGRAM FILE COUNTER ** ZERO NO EOF AFTER DUMP.

FORMAT OF INPUT AND OUTPUT
FOR PROGRAM
MTLD.

MAGNETIC TAPE.

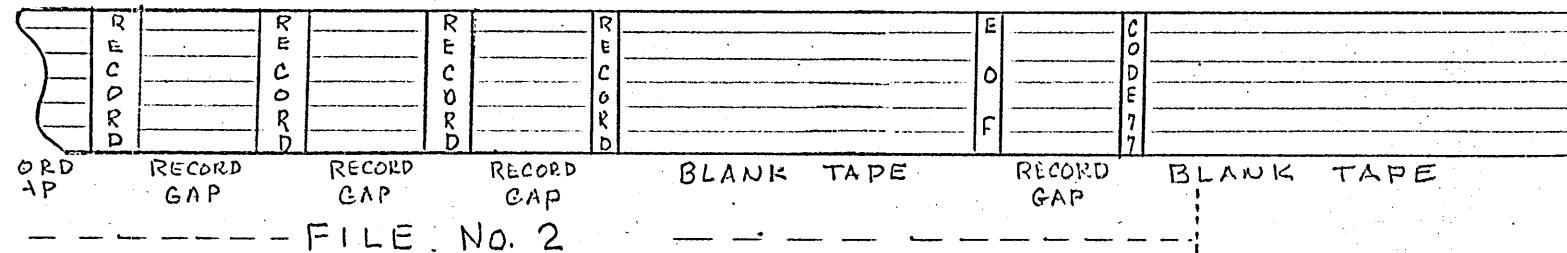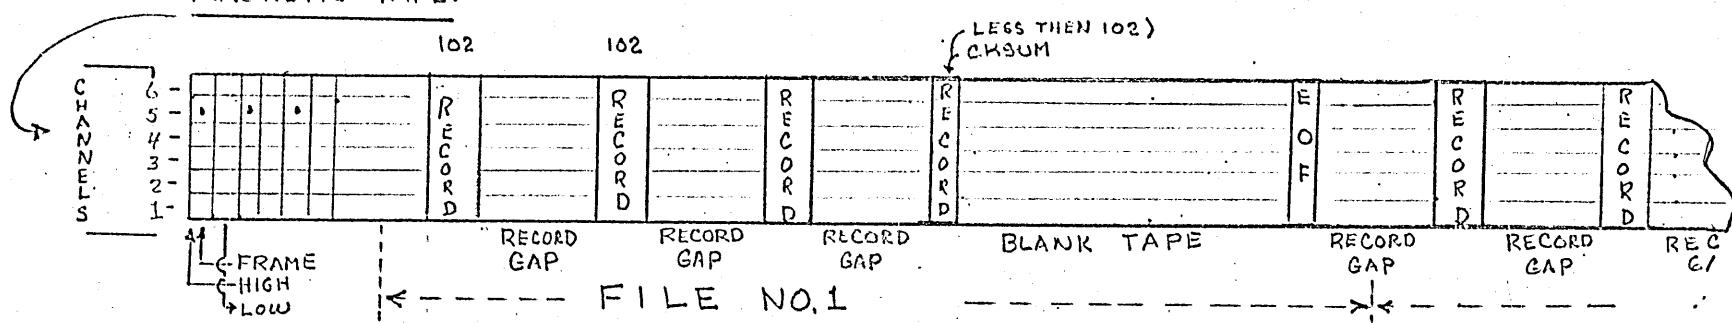

CHANNELS 1, 2, 3, AND 4 ARE PART OF AN 8-BIT WORD. CHANNEL 5, IS TO IDENTIFY HIGH ORDER OF THAT WORD.

THERE ARE 102 FRAMES PER RECORD. EXCEPT THE LAST RECORD OF THE FILE, ITS LESS THAN 102 FRAMES, THE CHECKSUM IS STORED IN THE LAST TWO FRAMES OF THAT RECORD. THEN BLANK TAPE BEFORE END OF FILE MARK.

FILE TWO, IS THE LAST FILE ON THIS TAPE. IT IS FOLLOWED BY BLANK TAPE, END OF FILE MARK AND CODE MARK (77) CODE MARK, ALLOWS PROGRAM ("SET") TO IDENTIFY THE LAST FILE ON TAPE

Nicholas

MTLD

I. Function

A. General

Reads or writes in binary and low density on the normal channel, variable length records up to 102 characters. Each character consists of four bits stored in the low order position of the frame.

Checks for parity errors after each record, if the parity occurs five times for the same record, the program will halt and indicate that there was a parity error on the tape.

B. Detail

The routine writes a program or file from 8092B core to the Automatic Load and Dump Tape. The program or file is recorded on the tape as a file of 102 character records (note the last record can be less than 102 characters) the routine leaves about twelve inches of blank tape between files (that is between programs written on the tape). Each file is divided by an end of file mark, except the last file on the tape, it has an end of file mark and a code mark (octal 77). Code mark identifies the last file on the Automatic Load and Dump Tape. After dumping a program or file on the tape, MTLD will come to a halt and display its file number in the A register.

The routine reads a file or program from the Automatic Load and Dump Tape. After each record is read it checks for end of file mark, if file mark is present, the check sum which was built in the program LDFT is compared with the checksum on the tape and displayed in the A-register. If the A-register equals zero, the file was loaded correctly, if other than zero, the file was loaded incorrectly.

II. TAGS

- TAG1 Not used.
- TAG2 Programs execution tag.
- TAG3 Used with the input/output of the records. Exit tag to the programs LPFT and DPTT3.

III. CONTROL WORDS

- STOP Input or output last word address.
- AREA Input or output first word address.
- SIZE Number of characters just inputted.
- FLAG Last record to be dumped for this file.
- NOEOF Control to write file mark and code mark.
- CKSOM Checksum of the file just inputted to the 8092B core.

IV. ENTRY POINT

- MTLD Entry point for the programs SET and DPTT.

MTLD1 Entry point for the program LPFT.

V. EXITS

To LPFT



To DPTT3

PROGRAM NAME

MTLD

MAGNETIC TAPE LOAD and DUMP

ENTERING FROM SET, LPFT and DPTT

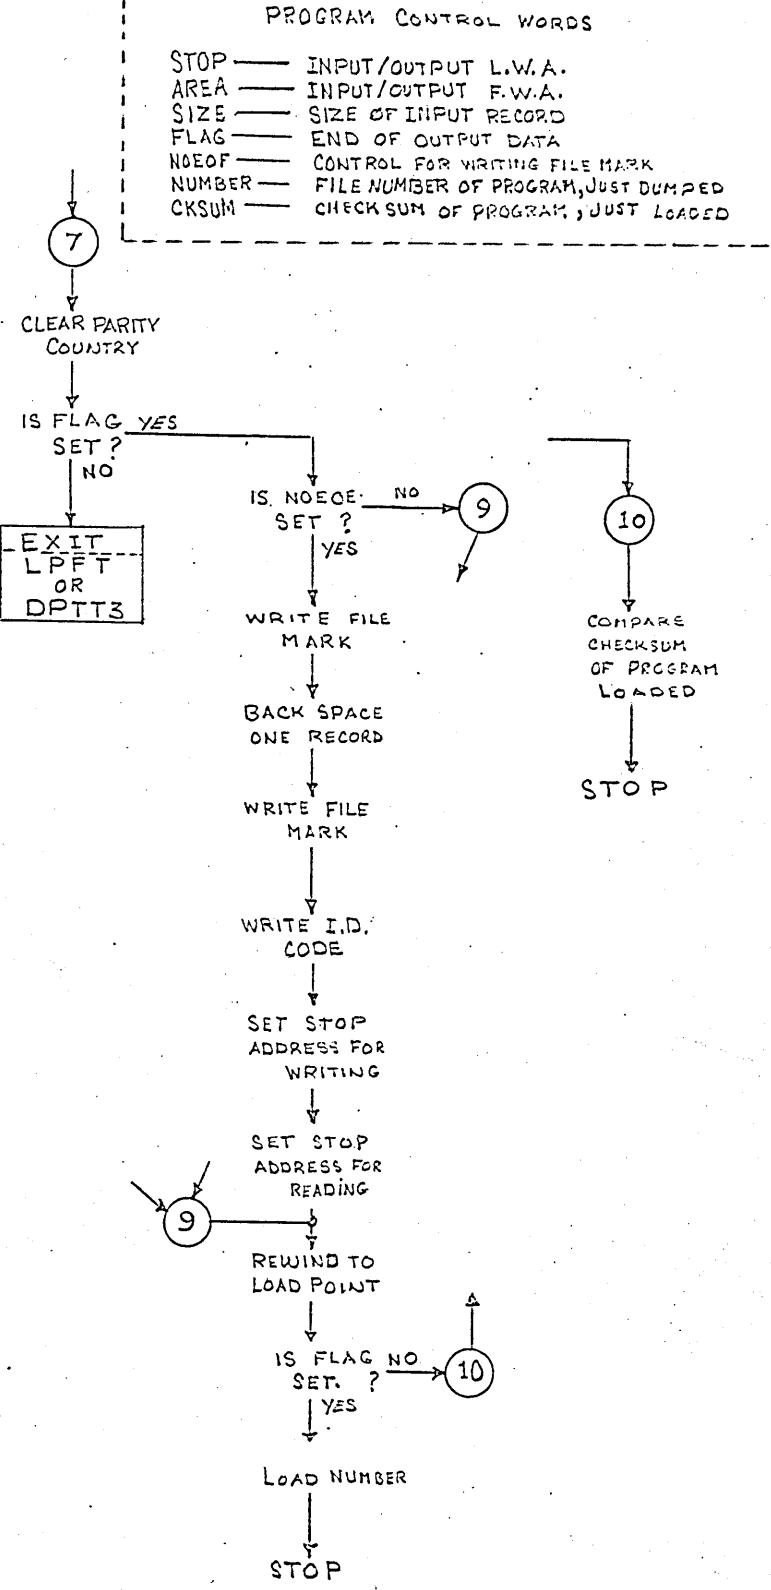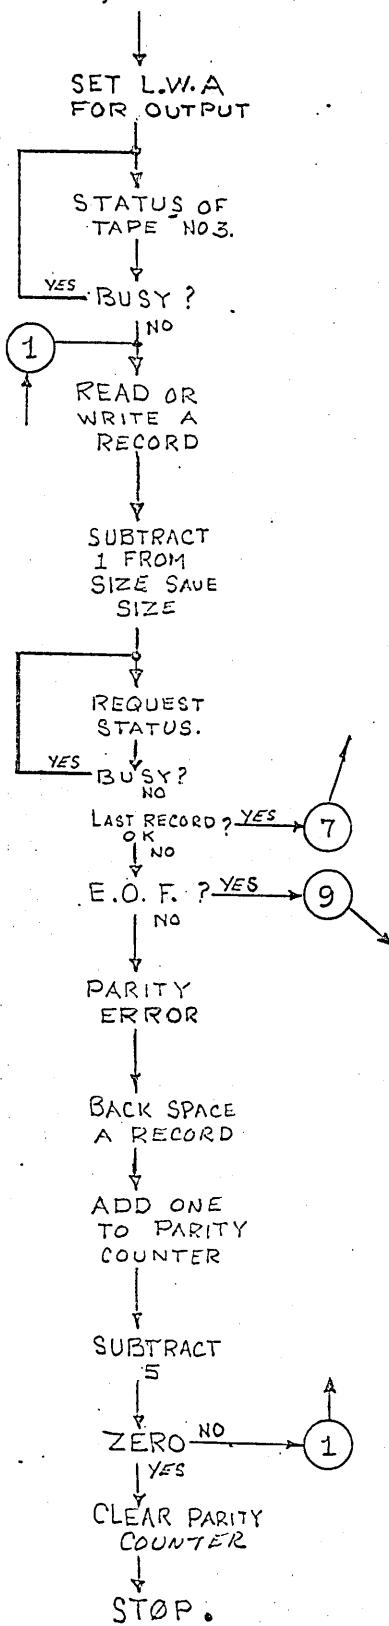

N. NICHOLAS

 * PROGRAM NAME MTLD
 *
 * MAGNETIC TAPE LOAD AND DUMP
 * READS DATA OR WRITES DATA
 * TO 601 OR 603 USING 8093
 * SYNCHRONIZER


7216	0321	MTLD	LDM	T3
7217	7666			STOP
7220	0241		STM	T2
7221	7235			MTLD4
7222	0075	MTLDI	EXF	** STATUS OF TAPE UNIT
7223	0013			TAPE3
7224	0000			RSO
7225	0076		INA	
7226	0263		NJP	T2
7227	7222			MTLDI
7230	0075		EXF	
7231	0013			TAPE3
7232	0000	MTLD2		** STORED CODE, WRITE OR READ
7233	0000	MTLD3		** STORED CODE, OUTPUT OR INPUT
7234	7670			AREA
7235	7776	MTLD4	+106	AREA
7236	0034		SBN	
7237	0001			I
7240	0341		STM	T3
7241	7662			SIZE
7242	0075	MTLD5	EXF	**CHECK FOR E.O.F. AND PARITY
7243	0013			TAPE3
7244	0000			RSO
7245	0076		INA	
7246	0263		NJP	T2
7247	7242			MTLD5
7250	0010		LPN	
7251	0024			24
7252	0260		ZJP	T2
7253	7301			MTLD7
7254	0034		SBN	
7255	0024			24
7256	0260		ZJP	T2
7257	7331			MTLD9
7260	0075		EXF	
7261	0013			TAPE3
7262	0031			SBR
7263	0255		RAO	T2

7264	7300		MTLD6	
7265	0034		SBN	
7266	0005			5
7267	0261		NZP	T2
7270	7222			MTLD1
7271	0241		STM	T2
7272	7300			MTLD6
7273	0020		LDN	
7274	0022			22
7275	0077		HLT	** STOP A = 22, PARITY ERROR IF YOU WISH TO TRY AGAIN, JUST CONTINUE FROM HERE
7276	0264		UJP	T2
7277	7222			MTLD1
7300	0000	MTLD6	STM	** COUNTER FOR PARITY RETRIES ** TEST WRITING OR READING
7301	0241	MTLD7		
7302	7300		LDM	T2
7303	0321			MTLD6
7304	7665		ZJP	T3
7305	0360			FLAG
7306	0000	MTLD8	ZJP	T3
7307	0221			** STORED ADDRESS FROM SET
7310	7215		LDM	T2
7311	0260			NOEOF
7312	7331		ZJP	T2
7313	0075			MTLD9
7314	0013		EXF	
7315	0021			TAPE3
7316	0075		EXF	WFM
7317	0013			TAPE3
7320	0031		EXF	SBR
7321	0075			TAPE3
7322	0013		EXF	WFM
7323	0021			TAPE3
7324	0075		EXF	WRT
7325	0013			OTN
7326	0020		77	
7327	0074			** RESET F. W. A. AND L. W. A.
7330	0077		LDN	
7331	0020	MTLD9	+102	AREA
7332	7772		STM	T3
7333	0341			STOP
7334	7666		ADN	
7335	0030			4
7336	0004		STM	T2
7337	0241			MTLD4
7340	7235		EXF	
7341	0075			


7342	0013			TAPE3	
7343	0034			RWL	
7344	0321	LDM		T3	
7345	7665			FLAG	
7346	0260	ZJP		T2	
7347	7353			MTLDIO	
7350	0221	LDM	T2	** LOAD PROGRAM FILE NUMBER	
7351	7214		NUMBER		
7352	0077	HLT		** STOP NEW PROGRAM ON TAPE A-REGISTER CONTAINS FILE NUMBER	
7353	0321	MTLDIO	LDM	T3	** CKSUM COMPARE, IF LOADED PROPERLY
7354	7661			CKSUM	
7355	0135	SBM		T1	
7356	0000			0	
7357	0135	SBM		T1	
7360	0000			0	
7361	0077	HLT			** STOP PROGRAM LOADED CKSUM IN A-REGISTER ZERO = LOADED O. K. NON-ZERO = LOADED BAD
7362	0321	DPTT	LDM	T3	
7363	7664			LAST	
7364	0034		SBN		
7365	0017			17	
7366	0363	NJP		T3	
7367	7400			DPTT2	
7370	0020	LDN			
7371	0377			377	
7372	0077	HLT			** STOP. A-REGISTER EQUALS 377, PROGRAM FOR DUMPING IS TO LARGE. NO RECOVERY.
7400		PRG	7400		***** ***** * PROGRAM NAME DPTT * * * BREAK UP 8BIT WORDS TO 4BIT * * WORDS, STORE IN OUTPUT AREA * * FOR DUMP * ***** *****
7400	0020	DPTT2	LDN		** SET START ADDRESSES
7401	0000			0	
7402	0341	STM		T3	
7403	7411			DPTT4	
7404	0020	LDN			
7405	0270			270	

PROGRAM DPTT. FORMAT


BANK 0

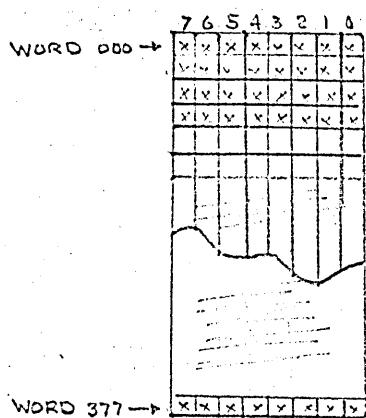


BANK 1

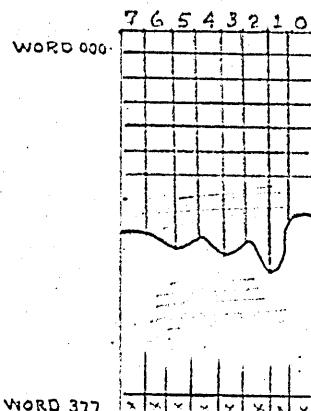

BANK 2

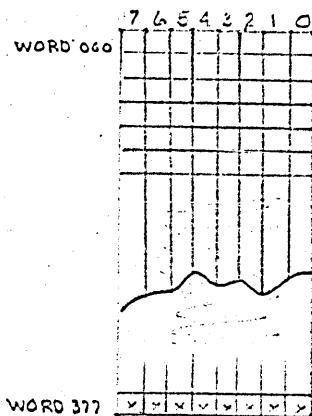

BANK 15

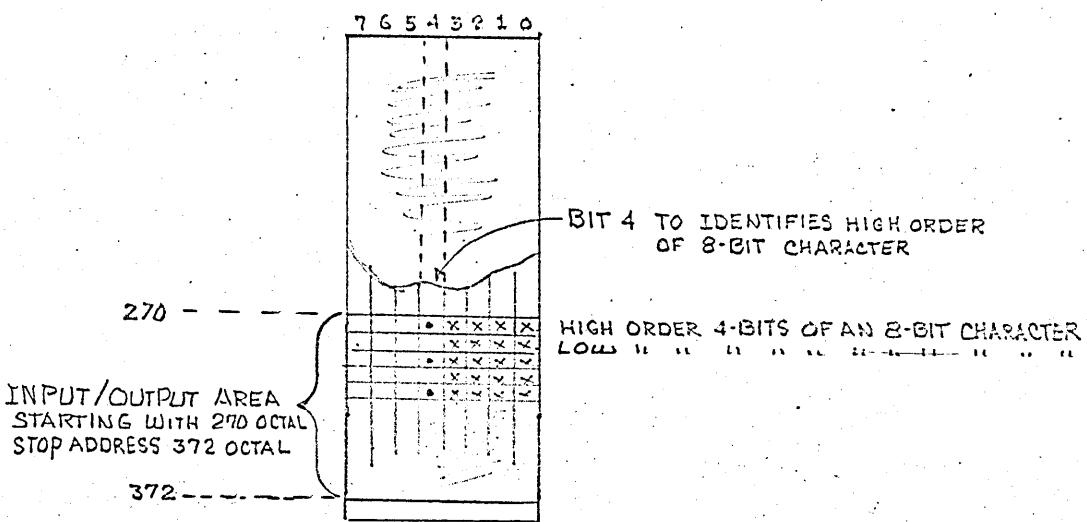

STARTING WITH THE WORD 000 OF BANK 0. TAKES THE 8-BITS DIVIDES THEM INTO TWO FOUR-BIT WORDS, ADDS BIT 4 TO IDENTIFIES HIGH ORDER 4-BITS OF AN 8-BIT WORD. STORE THEM INTO BANK 15 STARTING WITH ADDRESS 270 OCTAL.

n nicholas

DPTT

I. Function

A. General

Takes an eight-bit word, checksums the eight bits then divides them into two four-bit words. The four bit words are stored into the INPUT/OUTPUT AREA so the program MTLD can output them onto the Automatic Load and Dump Tape.

B. Detail

The last word address for dumping the 8092B core, is address 377 of the last bank which was indicated for dumping. Starting address of the eight-bit words will always be word zero of bank zero. The eight bit words are checksummed, then divided into two four-bit words and identifies, the high order four bits of the eight-bit word by adding bit 4. Stores the high order word first, starting with the address of 270 octal of bank 15. The storage address is then incremented by one and the low order four-bits of the eight-bit word is stored. Both the store and start addresses are then incremented by one; then the processing of the eight-bit word will start again.

When the INPUT/OUTPUT AREA, (which is bank 15 starting with the word 270 octal as the first word address and 372 octal as the last word address) becomes filled, it releases control to program MTLD.

After the last eight bit word becomes processed the checksum word is then processed in the same manner, and sets a flag to indicate that this will be the last record for this file, then exits, to program MTLD.

Continuation

II. TAGS

- TAG1 Used in the loading of the eight-bit words.
- TAG2 Exit tag to the program MTLD.
- TAG3 Used for storing the four-bit words into the INPUT/OUTPUT AREA, Program execution tag.

III. CONTROL WORDS

- LAST The last bank + one for dumping eight-bit words.
- 99 CKSUM Checksum of the eight bit words just dumped.
- BANK To indicate the crossing of a bank.
- STOP Last word address + one of the output area.
- AREA First word address of the output area.
- FLAG The last record to be dumped on this file.

IV. ENTRY POINTS

- DPTT Entry point for the program SET.
- DPTT3 Entry point for the program MTLD.

V. EXITS TO



MTLD

PROGRAM NAME

DPTT

DUMP PROGRAM TO TAPE

ENTERING FROM SET and MTLD

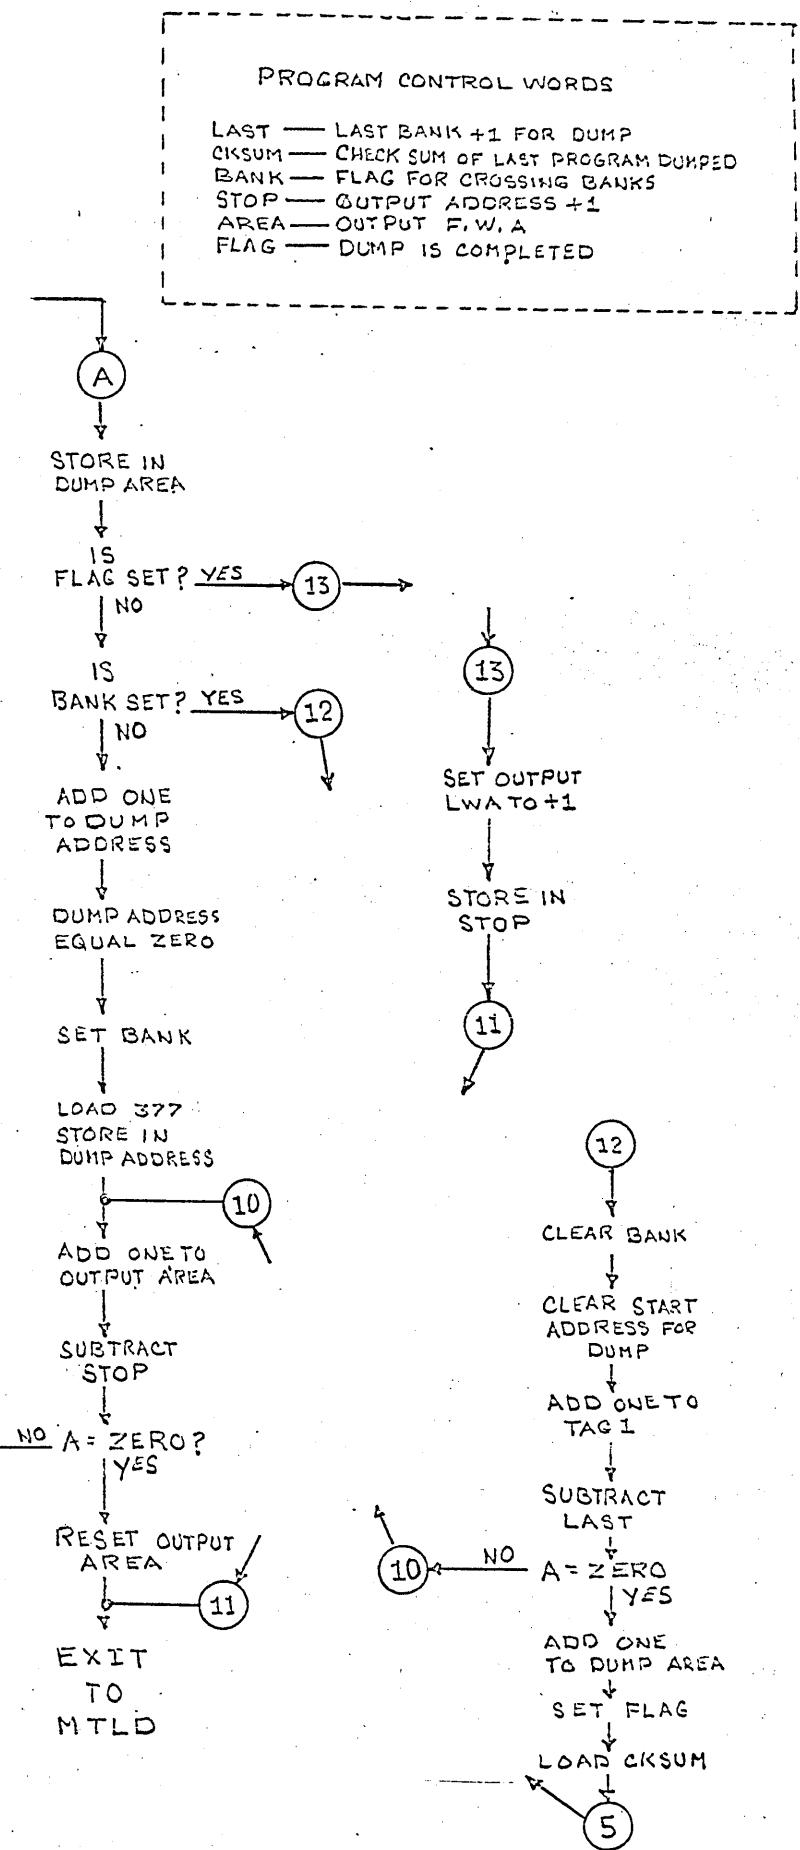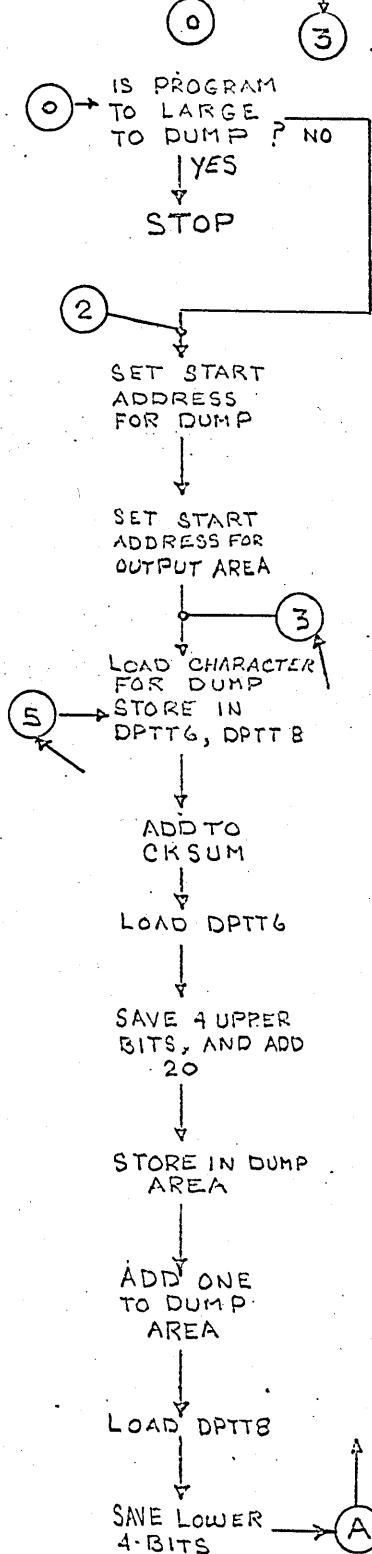


7406	0341		STM	T3	
7407	7433			DPTT7	
7410	0121	DPTT3	LDM	T1	** LOAD CHARACTER FOR DUMP
7411	0000	DPTT4		0	** DATA START ADDRESS FOR DUMP
7412	0341	DPTT5	STM	T3	** STORE DATA FORWARD
7413	7421			DPTT6	
7414	0341		STM	T3	
7415	7441			DPTT8	
7416	0351		RAM	T3	
7417	7661			CKSUM	
7420	0020		LDN		
7421	0000	DPTT6			** PROCESS HIGH ORDER OF WORD
7422	0010		LPN		
7423	0360			360	
7424	0001		SHA		
7425	0001		SHA		
7426	0001		SHA		
7427	0001		SHA		
7430	0030		ADN		
7431	0020			20	
7432	0341		STM	T3	
7433	0270	DPTT7		270	** START ADDRESS FOR DUMP
7434	0355		RAO	T3	
7435	7433			DPTT7	
7436	0341		STM	T3	
7437	7445			DPTT9	
7440	0020		LDN		
7441	0000	DPTT8			** PROCESS LOW ORDER OF WORD
7442	0010		LPN		
7443	0017			17	
7444	0341		STM	T3	
7445	0000	DPTT9		0	** STORE DATA IN OUTPUT AREA
7446	0321		LDM	T3	
7447	7665			FLAG	
7450	0361		NZP	T3	
7451	7531			DPTT13	
7452	0321		LDM	T3	
7453	7660			BANK	
7454	0361		NZP	T3	
7455	7504			DPTT12	
7456	0355		RAO	T3	
7457	7411			DPTT4	
7460	0361		NZP	T3	
7461	7470			DPTT10	
7462	0355		RAO	T3	
7463	7660			BANK	
7464	0020		LDN		
7465	0377			377	

7466	0341		STM	T3
7467	7411			DPTT4
7470	0355	DPTT10	RAO	T3 ** INCREASE STORE AREA BY ONE
7471	7433			DPTT7
7472	0335		SBM	T3
7473	7666			STOP
7474	0361		NZP	T3
7475	7410			DPTT3
7476	0020		LDN	
7477	7670			AREA
7500	0341		STM	T3
7501	7433			DPTT7
7502	0264	DPTT11	UJP	T2 ** EXIT TO PROGRAM MILD
7503	7216			MTLD
7504	0003	DPTT12	TTA	
7505	0341		STM	T3 ** START OF NEXT BANK
7506	7660			BANK BANKS
7507	0341		STM	T3
7510	7411			DPTT4
7511	0103		TTA	TI
7512	0030		ADN	
7513	0001			I
7514	0102		ATT	TI
7515	0335		SBM	T3
7516	7664			LAST
7517	0361		NZP	T3
7520	7470			DPTT10
7521	0355		RAO	T3
7522	7433			DPTT7
7523	0355		RAO	T3
7524	7665			FLAG
7525	0321		LDM	T3
7526	7661			CKSUM
7527	0364		UJP	T3
7530	7412			DPTT5
7531	0020	DPTT13	LDN	
				** SET SIZE FOR OUTPUT
7532	0001			I
7533	0351		RAM	T3
7534	7433			DPTT7
7535	0341		STM	T3
7536	7666			STOP
7537	0364		UJP	T3
7540	7502			DPTT11

FORMAT FOR PROGRAM


LDFT

BANK 15

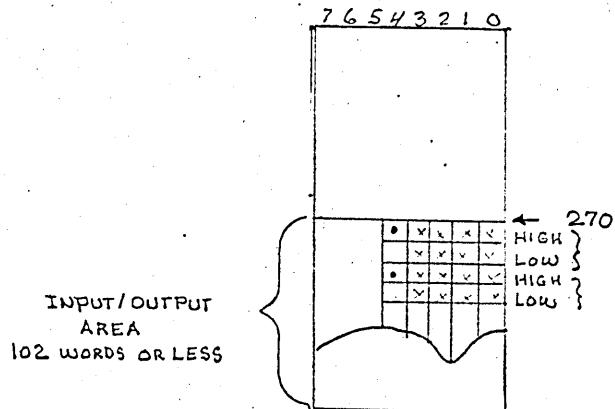


INPUT/OUTPUT AREA BITS 5, 6 AND 7 NOT USED. BIT 4 IDENTIFIES HIGH ORDER BITS.
BITS 3, 2, 1 AND 0 ARE THE BITS TO BUILD AN EIGHT BIT WORD.


BANK 0

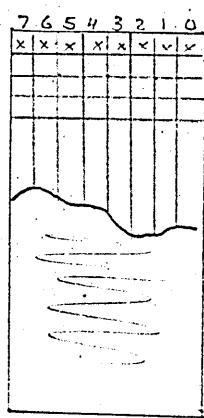

BANK 1

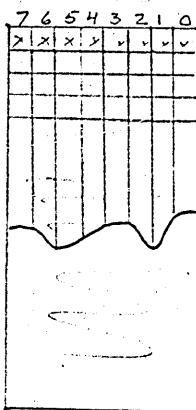

BANK 2

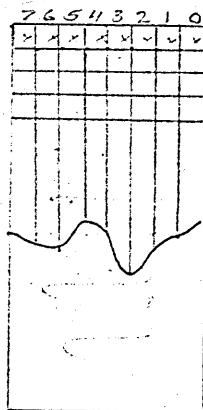

COMBINES THE GROUPS, HIGH AND THE LOW ORDERS OF BITS 3, 2, 1 AND 0 INTO AN EIGHT BIT WORD. BITS 3, 2, 1 AND 0 OF THE HIGH ORDER ARE SHIFTED TO BITS 7, 6, 5, AND 4 OF THE 8-BIT WORD, THEN BITS 3, 2, 1 AND 0 OF THE LOW ORDER ARE COMBINED WITH THE 8-BIT WORD, AND STORED INTO THE 8092B CORE STARTING WITH WORD ZERO OF BANK ZERO. IT WILL CONTINUE TO COMBINE THE HIGH AND THE LOW, TAKE THE CHECKSUM AND STORE THEM UNTIL THE FILE IS COMPLETED.

-R. nicholas

LDFT

I. Function

A. General

Takes the four-bit input words and assembles them into eight-bit words, checksums the eight-bit words stores them in bank zero starting with word zero. The storage address is incremented for the next eight-bit character. The process is repeated until the program MTLD detects the end of file from the Automatic Load and Dump Tape.

B. Detail

The input words (which are inputted by MTLD) are stored in bank 15 starting with address 270. They are four bit words with identification of the four high order bits for each eight bit word. The high order bits are combined with the corresponding low order bits, in assembling an eight-bit Teleprogrammer word. This eight-bit word is checksummed and then stored into the 8092B core starting with word zero of bank zero. The storage address is then incremented by one. The process will continue until the end of file mark is detected by the program MTLD.

II. TAGS used

TAG1 Used for storing of the eight bit words.

TAG2 Exit tag to the program MTLD1.

TAG3 Used with the input of the four bit words, LDFT execution tag.

III. CONTROL WORDS

HOLD Temporary storage to build the eight bit word.

CKSUM The adding of the bits in an eight-bit word before storing.

BANK Crossing of the banks before storing next eight-bit word.

SIZE The number of characters of the last input record.

AREA The starting address of the input record.

IV. ENTRY POINTS

LDFT Entry point for the program MTLD.

V. EXITS


To MTLD1

PROGRAM NAME

LPFT


LOAD PROGRAM FROM TAPE

ENTERING FROM MTLD

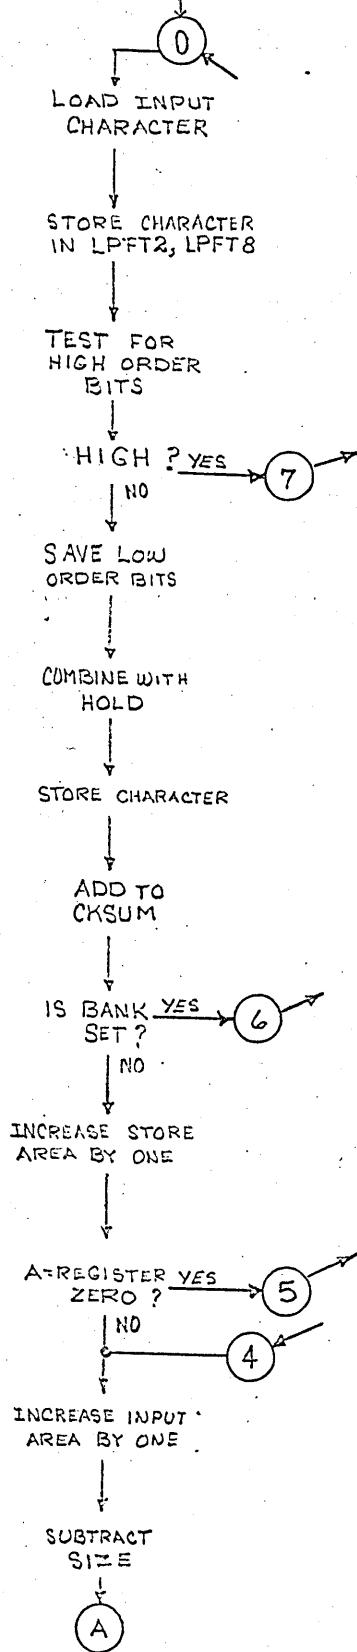

PROGRAM CONTROL WORDS.

HOLD	TEMP STORE WORD
CKSUM	CHECKSUM OF PROGRAM LOADED
BANK	FLAG FOR CROSSING BANKS
SIZE	INPUT OF CHARACTER INPUTED
SIZE1	LAST INPUT CHARACTER COUNT
AREA	INPUT F.W.A.

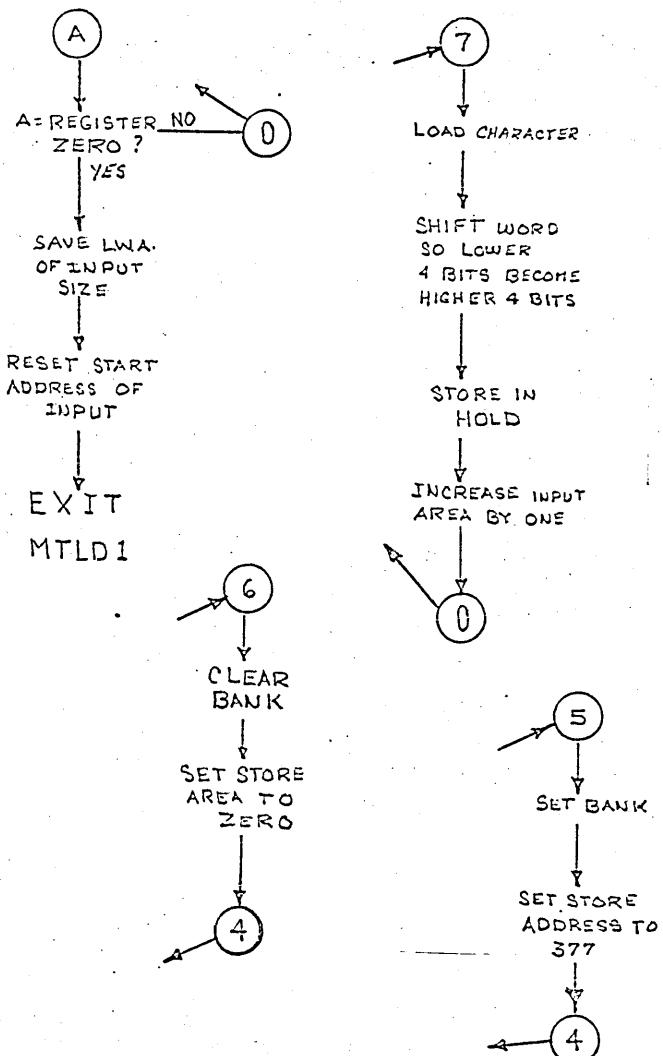

* PROGRAM NAME LPFT *

* BREAKUP TWO FOUR BIT WORDS *
 * TO MAKE UP ONE 8-BIT WORD *
 * COMING IN FROM MAGNETIC *
 * TAPE *

7541	0321	LPFT	LDM	T3	
7542	0270	LPFT1		270	** FWA OF INPUT DATA
7543	0341		STM	T3	
7544	7562			LPFT2	
7545	0341		STM	T3	
7546	7641			LPFT8	
7547	0034		SBN		
7550	0077			77	
7551	0360		ZJP	T3	
7552	7656			LPFT9	
7553	0030		ADN		
7554	0077			77	
7555	0010		LPN		
7556	0020			20	
7557	0361		NZP	T3	
7560	7640			LPFT7	
7561	0020		LDN		
7562	0000	LPFT2			** LOWER 4-BITS OF CHARACTER
7563	0315		LSM	T3	
7564	7657			HOLD	
7565	0141		STM	T1	
7566	0000	LPFT3		0	** STORE ADDRESS FOR DATA
7567	0351		RAM	T3	
7570	7661			CKSUM	
7571	0321		LDM	T3	
7572	7660			BANK	
7573	0361		NZP	T3	
7574	7625			LPFT6	
7575	0355		RAO	T3	
7576	7566			LPFT3	
7577	0360		ZJP	T3	
7600	7615			LPFT5	
7601	0355	LPFT4	RAO	T3	** INCREASE FWA BY ONE
7602	7542			LPFT1	
7603	0335		SBM	T3	
7604	7662			SIZE	
7605	0361		NZP	T3	
7606	7541			LPFT	

7607	0020		LDN	
7610	7670		STM	AREA
7611	0341		STM	T3
7612	7542			LPFT1
7613	0264		UJP	T2 ** GO READ NEXT RECORD
7614	7222			MTLD1
7615	0355	LPFT5	RAO	T3 ** SET SWITCH, CROSSING BANK
7616	7660			BANK
7617	0020		LDN	
7620	0377			377
7621	0341		STM	T3
7622	7566			LPFT3
7623	0364		UJP	T3
7624	7601			LPFT4
7625	0003	LPFT6	TTA	** SET ADDRESS FOR NEXT BANK
7626	0341		STM	FOR STORING CHARACTERS
7627	7660			BANK
7630	0341		STM	T3
7631	7566			LPFT3
7632	0103		TTA	T1
7633	0030		ADN	
7634	0001			I
7635	0102		ATT	T1
7636	0364		UJP	T3
7637	7601			LPFT4
7640	0020	LPFT7	LDN	** UPPER 4-BITS OF CHARACTER
7641	0000	LPFT8		** PRESTORED CHARACTER
7642	0010		LPN	
7643	0017			17
7644	0001		SHA	
7645	0001		SHA	
7646	0001		SHA	
7647	0001		SHA	
7650	0341		STM	T3
7651	7657			HOLD
7652	0355		RAO	T3
7653	7542			LPFT1
7654	0364		UJP	T3 ** GET NEXT CHARACTER FOR WORD
7655	7541			LPFT
7656	0077	LPFT9	HLT	** JOB FILE CALLED FOR NOT ON (ALD) TAPE

7657	0000	HOLD		** TEMP STORAGE FOR CHARACTER
7660	0000	BANK		** CROSSING OF BANK TEST
7661	0000	CKSUM		** CHECKSUM FOR CHARACTERS
7662	0000	SIZE		** SIZE OF INPUT RECORD NEW
7663	0000	SIZEI		** SIZE OF INPUT RECORD OLD
7664	0000	LAST		** LAST BANK TAG FOR DUMP
7665	0000	FLAG		** END OF OUTPUT DATA
7666	7772	STOP	+102	** INPUT -- OUTPUT = STOP ADDRESS
	7670	PRG		7670
7670	0000	AREA		** AREA STARTING I/O FWA
0373	OUTT3	EQU	373	** OUTPUT SELECT CODE TAG 3
0372	INNT3	EQU	372	** INTPUT SELECT CODE TAG 3