

IBM POUGHKEEPSIE

April 15, 1964

001

Diagnostic Engineering Publications

1410/7010

Subject: Diagnostic Program T021C - Tape Multi-Channel and
Interchangeability Test

Sequence Number 205, 206

Replaces T021B

This program is a two-phase program and uses a system and four channel control cards in Phase I.

In Phase II only a system control card is used.

Phase I

System Control Card T021 001
Channel One Control Card T021 002
Channel Two Control Card T021 003
Channel Three Control Card T021 004
Channel Four Control Card T021 005

Phase II

System Control Card T021

To provide an automatic branch to the next test after completion of one read pass, change phase two location (card no.

column from

Corrects errors in T021B

1. Allows correct operation on 10K systems
2. Corrects rewind section
3. Saves TADS from Phase I, to allow similar operation in Phase II

Enclosures 88 Pages

Card Deck for CARD ONLY SYSTEMS (as punched by UP51)

9 Cards - Card Loader (1-7) and 2 Core Clear

32 Cards No. 001 - 32 Data Cards

2 Card Execute Card

Distribution: 1410

7010

Other 1410/7010 installations with 729 or 7330 tape drives.

002
TC21

003
T021
Page 001

T021C

**TAPE MULTI-CHANNEL AND
INTERCHANGEABILITY TEST**

4/15/64

004
T021
Page 002

CONTENTS OF T021

4.xx.00.0	Test Description	Page 003
4.xx.01.0	Loading Procedures	Page 006
4.xx.02.0	Operating Procedures	Page 007
4.xx.03.0	Operating Hints, Comments	Page 008
4.xx.04.0	Program Halts and Restarts	Page 010
4.xx.05.0	Typeouts	Page 010
4.xx.06.0	Flow Charts	Page 013
4.xx.07.0	Appendix A	Page 014 a
4.xx.08.0	Listing	Page 001
	Summary	Page 069

*Note
Customer
WRITES IN
EVEN PARITY*

005
T021
Page 003

4.xx.00.0

TEST DESCRIPTION

.00.1

MODIFICATIONS

This program replaces and obsoletes the prior version, and corrects errors in the rewind section, allows the program to run correctly on a 10K system, and saves TADS from Phase I for use by Phase II.

.00.2

DESCRIPTION

T020 should be run preceding T021. TAU and CPU should be operating correctly before running this test.

PURPOSE

As an interchangeability test; the purpose is to check the accuracy of data written on one tape drive, read on the same tape drive and all other tape drives in the system.

Multi-channel operation can be checked exclusively by repeating the write or read pass and not interchanging tapes between passes.

Overlap writing and reading is checked following each write and read tape instruction. The balance of overlap tape operation are covered in T020.

METHOD OF TEST

Any configuration of tape drives, (except drive 0) on any or all channels, can be tested.

To start the test all drives are given a rewind instruction.

The numbers of the ready drives are stored in a ready table. Variable length, fixed pattern records are then written on all ready drives. Record lengths (number of characters) are:

5	55	185	395	685
10	80	220	455	765
20	110	280	530	845
35	145	335	605	955

100 each

100 of each record for a total of 2000 records are written.

If the overlap feature is available and TAD 4 normal, a check is made following each successful write to see if the program branched on the BOL instruction when it should have or didn't branch if not using overlap (TAD4A1). The write pass can be repeated if TAD3 is a 1.

During the read pass each record is checked for any I/O status errors and if none, compared to the record as it should have been written. Overlap (if available) is checked following each read to see if the program branched on the BOL instruction. Following each read pass a message notifies the operator to INTER-CHANGE TAPE. If checking for interchangeability, the tapes should be interchanged systematically as often as desired. If checking mult-channel and overlap operation only, press START. Make TAD3 a 1 to repeat the read pass automatically.

Load Mode operation is checked if TAD6 is a 1. Five consecutive word marks are placed over the last five characters of the pattern before writing any records. During the read pass each of the 2000 records are checked for missing word marks. An error typeout alerts the operator when a record with missing word marks is detected. The word marks are cleared before the program branches to the compare routine.

Tapes are rewound and an error summary typed out following each write and each read pass. Errors are handled as follows:

WRITE ERRORS

BNR(Not Ready)	A word mark is placed over the drive number in the ready table eliminating the drive from the test.
BWL(Wrong Length Record)	Tape is rewound and the drive eliminated from the test as for BNR and BWL.
BEF (End of Tape)	Data checks are counted in an error table.
BER(Data Check)	

READ ERRORS

BNR (Not Ready)	The drive is eliminated from the test.
BWL(Wrong Length Record)	Counted in error table.
BEF (Condition - Tape Mark)	Indicates end of read pass.
BER(Data Check)	Data checks are counted in an error table.

The operator will be notified of individual errors by a typeout similar to message 3, described on page 011 under TYPEOUTS.

The correlation between indicator number and type of error is as follows:

1	BNR L(Not Ready)
2	BCB (Busy)
4	BER (Data Check)
8	BEF (Condition)
B	BWL (Wrong Length Record)
A	BNT (No Transfer - never set)

The typeout for indicator 4, 8 and B is under control of TAD0; indicators 1, 2, A are typed out unconditionally.

One write error is counted as a temporary (TEMP) error. Two consecutive TEMP errors count as a SKIP error. Seven consecutive SKIPS count as a PERM error. This indicates bad tape and the drive is no longer used in the test.

One read error is counted as a temporary (TEMP) error; nine unsuccessful rereads count as a permanent (PERM) error.

Records which do not give a data check but compare unequal to the record as it should have been written will count as a compare (COMP) error.

This is a two-phase program. The read portion of the test will be read into memory following completion of the write phase.

.00.3 EQUIPMENT

This program will run on the 1410, 1410 Accelerator and 7010 computers. A 10K memory size is required for 2 channel operation, and a 20K memory size for 4 channel operation (7010).

All models 7330's and 729 tape drives can be used.

.00.4 CARD DECK

The program consists of 322 cards numbered 001 to 322 plus four execute cards, plus 7 load cards.

.00.5 E.C. LEVEL OF MACHINE

Not applicable.

4.xx.01.0 LOADING PROCEDURES

01.1 FROM CARDS (Load Program L1A preceding Card Deck)

A. 7010-1410 without Load Button.

1. Display Memory Location 00000

2. Alter to

v v v
RL%1100011\$.

v
X □
v ? Enter according to channel location
3 ? of the card reader.
v
1 !

3. Set to Run, Computer Reset and Start.

B. 7010 with Load Button

1. Computer Reset

2. Depress Load Button

01.2 FROM TAPE(Memory Dump Tape)

A. 7010-1410 without Load Button

1. Display Memory Location 00000

2. Alter to

v v v
RL%B000011\$.

v
X □
v ? Enter according to channel location
3 ? of the tape drive.
v
1 !

3. Set to Run, press Computer Reset.

B. 7010 with Load Button

1. Computer Reset

2. Depress Load Button

4.xx.02.0

OPERATING PROCEDURES

STANDARD TADS

TAD0	Loc. 01000	Not 1	Type individual errors when detected. Bypass individual error timeouts.
TAD1	Loc. 01001	Not 1	No loops Loop on read or write
TAD2	Loc. 01002	Not 1	No error halts Error halts
TAD3	Loc. 01003	Not 1	Single write or read pass Repeat write or read pass

SPECIAL TADS

TAD4	Loc. 01004	Not 1	Use overlap if available Don't use overlap
TAD5	Loc. 01005	Not 1	Odd parity Even parity
TAD6	Loc. 01006	Not 1	Move mode Load Mode

Before running the program, punch the system and channel control cards according to your system configuration. See the 1410/7010 Introduction for details.

For normal operations, TADs do not have to be inserted before running the program.

Before reading the test into memory, make the drives ready that are to be used in the test.

010
T021
Page 008

Following each read pass and the message INTERCHANGE TAPE if:

Multi-Channel test

Automatically loops if TAD 3 is a 1 or press START.

Interchangeability test

Systematically interchange tapes, make the drives ready at load point, then press START.

Any density may be used as long as the same density is used for writing and reading.

To read in the next test, press Computer Reset and Start when notified by an appropriate typeout.

To change the program so that after one write and one read pass the program will branch automatically to the next test; alter location 06277 (card No. 247), column S5 from 1087 to 0400.

4.xx.03.0

OPERATING HINTS

The number of writes and reads for each length record may be altered by changing location 01008 from 100 to xxx for xxx repeats.

Tape drives marked out of the test on the write pass because of a BNR, BWL, BEF or PERM WRITE ERROR will not be used during the read pass.

Because of memory space limitations, records which compare unequal must be displayed manually. Use TAD2 (1) to halt on a compare error.

To display the last record as read, display:

07000	Channel 1
08000	Channel 2
16000	Channel 3
17000	Channel 4

Until blanks are encountered.

This record can be compared to the appropriate record ID. No. in the appendix.

To display the pattern from the Console Printer, do the following:

Display index register 5 (location 00045).

Add the contents to 09000.

Display the resultant address. The first character should have a word mark, the last a word mark group mark.

Program halts follow each error typeout if TAD2 is a 1.

Scope loops are provided for each write and read instruction.

Do not read a tape which doesn't contain the full 2000 records. This will be done automatically on the first read pass. Do not interchange such tapes. An incomplete write can result from a BNR, BWL or BEF or PERM write error.

To read on a drive previously marked out of the test or not found ready when building the ready table, the drive number must be inserted manually into the ready table area as follows:

Channel 1 display 01804	In the fourth position
Channel 2 display 01842	past the last drive
Channel 3 display 01880	number insert the
Channel 4 display 01918	required drive number.

To have the program skip a channel in which ready drives have been found, place a blank in location:

01804	Channel 1
01842	Channel 2
01880	Channel 3
01918	Channel 4

Asterisk insert switch must be on to run this test.

Noise record problems should be corrected before running this test. Reading a noise record will give false W.L.R. errors on following reads.

Program Run Time

One pass using 1 729 drive overlap on each of two channels requires approximately 2.75 minutes.

One pass using 1 729 drive overlap on each of four channels requires approximately 3.75 minutes.

4.xx.04.0

PROGRAM STOPS AND RESTARTS

STOPS

Write Phase

07152 Indicator error 2 or A. Press START to continue.

Read Phase

05327 Failed to branch equal or unequal.

05901 Failed to branch equal or unequal.

06575 Indicator error 2 or A. Press START to continue.

RESTARTS

Write Phase

02000 Start of Write Phase.

Read Phase

02000 Rewind then Start Read Phase.

Press COMPUTER RESET and START to restart either phase.

4.xx.05.0

TYPEOUTS

1. T021C

The test title appears once at the start of the test.

2. CH1 3 5
CH2 3 7

This typeout indicates which drives were ready and will be used in the test for each channel.

3. INDC. 4 TD23

This indicates a data check (INDC. 4) on channel 2 drive number 3. Similar typeouts follow other types of errors (INDC. 1, 2, 8, A, B).

4. PERM WRITE ERROR TD 15

This would indicate consecutive 7 skips on channel 1 drive number 5.

5. TDS CH 1
1 3 4
TEMP
003 000 004
SKIPS
001 005 007

Sample write summary for channel 1, drive Nos. 1, 3 and 4.

6. DIDNT BR OLAF, 23

This would indicate a failure to branch overlap while writing a record on channel 2 drive number 3 (unconditional).

7. COMP ERROR TD22 REC ID. No. 5

This notifies the operator of a compare error on channel 2 drive number 2. Compare to record ID. No. 5 in appendix.

8. DIDNT BR OLAP CH 1

This would indicate a failure to branch overlap on channel 1 while reading tape (unconditional).

9. LOAD MODE FAILED CH. 1

Unconditional typeout indicating missing word mark(s) in the last record read on the specified channel.

10. TDW TDR TEMP PERM COMP
13 16 015 001 000

A header with a summary line for each drive will be typed at the end of the each Read Pass. TDW is the channel and drive the tape was written on and TDR is the channel and drive used to read the tape.

11. INTERCHANGE TAPE

This notifies the operator to interchange tape.

12. Press Start to be read or Computer Reset and Start to go next test.

This gives the operator the option to repeat the read pass or to branch and read in the next test at location 00400.

4 . xx. 05. 0 FLOW CHARTS

015
T021
Page 013

START
02000 - Title

Initialize for
Overlap or
Non-overlap
Operation

Test for
Ready
Drives

Type Ready
Drive Nos.

B

Restart Write Pass

Write
House-
keeping

Initialize to
Write next
Record on
all Drives

Step
Drive
Number

Ch 1
Tape

Check
Overlap

Err
Rout

Any
Errors

Write
Ch 1

Ch 2
Tape

Check
Overlap

Err
Rout

Any
Errors

Write
Ch 2

Ch 3
Tape

Check
Overlap

Err
Rout

Any
Errors

Write
Ch 3

Phase 1 - Write

A
No
Rec. written
on all
drives

Yes
All
Rec.
Written

No
Count
Records

Update
Write
Address

Type
Error Summary

TAD 3

1


B

Read In
Phase 2

C

A

Phase 2 - Read

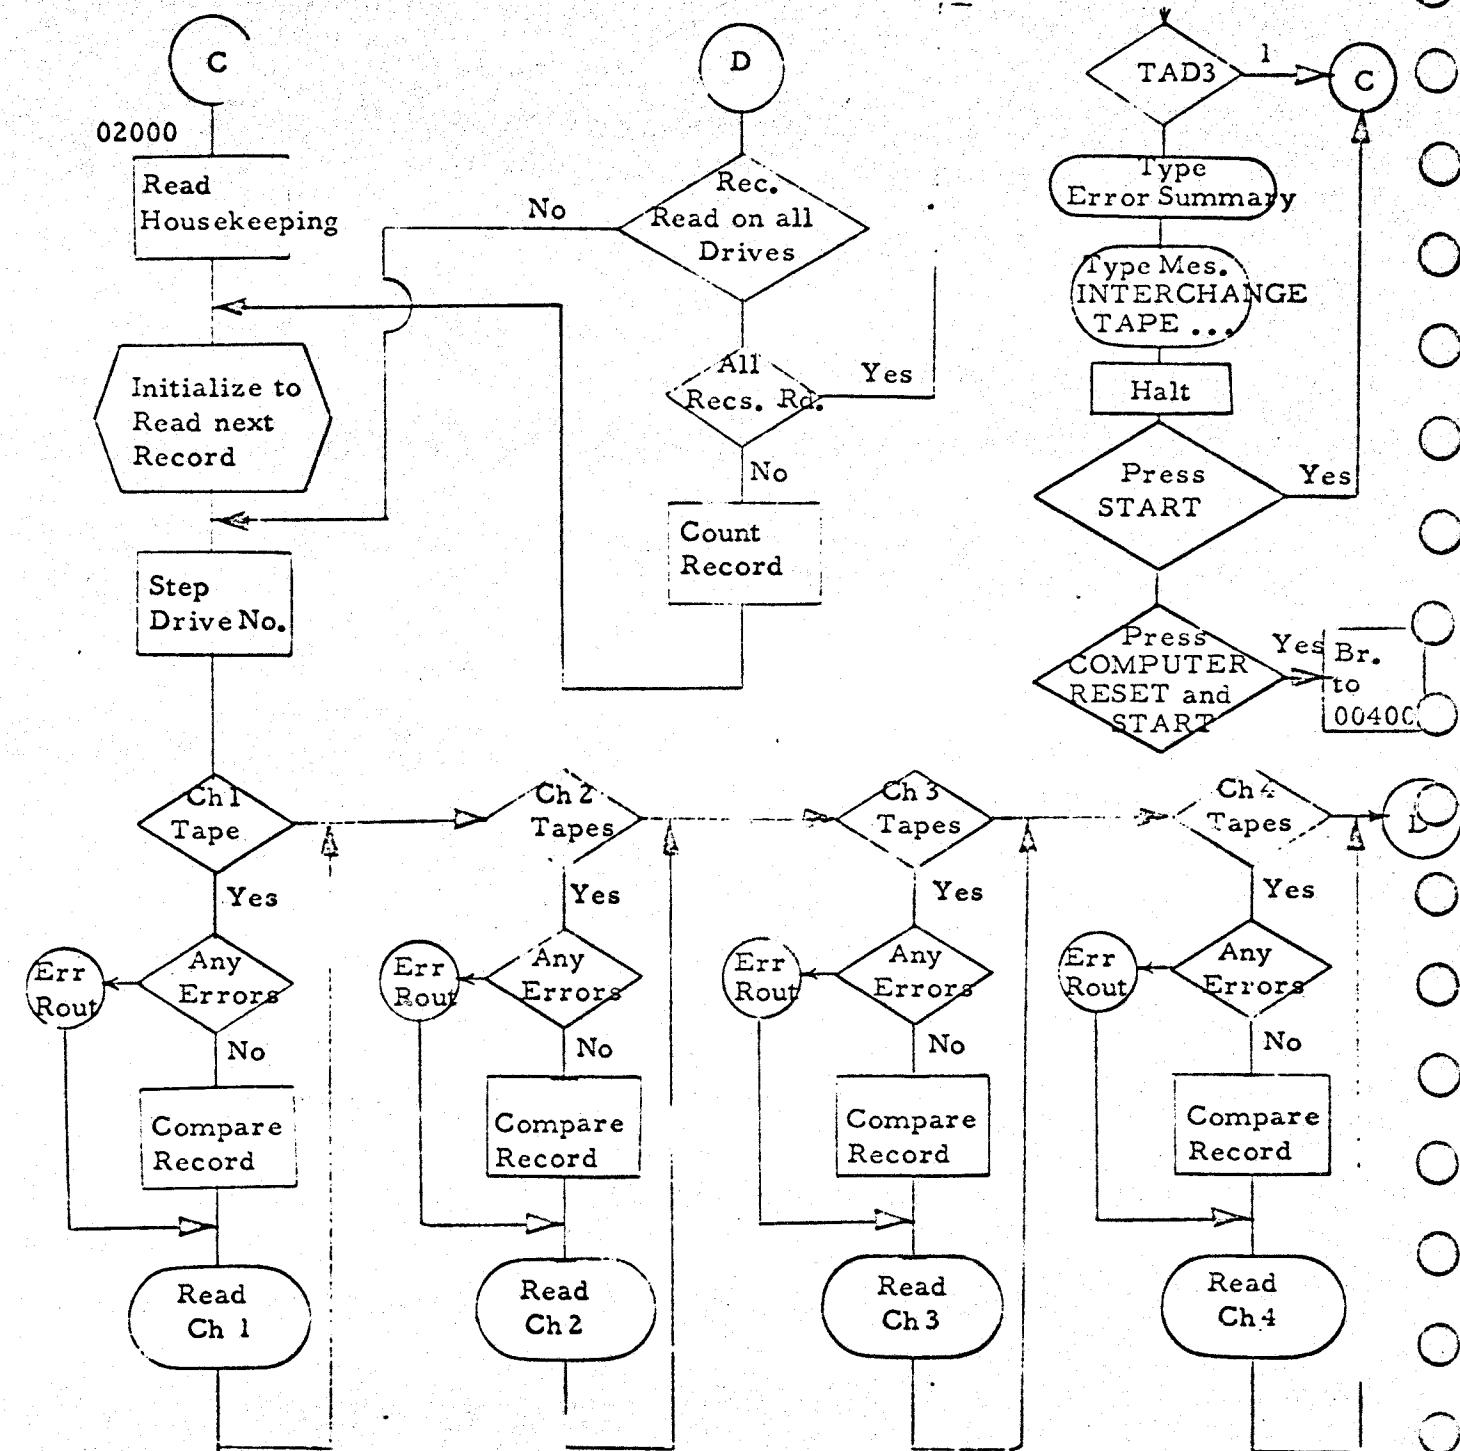

APPENDIX A

The number above the characters with word marks indicates the record ID. No. The record extends from this word mark to the ;. Each record number includes all lower numbered records. In this manner record 3 includes records 1 and 2 while record 20 includes records 1 through 19.

Example: The first 100 records written are of record ID. No. 1: 6@Y&—

The third 100 records written are of record ID. No. 3:
248&-b136@Y&-136@Y&-

018
T021

```

CTL 2
1002
1003 LOAD
1004 LOADER EQU 400
1005 ORG 1000
1006 *****
1007 * STANDARD TADS *****
1008 *****
1009 * -- NOT 1 -- -- 1 --
1010 TADO DC a a TYPE ERROR NO ERROR TYPE 1 01000
1011 * ON EACH DATA CHK
1012 * AND COMP ERROR
1013 TAD1 a a NO LOOPS LOOP 1 01001
1014 TAD2 a a NO ERROR HALTS HALT ON ERROR 1 01002
1015 TAD3 a a 1 WR OR RD PASS REPEAT PASS 1 01003
1016 *SPECIAL TADS ***
1017 TAD4 a a USE OVERLAP DONT USE OLAP 1 01004
1018 TAD5 a a ODD PARITY EVEN PARITY 1 01005
1019 TAD6 a a MOVE MODE LOAD MODE 1 01006
1020 WMGM DCW G G
1021 ONE01 DCW a1c0a NO. OF REPEATS EACH REC LENGTH. 1 01007
1022 * MULTIPLY BY 20 FOR TOTAL NO.
1023 * OF RECORDS TO BE WRITTEN.
1024 * *****
1025 * PROGRAM ALTER ROUTINE *****
1026 *****
1027 ORG 1011
1028 ITR SBR ITREXES STORE BAR FOR RETURN 1 01011 G 01085
1029 BAI *C1
1030 ITR1 RCP ITR2&4 ENTER LOC OF ALTER 7 01018 R 01025
1031 ITR1 M ITR1.M BR ANY BUT WLR OR N.I. 10 01025 M 3TO 01
1032 BN1 ITR1 BN1 ITR1.T 7 01035 R 01025
1033 ITR2 RCPW 0 RESET I/O INTERLOCK 7 01042 R 01080
1034 ITR2 RCPW 0 ENTER DATA 10 01056 L 2TO 00
1035 BEX1 ITR2.M BR ANY BUT WLR 7 01066 R 01056
1036 BAI *E1 BRANCH ANY 7 01073 R 01080
1037 ITREX1 H 0 RETURN TO PROGRAM 7 01080 J 00000
1038 * *****
1039 * STANDARD TYPE ROUTINE 1

```

T021-1 MULTI-CHANNEL INTERCHANGE TEST

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDR	INSTRUCTION
1040	*					
1041	TYP1	SBR	TYP2E5			STORE MESSAGE ADDRESS
1042		SBR	TYP3E8			DITTO
1043		BAL	*E1			FIND RETURN ADDRESS
1044	TYP2	SCNRG	0.0			SET RETURN ADDRESS
1045		SAR	TYP4E5			TYPE MESSAGE
1046	TYP3	WCP	0			BRANCH ON BUSY
1047		BCB1	TYP3			RESET INTERLOCK
1048		BAL	*E1			RETURN TO PROGRAM
1049	TYP4	B	0			
1050	*					
1051	*		CONSTANTS			
1052	*					
1053	C1	DCW	CH1-4			ERROR
1054	C2		CH2-4			
1055	C3		CH3-4			
1056	C4		CH4-4			
1057	*		READ CONSTANTS			
1058	PN1	DCW	RD11E16			PERM
1059	PM2		RD21E16			ERROR
1060	PM3		RD31E16			COUNT
1061	PM4		RD41E16			ADDRESSES
1062	CP1		RD11E21			COMP
1063	CP2		RD21E21			ERROR
1064	CP3	DCW	RD31E21			COUNT
1065	CP4		RD41E21			ADDRESSES
1066	TMPCNT		000			
1067	MMM	DCW	00			
1068	ZERO	DCW	a			
1069	ZZZ		a a			
1070	YYY		a a			
1071	*					
1072	*	DEFINE CONTROL CARDS				
1073	*					
1074	ORG	1245				IF WORD SEPARATOR THIS
1075	*					PROGRAM HAS
1076	DC	a205+r2				SEQUENCE NO. AND TOP MEM ADDRESS
1077						
						01245
						5 01249

T021-1 MULTI-CHANNEL INTERCHANGE TEST

CT ADDRS INSTRUCTION

PAGE 3

PGLIN LABEL OPCOD OPERAND

PGLIN	LABEL	OPCOD	OPERAND	CT	ADDRS	INSTRUCTION
1078	*					
1079	* TEST NUMBER AND SUFFIX					
1080		ORG	1250		01250	
1081	NUMBER	DCW	AT021A		4	01250
1082	SUFFIX	DC	AC2.G		1	01254
1083	*					
1084	* STANDARD SYSTEM CONTROL CARD					
1085	*					
1086		ORG	1256	CHARACTER & PURPOSE	COL	01256
1087	SYS1	DC	A A	ALPHA 0,1,X - 1410,1410ACC,7010	13	1 01256
1088		E1 DC	A A	0,1,3,5,7,9-10,20,40,60,80,100K	14	1 01257
1089		E2 DC	A A	SPARE	15	1 01258
1090		E3 DC	A A	1,2-CHNL1 100,132 CHAR PRINTER	16	1 01259
1091		E4 DC	A A	1,2-CHNL2 100,132 CHAR PRINTER	17	1 01260
1092		E6 DC	A A	SPARES	18-19	2 01262
1093		E7 DC	A A	1 - OVERLAP	20	1 01263
1094		E8 DC	A A	1 - PRIORITY ALERT	21	1 01264
1095		E11 DC	A A	SPARES	22-24	3 01267
1096		E12 DC	A A	1 - CHANNEL ONE PRESENT	25	1 01268
1097		E13 DC	A A	1 - CHANNEL TWO PRESENT	26	1 01269
1098		E14 DC	A A	1 - CHANNEL THREE PRESENT	27	1 01270
1099		E15 DC	A A	1 - CHANNEL FOUR PRESENT	28	1 01271
1100		E17 DC	A A	SPARES	29-30	2 01273
1101		E18 DC	A A	1 - 1401 COMPATIBILITY	31	1 01274
1102		E19 DC	A A	1 - TIMER INTERRUPT	32	1 01275
1103		E20 DC	A A	1 - REAL TIME CLOCK	33	1 01276
1104		E21 DC	A A	1 - RELOCATE AND PROTECT	34	1 01277
1105		E22 DC	A A	1 - FLOATING POINT ARITHMETIC	35	1 01278
1106		E31 DC	A A	SPARES	36-44	9 01287
1107		E32 DC	A A		45	1 01288
1108	*					
1109	*					
1110	*					
1111		ORG	1290			01290
1112	CHSTT	SBR	CHSTTRES			7 01290 G 01675.B
1113		MNNA	STARAD,SCANE10			12 01297 D 01681 01342 /
1114		SW	X11-4			6 01309 • 00075
1115		S	X11			6 01315 S 00079

TO21-1 MULTI-CHANNEL INTERCHANGE TEST

TO21

PAGE 4

PGLIN	LABEL	OPCOD	OPERAND	CT	ADDRS	INSTRUCTION
1116		A	ONES,X11	11	01321	A 01709 00079
1117	SCAN	SCNLB	9999.0	12	01332	D 09999 00000 -
1118		SBR	ADDHLD	7	01344	G 01691 8
1119		A	ONES,ADDHLD	11	01351	A 01709 01691
1120		C	ADCHLD,STOPAD	11	01362	C 01691 01686
1121		BE	CHSITR	7	01373	J 01670 S
1122		MLNA	ADDHLD,MLC65	12	01380	D 01691 01397 /
1123	MLC	MLCS	0.BCH611	12	01392	D 00000 01415 3
1124	BCH	BCE	CHINS,K1.7	12	01404	B 01463 01703 7
1125		BCE		1	01416	B
1126		BCE		1	01417	B
1127		BCE	STINS	6	01418	B 01540
1128		BCE		1	01424	B
1129		BCE		1	01425	B
1130		BCE		1	01426	B
1131		BCE	OLINS	6	01427	B 01571
1132	UPDAT	S	ONES,ADDHLD	11	01433	S 01709 01691
1133		MLNA	ADDHLD,SCANG10	12	01444	D 01691 01342 /
1134		B	SCAN	7	01456	J 01332
1135	CHINS	MLNA	ADDHLD,MLCX610	12	01463	D 01691 01485 /
1136	MLCX	MLCS	CHCODE,0EX11	12	01475	D 01692 0.Q MO 3
1137		A	THREES,ADDHLD	11	01487	A 01711 01691
1138		MLNA	ADCHLD,CTD610	12	01498	D 01691 01520 /
1139	CTD	MLCS	TDM0,0	12	01510	D 01708 00000 3
1140		S	THREES,ADDHLD	11	01522	S 01711 01691
1141	UNIT	B	UPDAT	7	01533	J 01433
1142	STINS	MLNA	ADCHLD,MLCX610	12	01540	D 01691 01562 /
1143	MLCH	MLCS	CHSTAT,0	12	01552	D 01693 00000 3
1144		B	UPDAT	7	01564	J 01433
1145	OLINS	A	SIX,ADDHLD	11	01571	A 01695 01691
1146		MLNA	ADDHLD,MLC65	12	01582	D 01691 01599 /
1147	MLCO	MLCS	0.BCS611	12	01594	D 00000 01617 3
1148	BCS	BCE	SETOL,K2,1	12	01606	B 01628 01707 1
1149		BCE		1	01618	B
1150		BCE		1	01619	B
1151		BCE		1	01620	B
1152		B	REDUCE	7	01621	J 01652

TO21-1 MULTI-CHANNEL INTERCHANGE TEST

023 PAGE 5

PLIN	LABEL	OPCODE	OPERAND	CT	ADDR	INSTRUCTION
1153	SETOL	MLNA	ADDHLD,MLCL610	12	01628	D 01691 01650 /
1154	MLCL	MLCS	BOLOM,0	12	01640	D 01694 00000 3
1155	REDUCE	S	SIX,ADDHLD	11	01652	S 01695 01691
1156		8	UPDAT	7	01663	J 01433
1157	CHSTR	8	0	7	01670	J 00000
1158	STARAD	DCW	PERR	5	01681	07352
1159	STOPAD	DCW	ERROUT	5	01686	06907
1160	ADDHLD	DCW	00000	5	01691	
1161	CHCODE	0		1	01692	
1162	CHSTAT	0		1	01693	
1163	BOLOM	1		1	01694	
1164	SIX	6		1	01695	
1165	K1	DCW	0J13XRULMA	8	01703	
1166	K2		24321a	4	01707	
1167	TDNO		a a	1	01708	
1168	ONES	1		1	01709	
1169	TWOS	DCW	a2a	1	01710	
1170	THREES	3		1	01711	
1171	RESTW	DCW	aJJ	1	01712	
1172		DC	START	5	01717	02000
1173		DC	a a	1	01718	
1174	H			1	01719	.
1175		DCW	a*a	1	01720	
1176	ORG	1289		01289		
1177	*****					
1178	\$\$STANDARD CHANNEL 1 CONTROL CARD.					
1179	ORG	1289	CHARACTER & PURPOSE	COL		
1180	CHN1	DC	a a 1 - PAPER TAPE READER	13	01289	
1181	E1	DC	a a 1 - CONSOLE PRINTER		1	01289
1182	E2	DC	a a 1 - TAPES 729/7330	14	1	01290
1183	E11	DC	a a 2 SPARES	15	1	01291
1184	E12	DC	a a R,S,C - 1402,1442,7223 READER	16-24	9	01300
1185	E13	DC	a a B - READER COLUMN BINARY FEAT.	25	1	01301
1186	E14	DC	a a P - 1402 PUNCH	27	1	01303
1187	E15	DC	a a B - PUNCH COLUMN BINARY FEAT.	28	1	01304
1188	E16	DC	a a P - 1403 PRINTER	29	1	01305
1189	E17	DC	a a A,N - ALPHA,NUMERIC PRINT CHAIN 30		1	01306

T021-1 MULTI-CHANNEL INTERCHANGE TEST

T021

PAGE 6

CT ADDRS INSTRUCTION

1190		818 DC	0 0 1.2 - 100,132 CHAR PRINT BUFFER	31	1 01307
1191		619 DC	0 0 F - 1301 FILE	32	1 01308
1192		620 DC	0 0 1 THRU 0 - 1 THRU 10 FILE MODULE	33	1 01309
1193		621 DC	0 0 1 THRU 0 - 1 THRU 10 ACCESSES	34	1 01310
1194		622 DC	0 0 R - 1311 IMPAC	35	1 01311
1195		623 DC	0 0 1 THRU 5 - 1 THRU 5 IMPAC MODULE	36	1 01312
1196		624 DC	0 0 1 - SEEK OVERLAP FEATURE	37	1 01313
1197		625 DC	0 0 1 - SCAN FEATURE	38	1 01314
1198		626 DC	0 0 1 - TRACK RECORD FEATURE	39	1 01315
1199		627 DC	0 0 F - 1405 FILE	40	1 01316
1200		628 DC	0 0 1,2,3 - 1,2,3 ARMS IN MODULE 0	41	1 01317
1201		629 DC	0 0 1,2,3 - 1,2,3 ARMS IN MODULE 1	42	1 01318
1202		630 DC	0 0 1,2,3 - 1,2,3 ARMS IN MODULE 2	43	1 01319
1203		631 DC	0 0 1,2,3 - 1,2,3 ARMS IN MODULE 3	44	1 01320
1204		632 DC	0 0 1,2,3 - 1,2,3 ARMS IN MODULE 4	45	1 01321
1205		633 DC	0 0 1 - 7750 ON THIS CHANNEL	46	1 01322
1206		634 DC	0 0 1 - 7740 ON THIS CHANNEL	47	1 01323
1207		635 DC	0 0 1 - 1440/1460 ON THIS CHANNEL	48	1 01324
1208		636 DC	0 0 1 - CHAN HAS CHANNEL EXTENDER	49	1 01325
1209		637 DC	0 0 L - LOW SPEED HYPER TAPE	50	1 01326
1210		638 DC	0 0 1,2,3-1050-1,2,0R BOTH ADAPTERS	51	1 01327
1211		639 DC	0 0 SPARES	52-68	17 01344
1212		640 DC	0 0 SPARES	69	1 01345
1213		*****			
1214		***** STANDARD CHANNEL 2 CONTROL CARD.			
1215		ORG 1346	CHARACTER & PURPOSE	COL	01346
1216	CHN2	DC	0 0 1 - PAPER TAPE READER	13	1 01346
1217		E1 DC	0 0 1 - CONSOLE PRINTER	14	1 01347
1218		E2 DC	0 0 1 - TAPES 729/7330	15	1 01348
1219		E11 DC	0 0 2 SPARES	16-24	9 01357
1220		E12 DC	0 0 R,S,C - 1402,1442,7223 READER	25	1 01358
1221		E13 DC	0 0 B - READER COLUMN BINARY FEAT.	26	1 01359
1222		E14 DC	0 0 P - 1402 PUNCH	27	1 01360
1223		E15 DC	0 0 B - PUNCH COLUMN BINARY FEAT.	28	1 01361
1224		E16 DC	0 0 P - 1403 P-INT	29	1 01362
1225		E17 DC	0 0 A,N - ALPHA,NUMERIC PRINT CHAIN	30	1 01363
1226		E18 DC	0 0 1,2 - 100,132 CHAR PRINT BUFFER	31	1 01364
1227		E19 DC	0 0 F - 1301 FILE	32	1 01365

T021-1 MULTI-CHANNEL INTERCHANGE TEST

1021

PAGE 7

025
CT ADDRS INSTRUCTION

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
1228		E20 DC	a a 1 THRU 0 - 1 THRU 10 FILE MODULE33	1	01366	
1229		E21 DC	a a 1 THRU 0 - 1 THRU 10 ACCESSSES 34	1	01367	
1230		E22 DC	a a R - 1311 IMPAC	35	1	01368
1231		E23 DC	a a 1 THRU 5 - 1 THRU 5 IMPAC MODULE36	1	01369	
1232		E24 DC	a a 1 - SEEK OVERLAP FEATURE 37	1	01370	
1233		E25 DC	a a 1 - SCAN FEATURE 38	1	01371	
1234		E26 DC	a a 1 - TRACK RECORD FEATURE 39	1	01372	
1235		E27 DC	a a F - 1405 FILE 40	1	01373	
1236		E28 DC	a a 1,2,3 - 1,2,3 ARMS IN MODULE 0 41	1	01374	
1237		E29 DC	a a 1,2,3 - 1,2,3 ARMS IN MODULE 1 42	1	01375	
1238		E30 DC	a a 1,2,3 - 1,2,3 ARMS IN MODULE 2 43	1	01376	
1239		E31 DC	a a 1,2,3 - 1,2,3 ARMS IN MODULE 3 44	1	01377	
1240		E32 DC	a a 1,2,3 - 1,2,3 ARMS IN MODULE 4 45	1	01378	
1241		E33 DC	a a 1 - 7750 ON THIS CHANNEL 46	1	01379	
1242		E34 DC	a a 1 - 7740 ON THIS CHANNEL 47	1	01380	
1243		E35 DC	a a 1 - 1440/1460 ON THIS CHANNEL 48	1	01381	
1244		E36 DC	a a 1 - CHAN HAS CHANNEL EXTENDER 49	1	01382	
1245		E37 DC	a a L - LOW SPEED HYPER TAPE 50	1	01383	
1246		E38 DC	a a 1,2,3-1050-1,2,0R BOTH ADAPTERS 51	1	01384	
1247		E55 DC	a a SPARES 52-68	17	01401	
1248		E56 DC	a*a a 69	1	01402	
1249		*****				
1250		ORG	1403 CHARACTER & PURPOSE COL	01403		
1251	CHN3	DC	a a 1 - PAPER TAPE READER 13	1	01403	
1252		E1 DC	a a 1 - CONSOLE PRINTER 14	1	01404	
1253		E2 DC	a a 1 - TAPES 729/7330 15	1	01405	
1254		E11 DC	a a a SPARES 16-24	9	01414	
1255		E12 DC	a a R,S,C - 1402,1442,7223 READER 25	1	01415	
1256		E13 DC	a a B - READER COLUMN BINARY FEAT. 26	1	01416	
1257		E14 DC	a a P - 1402 PUNCH 27	1	01417	
1258		E15 DC	a a B - PUNCH COLUMN BINARY FEAT. 28	1	01418	
1259		E16 DC	a a P - 1403 PRINTER 29	1	01419	
1260		E17 DC	a a A,N - ALPHA, NUMERIC PRINT CHAIN 30	1	01420	
1261		E18 DC	a a 1,2 - 100,132 CHAR PRINT BUFFER 31	1	01421	
1262		E19 DC	a a F - 1301 FILE 32	1	01422	
1263		E20 DC	a a 1 THRU 0 - 1 THRU 10 FILE MODULE33	1	01423	
1264		E21 DC	a a 1 THRU 0 - 1 THRU 10 ACCESSSES 34	1	01424	

TO21-1 MULTI-CHANNEL INTERCHANGE TEST

TO21 PAGE 8

INSTRUCTION

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS
1266		E22 DC	3 2 R - 1311 IMPAC	35	1 01425
1267		E23 DC	3 3 1 THRU 5 - 1 THRU 5 IMPAC MODULE36	36	1 01426
1268		E24 DC	3 3 1 - SEEK OVERLAP FEATURE	37	1 01427
1269		E25 DC	3 3 1 - SCAN FEATURE	38	1 01428
1270		E26 DC	3 3 1 - TRACK RECORD FEATURE	39	1 01429
1271		E27 DC	3 3 F - 1405 FILE	40	1 01430
1272		E28 DC	3 3 1,2,3 - 1,2,3 ARMS IN MODULE 0	41	1 01431
1273		E29 DC	3 3 1,2,3 - 1,2,3 ARMS IN MODULE 1	42	1 01432
1274		E30 DC	3 3 1,2,3 - 1,2,3 ARMS IN MODULE 2	43	1 01433
1275		E31 DC	3 3 1,2,3 - 1,2,3 ARMS IN MODULE 3	44	1 01434
1276		E32 DC	3 3 1,2,3 - 1,2,3 ARMS IN MODULE 4	45	1 01435
1277		E33 DC	3 3 1 - 7750 ON THIS CHANNEL	46	1 01436
1278		E34 DC	3 3 1 - 7740 ON THIS CHANNEL	47	1 01437
1279		E35 DC	3 3 1 - 1440/1460 ON THIS CHANNEL	48	1 01438
1280		E36 DC	3 3 1 - CHAN HAS CHANNEL EXTENDER	49	1 01439
1281		E37 DC	3 3 L - LOW SPEED HYPER TAPE	50	1 01440
1282		E38 DC	3 3 1,2,3-1050-1,2,OR BOTH ADAPTERS 51	51	1 01441
1283		E55 DC	3 a SPARES	52-68	17 01458
1284		E56 DC	a#3	69	1 01459
1285		*****			
1286		***STANDARD CHANNEL 4 CONTROL CARD.			
1287		ORG	1460	CHARACTER & PURPOSE	COL
1288	CHN4	DC	3 2 1 - PAPER TAPE READER	13	01460
1289		E1 DC	3 2 1 - CONSOLE PRINTER	14	1 01460
1290		E2 DC	3 2 1 - TAPES 729/7330	15	1 01461
1291		E11 DC	3 a SPARES	16-24	1 01462
1292		E12 DC	3 3 R,S,C - 1402,1442,7223 READER	25	1 01471
1293		E13 DC	3 3 B - READER COLUMN BINARY FEAT.	26	1 01472
1294		E14 DC	3 2 P - 1402 PUNCH	27	1 01474
1295		E15 DC	3 2 B - PUNCH COLUMN BINARY FEAT.	28	1 01475
1296		E16 DC	3 2 P - 1403 PRINTER	29	1 01476
1297		E17 DC	3 3 A,N - ALPHA.NUMERIC PRINT CHAIN 30	30	1 01477
1298		E18 DC	3 2 1,2 - 100,132 CHAR PRINT BUFFER 31	31	1 01478
1299		E19 DC	3 2 F - 1301 FILE	32	1 01479
1300		E20 DC	3 3 1 THRU 0 - 1 THRU 10 FILE MODULE33	33	1 01480
1301		E21 DC	3 3 1 THRU 0 - 1 THRU 10 ACCESSES	34	1 01481
1302		E22 DC	3 3 R - 1311 IMPAC	35	1 01482
1303		E23 DC	3 3 1 THRU 5 - 1 THRU 5 IMPAC MODULE36	36	1 01483

T021-1 MULTI-CHANNEL INTERCHANGE TEST

T021

021-1
PAGE 9

PGLIN	LABEL	OPCODE	OPERAND	CT	ADRS	INSTRUCTION
1304		E24 DC	a a 1 - SEEK OVERLAP FEATURE	37		1 01484
1305		E25 DC	a a 1 - SCAN FEATURE	38		1 01485
1306		E26 DC	a a 1 - TRACK RECORD FEATURE	39		1 01486
1307		E27 DC	a a F - 1405 FILE	40		1 01487
1308		E28 DC	a a 1,2,3 - 1,2,3 ARMS IN MODULE 0	41		1 01488
1309		E29 DC	a a 1,2,3 - 1,2,3 ARMS IN MODULE 1	42		1 01489
1310		E30 DC	a a 1,2,3 - 1,2,3 ARMS IN MODULE 2	43		1 01490
1311		E31 DC	a a 1,2,3 - 1,2,3 ARMS IN MODULE 3	44		1 01491
1312		E32 DC	a a 1,2,3 - 1,2,3 ARMS IN MODULE 4	45		1 01492
1313		E33 DC	a a 1 - 7750 ON THIS CHANNEL	46		1 01493
1314		E34 DC	a a 1 - 7740 ON THIS CHANNEL	47		1 01494
1315		E35 DC	a a 1 - 1440/1460 ON THIS CHANNEL	48		1 01495
1316		E36 DC	a a 1 - CHAN HAS CHANNEL EXTENDER	49		1 01496
1317		E37 DC	a a L - LOW SPEED HYPER TAPE	50		1 01497
1318		E38 DC	a a 1,2,3-1050-1,2,0R BOTH ADAPTERS	51		1 01498
1319		E55 DC	a a SPARES	52-68		17 01515
1320		E56 DC	a+a	69		1 01516
1321		ORG	1800			01800
1322	CH1	DA	1X37.G			01800
1323	CH2	DA	1X37.G			01838
1324	CH3	DA	1X37.G			01876
1325	CH4	DA	1X37.G			01914
1326		DCW	~M~			1 01952
1327	*	***** READ CONSTANTS *****				
1328	RESTR	DCW	EREWND			5 01957 05390
1329	NXTST	DCW	00400			5 01962
1330	TM1	DCW	R011E11			5 01967 02900
1331	TM2	DCW	RD21E11			5 01972 03107
1332	TM3	TM3	RD31E11		COUNT	5 01977 03314
1333	TM4	TM4	RD41E11		ADDRESSES	5 01982 03521
1334	*	***** START OF TEST *****				
1335	*	***** START OF TEST *****				
1336	*	***** START OF TEST *****				
1337		ORG	2000			02000
1338	START	NOP				1 02000 N
1339		WCP	NUMBR			10 02001 M 210 01250 W
1340		BAL	**-16			7 02011 R 02001 H
		CW	START1			6 02018 D 02001
			ONLY ONCE			

T021-1 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 10

CT ADDRS INSTRUCTION

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
1342		CS 99	CLEAR INDEX REGS	6	02024	/ 00099
1343		MRCWM RESTW.1	MOVE RESTART BR TO LOC 1	12	02030	D 01712 00001 H
1344		NOP		1	02042	N
1345	MRSW	B MRCW		7	02043	J 08396
1346		S ZRE		6	02050	S 09958
1347		BNQ ITR		7	02056	J 01011 Q
1348	*	ROUTINE TO INITIALIZE RDY TBL ROUTINE	*****			
1349	*	ROUTINE TO INITIALIZE RDY TBL ROUTINE	*****			
1350	*	ROUTINE TO INITIALIZE RDY TBL ROUTINE	*****			
1351		CW SW6161,SW6261		11	02063	D 02448 02493
1352		CW SW6361,SW6461		11	02074	D 02545 02597
1353		CS CH4636	CLEAR READY TABLE	6	02085	/ 01950
1354		CS CH1,CH2	RESTORE	1	02091	/
1355		SW CH3,CH4	WORDMARKS	11	02092	* 01800 01838
1356		SW X13-4		11	02103	* 01876 01914
1357		SW		6	02114	* 00085
1358	*	*****SET UP OLAP OR NO-OLAP*****	*****			
1359		BCE *E8,TAD4,1		12	02120	B 02139 01004 1
1360		B *E8	USE OLAP TAD4 NOT 1	7	02132	J 02146
1361		B NNCLAP		7	02139	J 02276
1362		BCE *E8,SYSL67,1		12	02146	B 02165 01263 1
1363		H NNCLAP		7	02158	J 02276
1364		SW OLAP1,OLAP2	TEST OLAP SW	11	02165	* 04468 05069
1365		SW OLAP3,OLAP4		11	02176	* 05670 06271
1366		SW NOWT161,NOWT261		11	02187	* 04163 04764
1367		SW NOWT361,NOWT461		11	02198	* 05365 05966
1368		MLCS a3a,WRITE161	MOVE	12	02209	D 06851 04458 3
1369		MLCS a*2,WRITE261	CODES	12	02221	D 08852 05059 3
1370		MLCS a\$2,WRITE361	WRITE	12	02233	D 08853 05660 3
1371		MLCS a#2,WRITE461	READ	12	02245	D 08854 06261 3
1372		MLCA a a,OPMSG625		12	02257	D 08856 03863 1
1373		B SW61		7	02269	J 02447
1374		NNOLAP MLCS a%2,WRITE161		12	02276	D 08857 04458 3
1375		MLCS a%2,WRITE261		12	02288	D 08858 05059 3
1376		MLCS a%a,WRITE361		12	02300	D 08859 05660 3
1377		MLCS a.%2,WRITE461		12	02312	D 08860 06261 3
1378		CW OLAP1,OLAP2		11	02324	D 04468 05069
1379		MLCA aUNa,OPMSG625		12	02335	D 08862 03863 1

T021-1 MULTI-CHANNEL INTERCHANGE TEST

029 PAGE 11

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDR	INSTRUCTION
1380	NOPLAY	CW	OLAP3,OLAP4	11	02347	□ 05670 06271
1381		CW	SCL0P1,SCL0P2	11	02358	□ 04436 05037
1382		CW	SCL0P3,SCL0P4	11	02369	□ 05638 06239
1383		RCE	*68,SYSL67,1	12	02380	B 02399 01263 1
1384		B	SW61	7	02392	J 02447
1385		SW	OLAP1,OLAP2	11	02399	* 04468 05069
1386		SW	OLAP3,OLAP4	11	02410	* 05670 06271
1387		NOPWM		1	02421	N
1388	I8A	B	RDYMSG	7	02422	J 02780
1389		B	SW61	7	02429	J 02447
1390	CHALT	A	E1,X15	11	02436	A 08863 00099
1391	SW61	NOPWM		1	02447	N
1392		B	SW62	7	02448	J 02492
1393		SW	SW61E1	6	02455	* 02448
1394		MLCB	ECH1,X13	12	02461	D 08868 00089 L
1395		BCE	TEST,SYSL612,1	12	02473	B 02648 01268 1
1396		B	CHALT	7	02485	J 02436
1397	SW62	NOPWM		1	02492	N
1398		B	SW63	7	02493	J 02544
1399		SW	SW62E1	6	02500	* 02493
1400		BCE	CH1A,SYSL613,1	12	02506	B 02525 01269 1
14C1		B	CHALT	7	02518	J 02436
14C2	CH1A	MLCB	ECH2,X13	12	02525	D 08873 00089 L
14C3		B	TEST	7	02537	J 02648
1404	SW63	NOPWM		1	02544	N
1405		B	SW64	7	02545	J 02596
14C6		SW	SW63C1	6	02552	* 02545
14C7		BCE	CH2A,SYSL614,1	12	02558	B 02577 01270 1
14C8		B	CHALT	7	02570	J 02436
14C9	CH2A	MLCB	ECH3,X13	12	02577	D 08878 00089 L
1410		B	TEST	7	02589	J 02648
1411	SW64	NOPWM		1	02596	N
1412		B	RDYMSG	7	02597	J 02780
1413		SW	SW64E1	6	02604	* 02597
1414		BCE	CH3A,SYSL615,1	12	02610	B 02629 01271 1
1415		B	RDYMSG	7	02622	J 02780
1416	CH3A	MLCB	ECH4,X13	12	02629	D 08883 00089 L
1417		B	TEST	7	02641	J 02648

T021-1 MULTI-CHANNEL INTERCHANGE TEST

PAGE 12

T021 INSTRUCTION

PGLIN	LABEL	OPCOD	OPERAND	CT	ADDRS	INSTRUCTION
1418	TEST	MLCS	CHOPEXIS,REWIND&1 MOVE	12	02648	D 09IFO 02732 3
1419		MLCS	TANBEXIS,BUSY CHANNEL	12	02660	D 09IF8 02736 3
1420		MLCS	TANBEXIS,NCTRDY OP CODES	12	02672	D 09IF8 02743 3
1421	STEPDR	MLCS	20&.REWIND&3 ZERO REWIND	12	02684	D 08884 02734 3
1422		SW	REWIND&3 ADD ONE	6	02696	* 02734
1423		A	61,REWIND&3 TO DRIVE	11	02702	A 08863 02734
1424		CW	REWIND&3 NUMBER	6	02713	□ 02734
1425		BCE	CHALT,REWIND&3,0 BR IF DR NO IS ZERO	12	02719	B 02436 02734 0
1426	REWIND	RWD	11 REWIND	5	02731	U #U1 R
1427	BUSY	BEXI	REWIND,1 BR ANY BUT NOT READY	7	02736	R 02731 T
1428	NOTRDY	BAI	STEPDR BR NOT READY	7	02743	R 02696 M
1429		A	64,X13	11	02750	A 08885 00089 Q
1430		MLCS	REWIND&3,06X13 MOVE DR NO TO RDYBL	12	02761	D 02734 00W40 3
1431		B	STEPDR TEST NEXT DR	7	02773	J 02696
1432	RDYMSG	MLCA	CH1636,CH1T	12	02780	D 01836 02914 T
1433		MLCA	CH2636,CH2T	12	02792	D 01874 02981 T
1434		MLCA	CH3636,CH3T	12	02804	D 01912 03048 T
1435		MLCA	CH4636,CH4T	12	02816	D 01950 03115 T
1436		B	TYPL	7	02828	J 01087
1437		DCW	@ READY DRIVES&6	13	02847	
1438		BCE	*68,SYSL1612,1	12	02849	B 02868 01268 1
1439		B	CH2TX	7	02861	J 02916
1440		B	TYPL	7	02868	J 01087
1441	CH1T	DCW	@CH1	40	02914	
1442	CH2TX	BCE	*68,SYSL1613,1	12	02916	B 02935 01269 1
1443		B	CH3TX	7	02928	J 02983
1444		B	TYPL	7	02935	J 01087
1445	CH2T	DCW	@CH2	40	02981	
1446	CH3TX	BCE	*68,SYSL1614,1	12	02983	B 03002 01270 1
1447		B	CH4TX	7	02995	J 03050
1448		B	TYPL	7	03002	J 01087
1449	CH3T	DCW	@CH3	40	03048	
1450	CH4TX	BCE	*68,SYSL1615,1	12	03050	B 03069 01271 1
1451		B	HSKPW	7	03062	J 03117
1452		B	TYPL	7	03069	J 01087
1453	CH4T	DCW	@CH4	40	03115	
1454	*	*	***** WRITE INITIALIZATION *****			
1455	*	*	*****			

PCLIN	LABEL	OPCODE	OPERAND	CT	AUDRS	INSTRUCTION
1456						
1457	HSKPW	BHQ	ITR			INITIALIZE ODD-EVEN PARITY. MOVE-LOAD MODE *****
1458	*					PRESS INQUIRY REQUEST TO
1459	*					ENTER SPECIAL TADS 4-6
1460	BCE	E PARTY.TADS.1	BR IF ODD PARITY	12	03124	8 03203 01005 1
1461	MLCS	0B0. WRITE162	ODD PARITY CODES	12	03136	0 08886 04459 3
1462	MLCS	0B0. WRITE262	ODD PARITY CODES	12	03148	0 08886 05060 3
1463	MLCS	0B0. WRITE362	ODD PARITY CODES	12	03160	0 08886 05661 3
1464	MLCS	0B0. WRITE462	ODD PARITY CODES	12	03172	0 08886 06262 3
1465	MLCA	0 CDD0. OPMSG63		12	03184	0 08890 03841 1
1466	B	MODE		7	03196	J 03263
1467	E PARTY	0U0. WRITE162	EVEN PARITY CODES	12	03203	0 08891 04459 3
1468	MLCS	0U0. WRITE262	EVEN PARITY CODES	12	03215	0 08891 05060 3
1469	MLCS	0U0. WRITE362	EVEN PARITY CODES	12	03227	0 08891 05661 3
1470	MLCS	0U0. WRITE462	EVEN PARITY CODES	12	03239	0 08891 06262 3
1471	MLCA	0 EVEN0. OPMSG63		12	03251	0 08895 03841 1
1472	BCE	L MODE.TADS.1	BR IF LOAD MODE	12	03263	8 03342 01006 1
1473	MLCS	0M0. WRITE1	MOVE MODE CODES	12	03275	D 08896 04457 3
1474	MLCS	0M0. WRITE2	MOVE MODE CODES	12	03287	D 08896 05058 3
1475	MLCS	0M0. WRITE3	MOVE MODE CODES	12	03299	D 08896 05659 3
1476	MLCS	0M0. WRITE4	MOVE MODE CODES	12	03311	D 08896 06260 3
1477	MLCA	0 MOVE0. OPMSG616		12	03323	D 08900 03854 1
1478	B	LMCK		7	03335	J 03402
1479	L MODE	0L0. WRITE1	LOAD MODE CODES	12	03342	D 08901 04457 3
1480	MLCS	0L0. WRITE2	LOAD MODE CODES	12	03354	D 08901 05058 3
1481	MLCS	0L0. WRITE3	LOAD MODE CODES	12	03366	D 08901 05659 3
1482	MLCS	0L0. WRITE4	LOAD MODE CODES	12	03378	D 08901 06260 3
1483	MLCA	0LCAD0. OPMSG616		12	03390	D 08905 03854 1
1484	LMCK	SW	SET 5 WORD MARKS IN PATTERN	6	03402	* 09954
1485		SW		1	03408	*
1486		SW		1	03409	*
1487		SW		1	03410	*
1488	#DOUT	CW		1	03411	*
1489		CW	SW15. SW45	11	03412	H 05109 06311
1490		CW	SW15. SW35	11	03423	H 04508 05710
1491	MINA	EPERR. STARAD		12	03434	D 08910 01681 /
1492	MINA	CERROUT. STCPAD		12	03446	D 0H915 01686 /
1493	MLCA	CHIC36. NO1636	MOVE READY	12	03458	D 01836 07491 /

PGLIN

LABEL

T021-1 MULTI-CHANNEL INTERCHANGE TEST

CT ADDRS INSTRUCTION

PGLIN	LABEL	OPCODE	OPERAND	DRIVE NUMBERS	TO ERROR SUMMARY	MESSAGE	CT	ADDRS	INSTRUCTION
1494		MLCA	CH2E36,NO2E36				12	03470	D 01874 07675 T
1495		MLCA	CH3E36,NO3E36				12	03482	D 01912 07859 T
1496		MLCA	CH4E36,NO4E36				12	03494	D 01950 08043 T
1497		MRCNG	TOTALS,TOT11	ZERO			12	03506	D 08358 07512 L
1498		MRCNG	TOTALS,TOT12	ERROR			12	03518	D 08358 07570 D
1499		MRCNG	TOTALS,TOT21	COUNT			12	03530	D 08358 07696 D
1500		MRCNG	TOTALS,TOT22	AREAS			12	03542	D 08358 07754 L
1501		MRCNG	TOTALS,TOT31	IN ERROR			12	03554	D 08358 07880 D
1502		MRCNG	TOTALS,TOT32	MESSAGES			12	03566	D 08358 07938 D
1503		MRCNG	TOTALS,TOT41				12	03578	D 08358 08064 D
1504		MRCNG	TOTALS,TOT42				12	03590	D 08358 08122 L
1505		S WKARS		INITIALIZE UPDATE ROUTINE	*****		6	03602	S 08317
1506		S TMPCNT					6	03608	S 01220
1507		S PRMCNT					6	03614	S 08309
1508		SW PATRN&2,FRECH		UPDATE HSKP	*****		11	03620	* 09002 06349
1509		CW IDW1, IDW2		INITIALIZE			11	03631	□ 04362 04963
1510		CW IDW3, IDW4		I D PORTION			11	03642	□ 05564 06165
1511		SW X5-4		ZERO			6	03653	* 00045
1512		S X5		X5			6	03659	S 00049
1513		SW SWF1E1,SWF2E1					11	03665	* 03949 04550
1514		SW SWF3E1,SWF4E1					11	03676	* 05151 05752
1515		CW CH1W,CH2W		INITIALIZE RDY			11	03687	□ 03915 04516
1516		CW CH3W,CH4W		DRV CHECK			11	03698	□ 05117 05718
1517		BCE *E8,CH1E4,		SET SWITCHES			12	03709	§ 03728 01804
1518		B *E7					7	03721	J 03734
1519		SW CH1W		TO MARK			6	03728	* 03915
1520		BCE *E8,CH2E4,					12	03734	§ 03753 01842
1521		B *E7		THAT THERE			7	03746	J 03759
1522		SW CH2W					6	03753	* 04516
1523		BCE *E8,CH3E4,		ARE NO			12	03759	§ 03778 01880
1524		B *E7					7	03771	J 03784
1525		SW CH3W		READY DRIVES			6	03778	* 05117
1526		BCE *E8,CH4E4,					12	03784	§ 03803 01918
1527		B *E7		ON A CHANNEL			7	03796	J 03809
1528		SW CH4W					6	03803	* 05718
1529		*****							
1530		***** TYPE OPERATING CONDITIONS ONCE *****							
1531		*****							

T021-1 MULTI-CHANNEL INTERCHANGE TEST

033
PAGE 15

PGLIN	LABEL	OPCOD	OPERAND	CT	ADDRS	INSTRUCTION
1532		NOPWM			1	03809 N
1533	COND\$W	B INC			7	03810 J 03872
1534		B TYP1			7	03817 J 01087
1535		DCW @ USINGA,G			6	03829
1536		B TYP1			7	03831 J 01087
1537	OPMSG	DCW @ PARITY,	MODE, OVERLAP@.G		33	03838
1538	INQ	BNQ ITR	INQUIRY		7	03872 J 01011 Q
1539	*	*****	*****			
1540	*	*****	TAPE WRITE ROUTINE			
1541	*	*****	*****			
1542	WROUT	SW ZEROE2,ZERO&4	START NEXT REC		11	03879 * 01225 01227
1543		SW			1	03890 *
1544		SW X1-4	CLEAR INDEX		6	03891 * 00025
1545		S X1	REGISTERS		6	03897 S 00029
1546	UPDATE	A 64,X1	STEP DRIVE NO		11	03903 A 08885 00029
1547	*	*****	*****			
1548	*	*****	CHANNEL ONE WRITE			
1549	*	*****	*****			
1550		NOPWM	SWITCH		1	03914 N
1551	CH1W	B *E8	BR IF NO RDY TAPES		7	03915 J 03929
1552		A SWF1	TAPES ON CH1		7	03922 J 03948
1553	PS1L	CW ZEROE1	MARK NO TAPES CH1		6	03929 D 01224
1554		SH SWF1E1	SKIP OLAP TEST		6	03935 * 03949
1555		B CH2W-1	BR CH2		7	03941 J 04515
1556	SWF1	NOPWM			1	03948 N
1557		B IDWIX	BR FIRST TIME		7	03949 J 04355
1558	*	*****	CHECK OVERLAP *****			
1559		BW STM1,CH1-4EX1	DRV OUT OF TEST IF WM		12	03956 V 04156 01776 1
1560		BEX1 NOW1..	BR ANY BUT DATA CHK		7	03968 R 04162 *
1561		MLCS WRITE1E3,MSG11E15	IDENTIFY		12	03975 D 04460 04064 3
1562		MLCS WRITE1E3,MSG12E15	DR NO		12	03987 D 04460 04134 3
1563		BW AVAIL1,OLAPG1	BR IF OLAP ON		12	03999 V 04093 08301 1
1564		BCE *E8,SYSL67+1	BR OLAP AVAIL		12	04011 B 04030 01263 1
1565		B NOW1E8	BR IF NO OLAP AVAIL		7	04023 J 04170
1566	BCE	NOW1,TAD4+1	BR IF NOT USING OLAP		12	04030 B 04162 01004 1
1567	ERR1	B TYP1	TYPE ROUT		7	04042 J 01087
1568	MSG11	DCW ADDINT BR CLAP,1 2.G			16	04049

T021-1 MULTI-CHANNEL INTERCHANGE TEST

634 PAGE 16

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
1569		BCE	*E8,TAD2,1		12	04066 8 04085 01002 1
1570		B	*E2		7	04078 J 04085
1571	HALT11	H			1	04085
1572	NOHLT1	B	STWMI		7	04086 J 04156
1573	AVAIL1	ACE	MSG12-7,TAD4,1		12	04093 8 04112 01004 1
1574		B	STWMI		7	04105 J 04156
1575		B	TYPE1		7	04112 J 01087
1576	MSG12	DCW	ABRANCHED OLAP,1 3,6		16	04119
1577		BCE	*E8,TAD2,1		12	04136 8 04155 01002 1
1578		B	*E?		7	04148 J 04156
1579	HALT12	H			1	04155
1580	STWMI	CW	OLAPC1		6	04156 □ 08301
1581	NOWTM1	NOPWM			1	04162 N
1582		BOL1	*-7	LOOP	7	04163 J 04162 1
1583	NOLAP1	BA1	*E8		7	04170 R 04184 H
1584		B	NOER1		7	04177 J 04348
1585		BW	CH2W-1,CH1EX1		12	04184 V 04515 01840 1
1586		MLCS	WRITE1&3,MSG12&15		12	04196 D 04460 04134 3
1587		MRCG	MSG12&14,MSGERC14		12	04208 D 04133 07075 \$
1588		MLCS	WRITE1&1.CHCODE		12	04220 D 04458 01692 3
1589		MLCS	3RA,CHSTAT		12	04232 D 08916 01693 3
1590		MLCS	WRITE1&3,TONO		12	04244 D 04460 01708 3
1591		MLNA	C1,DRFINW5		12	04256 D 01162 07176 /
1592		MLNA	T11,ADDP10		12	04268 D 08322 07234 /
1593		MLNA	T12,ADDP10		12	04280 D 08327 07281 /
1594		MLNA	C1,DRNGE5		12	04292 D 01162 07369 /
1595		MLCS	ai2,PMMSG617		12	04304 D 08917 07394 3
1596		B	ERROUT		7	04316 J 06907
1597		SW	SW15		6	04323 * 04508
1598		BW	NOER1,CH1-4&X1		12	04329 V 04348 01726 1
1599		B	WRITE1		7	04341 J 04457
1600	NOER1	B	RESET		7	04348 J 08251
1601	IDWIX	CW	SWF1&1		6	04355 □ 03949
1602		NOP			1	04361 N
1603	IDW1	B	NOIDW1		7	04362 J 04393
1604	FREC1	MLCS	CH1EX1,PATRN1		12	04369 D 01840 09001 3
1605		MLCS	ai2,PATRN		12	04381 D 08917 09000 3
1606	NOIDW1	MLCS	CH1EX1,WRITE1&3		12	04393 D 01840 04460 3

T021-1 MULTI-CHANNEL INTERCHANGE TEST

PGLIN	LABEL	OPCOD	OPERAND		CT	ADDRS	INSTRUCTION
1607		BCE	PS11,CH1&X1.	PASS OVER	12	04405	B 03929 018#0
1608		BW	CH2W-1,CH1&X1	BR- DRV OUT OF TEST	12	04417	V 04515 018#0 1
1609		CW	NIPWM	ERROR SUMMARY CH 1	6	04429	D 07425
1610		NOP		SWITCH	1	04435	N
1611	SCL0P1	BOL1	*-6	WAIT IF SCOPE LOOP	7	04436	J 04436 1
1612		BA1	*E1	FOR SCOPE LOOP	7	04443	R 04450 M
1613		BNQ	IIR	INQUIRY REQUEST	7	04450	J 01011 Q
1614	WRLTE1	WTB	1.1.PATRNEXS		10	04457	M #B1 09##0 W
1615		NOPWM		SWITCH	1	04467	N
1616	OLAP1	BOL1	MOL1	BR-OLAP	7	04468	J 04489 1
1617		BCB1	WRITE1	- BUSY	7	04475	R 04457 2
1618		B	*E7		7	04482	J 04495
1619	MOL1	SW	OLAP61	MARK OLAPED	6	04489	* 08301
1620		BCE	SCLOP1-1,TAD1.1	SCOPE LOOP	12	04495	B 04435 01001 1
1621		NOPWM		RE-READ	1	04507	N
1622	SW15	B	NOWT1	SWITCH	7	04508	J 04162
1623		NOPWM			1	04515	N
1624	CH2W	B	*E8	CH3	7	04516	J 04530
1625	*	*	*	***** CHANNEL TWO WRITE *****			
1626	*	*	*				
1627	*	*	*				
1628		B	SWF2	BR IF TAPES ON CH2	7	04523	J 04549
1629	PS22	CW	ZERO62	MARK NO TAPES CH2	6	04530	D 01225
1630		SW	SWF2&1	TO SKIP OLAP TEST	6	04536	* 04550
1631		B	CH3W-1	BR CH3	7	04542	J 05116
1632	SWF2	NOPWM			1	04549	N
1633		B	LOW2X	BR FIRST TIME	7	04550	J 04956
1634	*	*	*	CHECK OVERLAP *****			
1635		BW	STWM2,CH2-4&X1	DRV OUT OF TEST IF WM	12	04557	V 04757 018#4 1
1636		REX2	NOWT2,*	BR ANY BUT DATA CHK	7	04569	X 04763 *
1637		MLCS	WRITE2&3,MSG21&15	IDENTIFY	12	04576	D 05061 04665 3
1638		MLCS	WRITE2&3,MSG22&15	DR NO	12	04588	D 05061 04735 3
1639		BW	AVAIL2,OLAP&2	BR IF OLAP ON	12	04600	V 04694 08302 1
1640		BCE	*E8,SYSL&7.1	BR IF OLAP AVAIL	12	04612	B 04631 01263 1
1641		B	NOWT2&8	BR IF NO OLAP AVAIL	7	04624	J 04771
1642		BCE	NOWT2,TA04.1	BR IF NOT USING OLAP	12	04631	B 04763 01004 1
1643	ERR2	B	TYPE1	TYPE ROUT	7	04643	J 01087
1644	MSG21	DCW	#DIDNT BR CLAP,2,&C		16	04650	

T021-1 MULTI-CHANNEL INTERCHANGE TEST

PAGE 18

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
1645		BCE	*E8,TAD2.1	12	04667	B 04686 01002 1
1646		B	*E2	7	04679	J 04687
1647	H			1	04686	*
1648		B	STWM2	HALT		
1649	AVAIL2	BCE	MSG22-7.TAD4.1	BR IF NOT USING OLAP	7	04687 J 04757
1650		B	STWM2	BR IF USING OLAP	12	04694 B 04713 01004 1
1651		B	TYP1		7	04706 J 04757
1652	MSG22	DCW	ABRANCHED OLAP.2 @,6	HALT TAD	7	04713 J 01087
1653		BCE	*E8,TAD2.1	AROUND HALT	16	04720
1654		B	*E2	HALT	12	04737 B 04756 01002 1
1655		H		RESET OLAP SWITCH	7	04749 J 04757
1656	STWM2	CW	OLAPE2		1	04756 *
1657	NOWT2	NOPWM			6	04757 □ 08302
1658		BOL2	*E7	LOOP	1	04763 N
1659	NOLAP2	BA2	*E8	BR ANY ERRORS	7	04764 J 04763 2
1660		B	NOER2		7	04771 X 04785 G
1661		BW	CH3W-1.CH2EX1	BR IF DRV WENT NTRDY	12	04785 V 05116 01878 1
1662		MLCS	WR1TE2@3.MSG22@15		12	04797 D 05061 04735 3
1663		MRG	MSG22@14.MSGER@14	DR & CH TO MSG	12	04809 D 04734 07075 \$
1664		MLCS	WR1TE2@1.CHCODE	CHANNEL	12	04821 D 05059 01692 3
1665		MLCS	@X@.CHSTAT	ALTER	12	04833 D 08918 01693 3
1666		MLCS	WR1TE2@3.TCNO	ROUTINE SET-UP	12	04845 D 05061 01708 3
1667		MLNA	C2.DRFIN@5		12	04857 D 01167 07176 /
1668		MLNA	C2.DRN@5	ERROR	12	04869 D 01167 07369 /
1669		MLNA	T21.ADDTEL@	TABLE	12	04881 D 08332 07234 /
1670		MLNA	T22.ADDPE1@	ADDRESSES	12	04893 D 08337 07281 /
1671		MLCS	@2@.PMMSG@17		12	04905 D 08919 07394 3
1672		B	ERROUT		7	04917 J 06907
1673		SW	SW25	SWITCH FOR RE-WRITE	6	04924 * 05109
1674		BW	NOER2.CH2-4EX1	NEXT WR ON INDC. 1,8	12	04930 V 04949 01874 1
1675		B	WRITE2		7	04942 J 05058
1676	NOER2	B	RESET	CLEAR ERR COUNT	7	04949 J 08251
1677	IOW2X	CW	SWF2@1	CLEAR SWITCH	6	04956 □ 04550
1678		NOP			1	04962 N
1679	IDW2	B	NOIDW2	BR ARND IDENT MOVES	7	04963 J 04994
1680	FREC2	MLCS	CH2EX1.PATRN@1		12	04970 D 01878 09001 3
1681		MLCS	@2@.PATRN		12	04982 D 08919 09000 3
1682	NOIDW2	MLCS	CH2EX1.WRITE2@3	MOVE OR NO	12	04994 D 01878 05061 3

T021-1 MULTI-CHANNEL INTERCHANGE TEST

C27 PAGE 19

PGIN	LABEL	OPCOD	OPERAND	CT	ADDRS	INSTRUCTION
1683		BW	CH3W-1.CH2EX1	12	05006	V 05116 018T8 1
1684		BCE	PS22.CH2EX1.	12	05018	B 04530 018T8
1685		CW	NTPW2	6	05030	D 07609
1686		NOP		1	05036	N
1687	SCL0P2	BOL2	*-6	7	05037	J 05037 2
1688		BA2	*E1	7	05044	X 05051 H
1689		BNC	ITR	7	05051	J 01011 Q
1690	WRITE2	WTB	21.PATRNEX5	10	05058	M DRI 09#*0 W
1691		NOPWM		1	05068	N
1692	OLAP2	BOL2	MOL2	7	05069	J 05090 2
1693		BCB2	WRITE2	7	05076	X 05058 2
1694		B	*E7	7	05083	J 05096
1695	MOL2	SW	OLAP62	6	05090	* 08302
1696		BCE	SCL0P2-1.TADL.1	12	05096	B 05036 01001 1
1697		NOPWM		1	05108	N
1698	SW25	B	NOWT2	7	05109	J 04763
1699		NOPWM		1	05116	N
1700	CH3W	B	*E8	7	05117	J 05131
1701	*		CHANNEL THREE WRITE			
1702	*		*****			
1703	*		*****			
1704		B	SWF3	7	05124	J 05150
1705	PS33	CW	ZER0E3	6	05131	D 01226
1706		SW	SWF3E1	6	05137	* 05151
1707		B	CH4W-1	7	05143	J 05717
1708	SWF3	NOPWM		1	05150	N
1709		B	IDW3X	7	05151	J 05557
1710	*		***** CHECK OVERLAP *****			
1711		BW	STWM3.CH3-4EX1	12	05158	V 05358 018X2 1
1712		DCW	032	1	05170	
1713		DC	NOWT4	5	05175	05985
1714		DC	0.0.4			
1715		MLCS	WRITE3E3.MSG31E15	1	05176	
1716		MLCS	MOVE.DR NO	12	05177	D 05662 05266 3
1717		BW	WRITE3E3.MSG32E15	12	05189	D 05662 05336 3
1718		BCE	TO MSG	12	05201	V 05295 08303 1
1719		B	AVAIL3.OLAP63	12	05213	B 05232 01263 1
			BR IF OVERLAP			
			BR IF OLAP AVAIL			
			BR IF NO OLAP AVAIL			

TO21-1 MULTI-CHANNEL INTERCHANGE TEST

PAGE 20

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
1720		BCE	NOWT3,TAD4,1		12	05232 B 05364 01004 1
1721	ERR3	B	TYP1		7	05244 J 01087
1722	MSG31	DCW	ADDINT BR CLAP,3 @.6		16	05251
1723		BCE	*68,TAD2,1		12	05268 B 05287 01002 1
1724		B	*62		7	05280 J 05288
1725	HALT31	H	HALT		1	05287 *
1726		B	STWM3		7	05288 J 05358
1727	AVAIL3	BCE	MSG32-7,TAD4,1		12	05295 B 05314 01004 1
1728		B	STWM3		7	05307 J 05358
1729		B	TYP1		7	05314 J 01087
1730	MSG32	DCW	ABRANCHED OLAP,3 @.6		16	05321
1731		BCE	*68,TAD2,1		12	05338 B 05357 01002 1
1732		B	*62		7	05350 J 05358
1733	HALT32	H	HALT		1	05357 *
1734	STWM3	CW	OLAP63		6	05358 H 08303
1735	NOWT3	NOP			1	05364 N
1736		DC	@JA		1	05365
1737		DC	NOWT3		5	05370 05364
1738		DC	3		1	05372
1739		DCW	@3@		1	05377 05386
1740		DC	BLW		1	05378
1741		DC	@MA		7	05379 J 05550
1742		DC	NOER3		12	05386 V 05717 016X6 1
1743	BLW	BW	CH4W-1,CH3EX1		12	05398 D 05662 05336 3
1744		MLCS	WRITE3C3,MSG32E15		12	05410 D 05335 07075 \$
1745		MRCG	MSG32E14,MSGERE14		12	05422 D 05660 01692 3
1746		MLCS	WRITE3C1,CHCODE		12	05434 D 08920 01693 3
1747		MLCS	@3@,CHSTAT		12	05446 D 05662 01708 3
1748		MLCS	WRITE3C3,ICNO		12	05458 D 01172 07176 /
1749		MLNA	C3,DRFINW\$		12	05470 D 08342 07234 /
1750		MLNA	T31,ADDTE10		12	05482 D 08347 07281 /
1751		MLNA	T32,ADDPC10		12	05494 D 01172 07369 /
1752		MLNA	C3,DRNGE\$		12	05506 D 08920 07394 3
1753		MLCS	@3@,PMMMSG617		7	05518 J 06907
1754		B	ERROUT		6	05525 * 05710
1755		SW	SW35		12	05531 V 05550 018X2 1
1756		BW	NOER3,CH3-4EX1		7	05543 J 05659
1757		B	WRITE3			

T021-1 MULTI-CHANNEL INTERCHANGE TEST

PAGE / 21

PGLIN	LABEL	OPCOD	OPERAND	CT	ADDRS	INSTRUCTION
1758	NOER3	B	RESET	7	05550	J 08251
1759	IDW3X	CW	SWF361	6	05557	D 05151
1760		NOP		1	05563	N
1761	IDW3	B	NOIDW3	7	05564	J 05595
		MLCS	CH3EX1.PATRN1	12	05571	0 018X6 09001 3
1762		MLCS	@32.PATRN	12	05583	D 08920 09000 3
1763		MLCS	CH3EX1.WRITE363	12	05595	D 018X6 05662 3
1764	NOIDW3	MLCS	PS33.CH3EX1.	12	05607	B 05131 018X6
		BCE	CH4W-1.CH3EX1	12	05619	V 05717 018X6 1
1765		BW	NTPW3	6	05631	D 07793
1766		CW		1	05637	N
1767		NOP		1	05638	
1768	SCLOP3	DCW	@J@	5	05643	05638
1769		DC	SCLOP3	1	05644	
1770		DC		1	05645	
1771		DC	3	5	05650	05652
1772		DCW	@3@	1	05651	
1773		DC	INQW3	7	05652	J 01011 Q
1774		DC	G	4	05659	
1775	INQW3	BNQ	ITR	5	05667	09**#0
1776	WRITE3	DCW	@MP81@	1	05668	
1777		DC	PATRNEX5	1	05669	N
1778		DC	@WA@	1	05670	
1779		NOPWM		5	05675	05691
1780	CLAP3	DCW	@J@	1	05676	
1781		DC	MOL3	5	05677	
1782		DC	3	5	05682	05659
1783		DCW	@3@	1	05683	
1784		DC	WRITE3	7	05684	J 05697
1785		DC	2	6	05691	* 08303
1786		B	*E7	12	05697	B 05637 01001 1
1787	MOL3	SW	OLAPE3	1	05707	N
1788		BCE	SCLOP3-1.TAD1.1	7	05710	J 05364
1789		NOPWM		1	05717	N
1790	SW35	B	NOT3	7	05718	J 05732
1791		NOPWM		6	05691	
1792	CH4W	B	*E8	1	05717	
1793			*****	7	05717	
1794			*****	7	05717	
1795			*****	7	05717	

T021-1 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 22

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
1796		B SWF4	BR- TAPES ON CH4	7	05725	J 05751
1797	PS44	CW ZERO&4	TO SKIP OLAP TEST	6	05732	□ 01227
1798		SW SWF4&1	LOOK FOR MORE DRIVES	6	05738	• 05752
1799		B MORDR		7	05744	J 06318
1800	SWF4	NOPWM		1	05751	N
1801		B 1DW4X	BR IF NO READ	7	05752	J 06158
1802		***** CHECK OVERLAP *****		12	05759	V 05959 019/0 1
1803		BW STMH4.CH4-4&X1	DRV OUT OF TEST IF WM	1	05771	
1804		DCW a1a	BR ANY	5	05776	05965
1805		DC NOWT4	BUT	1	05777	
1806		DC a..a	DATA CHK	12	05778	D 06263 05867 3
1807		MLCS WRITE4&3.MSG41&15	MOVE DR NO	12	05790	D 06263 05937 3
1808		MLCS WRITE4&3.MSG42&15	TO MSG	12	05802	V 05896 08304 1
1809		BW AVAIL4.OLAP&4	BR IF OVERLAPED	12	05814	B 05833 01263 1
1810		BCE *E8.SYS1&7..1	BR IF OLAP AVAIL	7	05826	J 05973
1811		B NOWT4&8	BR IF NO OLAP AVAIL	12	05833	B 05965 01004 1
1812		BCE NOWT4.TAD4..1	BR IF NOT USING OLAP	7	05845	J 01087
1813	ERR4	B TYP1	TYPE ROUT	16	05852	
1814	MSG41	DCW ADD1DNT BR OLAP..4 a..G		12	05869	B 05888 01002 1
1815		BCE *E8.TAD2..1	HALT TAD	7	05881	J 05889
1816		B *E2	AROUND HALT	1	05888	*
1817	HALT41	H	HALT	7	05889	J 05959
1818		B STMH4	BR OUT OF ROUTINE	12	05896	B 05915 01004 1
1819	AVAIL4	BCE MSG42-7.TAD4..1	BR IF NOT USING OLAP	7	05908	J 05959
1820		B STMH4	BR IF USING OLAP	7	05915	J 01087
1821		B TYP1		16	05922	
1822	MSG42	DCW ABRANCHED OLAP..4 a..G		12	05939	B 05958 01002 1
1823		BCE *E8.TAD2..1	HALT TAD	7	05951	J 05959
1824		B *E2	ARND HALT	1	05958	*
1825	HALT42	H	HALT	6	05959	□ 08304
1826		STMH4 CW OLAP&4		1	05965	N
1827		NOWT4 NOP		1	05966	
1828		DC aJ2	LOOP IF OVERLAP ON	5	05971	05965
1829		DC NOWT4		1	05972	
1830		DC 4		1	05973	
1831		DC a1a	BRANCH ANY	5	05978	05987
1832		DC B2W aM&4	ERRORS	1	05979	
1833		DC				

T021-1 MULTI-CHANNEL INTERCHANGE TEST

PGLIN	LABEL	OPCODE	OPERAND	CT	ADRS	INSTRUCTION
1834		B	NOERR4	7	05980	J 06151
1835	B2W	BW	MORDRW,CH4&X1	12	05987	V 06318 019/4 1
1836		MLCS	WRITE4&3,MSG42615	12	05999	D 06253 05937 3
1837		MRCG	MSG42614,MSGERC14	12	06011	D 05936 07075 4
1838		MLCS	WRITE4&1,CHCODE	12	06023	D 06261 01692 3
1839		MLCS	SET UP	12	06035	D 08917 01693 3
1840		MLCS	CH ALTER	12	06047	D 06263 01708 3
1841		MLNA	ROUTINE	12	06059	D 01177 01176 /
1842		MLNA	ROUTINE	12	06071	D 08352 07234 /
1843		MLNA	ADDRESSES	12	06083	D 08357 07281 /
1844		MLNA	ADDRESSES	12	06095	D 01177 07369 /
1845		MLCS	C4,DRFIN65	12	06107	D 08921 07394 3
1846		B	ERROUT	7	06119	J 06907
1847		SW	SW45	6	06126	• 06311
1848		BW	NOERR4,CH4-&X1	12	06132	V 06151 019/0 1
1849		B	WRITE4	7	06144	J 06260
1850	NOERR4	8	WRITE REC AGAIN	7	06151	J 08251
1851	IDW4X	CW	RESET	6	06158	□ 05752
1852		NOP	SWF4&1	1	06164	N
1853	IDW4	8	ZERO ERROR COUNTERS	7	06165	J 06196
1854		MLCS	CLEAR SWITCH	12	06172	D 019/4 09001 3
1855		MLCS	SWF4&1	12	06184	D 08921 09000 3
1856	NOIDW4	MLCS	MOVE DR NO	12	06196	D 019/4 06263 3
1857		BCE	CH4&1,WRITE4&3	12	06208	B 05732 019/4
1858		BW	PS44,CH4&X1,	12	06220	V 06318 019/4 1
1859		CW	MORDRW,CH4&X1	6	06232	□ 07977
1860		NOP	NTPW4	1	06238	N
1861	SCLOP4	DCW	NOIDW4	1	06239	
1862		DC	CH4&1,PATRN1	5	06244	06239
1863		DC	MOVE CH E DR NO	1	06245	
1864		DCW	TO FIRST REC	1	06246	
1865		DC	MOVE DR NO	5	06251	06253
1866		DC	CHANNEL FINISHED	1	06252	
1867	INQW4	BNQ	BR- DR OUT OF TEST	7	06253	J 01011 Q
1868	WRITE4	DCW	ERROR SUMMARY CH 3	4	06260	
1869		DC	SWITCH	5	06268	09***0
1870		DC	WAIT	1	06269	
1871		NOPWM	IF SCOPE	1	06270	N

T021 INSTRUCTION
CT ADDRS
OPCODE OPERAND

PGM/N	LABEL	OPCODE	OPERAND	BRANCH	CT	ADDRS	INSTRUCTION
1872	OLAP4	DCW	2J2	OLAP	1	06271	
1873		DC	MOL4		5	06276	06292
1874		DC	4		1	06277	
1875		DCW	212	BRANCH	1	06278	
1876		DC	WRITE4	BUSY	5	06283	06260
1877		DC	2		1	06284	
1878		B	*E7		7	06285	J 06298
1879	MOL4	SW	OLAP4	MARK OLAPED	6	06292	* 08304
1880		BCE	SCLDOP4-1,TAD1,1	SCOPE LOOP	12	06298	B 06238 01001 1
1881		NOPNM		RE-READ	1	06310	N
1882	SW45	B	NOW14	SWITCH	7	06311	J 05965
1883	*	*	*	LOOK FOR MORE DRIVES	*	*	*
1884	*	*	*	*	*	*	*
1885	*	*	*	*	*	*	*
1886	*	*	*	*	*	*	*
1887	MORDRW	BW	UPDATE.ZERO&4.1	BRANCH IF ALL DRIVES	12	06318	V 03903 01227 1
1888		BW	UPDATE	NOT FINISHED	6	06330	V 03903
1889		BW	UPDATE	ON THIS CH	6	06336	V 03903
1890		BW	UPDATE		6	06342	V 03903
1891	*	*	*	ROUTINE TO UPDATE WRITE RECORDS	*	*	*
1892	*	*	*	*	*	*	*
1893	*	*	*	*	*	*	*
1894		NOP			1	06348	N
1895	FRECH	MLCA	29503.X5	INITIALIZE X5	12	06349	D 08924 00049 T
1896		SW	IDW1-IDW2	BR AROUND MOVES FOR	11	06361	* 04362 04963
1897		SW	IDW3-IDW4	DR & CH IDENT	11	06372	* 05564 06165
1898		A	212,ZRE		11	06383	A 08917 09958
1899		A	212,IMPNT		11	06394	A 08917 01220
1900	MLCB	ADC2,PATRN1	MOV CHARS- REPLAC ID		12	06405	D 08926 09001 L
1901	CW	PATRN2,FRECH	CLEAR IDENT. REC		11	06417	# 09002 06349
1902	C	TMPCNT,ONE01	SEE IF 100 TH. PASS		11	06428	C 01220 01010
1903	BE	*E8	BR ON LO1ST PASS		7	06439	J 06453 S
1904	B	WROUT	WRITE NEXT REC		7	06446	J 03879
1905	S	TMPCNT	ZERO TMP COUNTER		6	06453	S 01220
1906	A	STPLNC,WKARS	STEP INCREMENT		11	06459	A 08305 08317
1907	S	WKARS,X5	TOTAL ADRS STEP		11	06470	S 08317 00049
1908	A	212,PRMCNT	NO OF REC STEPS		11	06481	A 08917 08309
1909	C	PRMCNT,2206	COMP RECORD COUNT		11	06492	C 08309 08928

T021-1 MULTI-CHANNEL INTERCHANGE TEST

PAGE 25

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
1910		BE	FINUPW			BR- ALL RECS WRITTEN
1911		B	WROUT			WRITE NXT REC
1912	*	*****	*****			*****
1913	*	*****	WRITE TAPE MARKS & REWIND ALL DRIVES			*****
1914	*	*****	*****			*****
1915	FINUPW	CW	SWT1,SWT2	INITIALIZE	11	06517 □ 06558 06584
1916		CW	SWT3,SWT4	ROUTINE	11	06528 □ 06635 06686
1917		S	ZRE		6	06539 S 09958
1918		SW	X14-4		6	06545 * 00090
1919		S	X14	CLEAR X14	6	06551 S 00094
1920		NOPWM			1	06557 N
1921	SWT1	B	SWT2-1	BR CH 2	7	06558 J 06583
1922		SW	SWT1	SWITCH ARND CH 1	6	06565 * 06558
1923		BCE	SWTM,SYSTC12,1	BR IF CH 1	12	06571 B 06729 01268 1
1924		NOPWM			1	06583 N
1925	SWT2	B	SWT3-1	BR CH 3	7	06584 J 06634
1926		SW	SWT2	SWITCH ARND CH 2	6	06591 * 06584
1927		BCE	*68,SYSTC13,1	BR IF CH 2	12	06597 B 06616 01269 1
1928		B	SWT3-1		7	06609 J 06634
1929		ZA	E1,X14	STEP CH CODE	11	06616 M 08863 00094
1930		B	SWTM	BR TO TAPE INST	7	06627 J 06729
1931		NOPWM			1	06634 N
1932	SWT3	B	SWT4-1	BR CH 4	7	06635 J 06685
1933		SW	SWT3	SWITCH ARND CH3	6	06642 * 06635
1934		BCE	*68,SYSTC14,1	BR IF CH 3	12	06648 B 06667 01270 1
1935		B	SWT4-1	BR CH 4	7	06660 J 06685
1936		ZA	E2,X14	STEP CH CODE	11	06667 M 08929 00094
1937		B	SWTM	BR TO TAPE INST	7	06678 J 06729
1938		NOPWM			1	06685 N
1939	SWT4	B	SUMW	BR ERROR SUMMARY	7	06686 J 07424
1940		SW	SWT4	SWITCH OUT OF ROUT	6	06693 * 06686
1941		BCE	*68,SYSTC15,1	BR IF CH 4	12	06699 B 06718 01271 1
1942		B	SUMW	BR ERROR SUMMARY	7	06711 J 07424
1943		ZA	E3,X14	STEP CH CODE	11	06718 M 08930 00094
1944	SWTM	MLCS	@06,WTM2E3	ZERO	12	06729 D 08884 06860 3
1945		MLCS	@02,RWD2E3	DR NO	12	06741 D 08884 06872 3
1946		MLCS	CHOPX14,WTM2E1	CHANNEL	12	06753 D 09100 06858 3
1947		MLCS	CHCPX14,RWD2E1	CODE	12	06765 D 09100 06870 3

T021-1 MULTI-CHANNEL INTERCHANGE TEST

1021 INSTRUCTION

26

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
1948		MLCS	TANBEX14.BAW2	12	06777	D 09108 06862 3
1949		MLCS	TANBEX14.BAW3	12	06789	D 09103 06881 3
1950		MLCS	TANBEX14.BCBW	12	06801	D 09108 06874 3
1951	STEP4	SW	WTM2E3.RWD2E3	STEP	11	06813 *
1952		A	E1.RWD2E3	DR NO	11	06824 A 08863 06872
1953		A	E1.WTM2E3	IN CONTROL	11	06835 A 08863 06860
1954		CW	WTM2E3.RWD2E3	INSTRUCTIONS	11	06846 □ 06860 06872
1955	WTM2	WIM	11	WRITE TAPE MARKS	5	06857 U ZUI M 6
1956	BAW2	BAI	*E1	RESET INTERLOCK	7	06862 R 06869 M
1957	RWD2	RWD	11	REWIND DRIVES	5	06869 U ZUI R
1958	BCBW	BCB1	*--11		7	06874 R 06869 2
1959	BAW3	BAI	*E1		7	06881 R 06888 M
1960	BCE	SWT1-1,RWD2E3,9	BR IF DR NO 9		12	06888 R 06557 06872 9
1961		B	STEP4	BR NEXT DR	7	06900 J 06813
1962	*	*	*	*	*	*
1963	*	*	*	WRITE ERROR ROUTINE	*	*
1964	*	*	*	*	*	*
1965	ERROUT	SBR	RETW65	STORE BAR	7	06907 G 07252 B
1966		SEB	REFW2E5		7	06914 G 07199 B
1967		B	CHSTT	BR CH ALTER ROUTINE	7	06921 J 01290
1968		MLCA	INDIC.MSGER610	RESET ERROR MSG	12	06928 D 08993 07071 T
1969		BNR1	*E13		7	06940 R 06959 1
1970		MLCS	②.MSGER66		12	06947 D 08931 07067 3
1971		BER1	*E13		7	06959 R 06978 4
1972		MLCS	②.MSGER67		12	06966 D 08931 07068 3
1973		BEF1	*E13		7	06978 R 06997 8
1974		MLCS	②.MSGER68		12	06985 D 08931 07069 3
1975		BNT1	*E13		7	06997 R 07016 B
1976		MLCS	②.MSGER69		12	07004 D 08931 07070 3
1977		BWL1	*E13		7	07016 R 07035 -
1978		MLCS	②.MSGER610		12	07023 D 08931 07071 3
1979		BEX1	*E13..	TYPE ON INDC 1288A	7	07035 R 07054 *
1980		BCE	WORR,TADO,1	TIMEOUT TAD	12	07042 B 07078 01000 1
1981		B	TYP1	TYPE ROUTINE	7	07054 J 01087
1982	MSGER	DCH	①INDC. 148AB JD .G		16	07061
1983	WORR	BCE	*E8.TAD2,1	BR IF HALT ON ERROR	12	07078 B 07097 01002 1
1984		B	*E2	AROUND HALT	7	07090 J 07098

644
PAGE 26

T021-1 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 27

PGLIN	LABEL	OPCOD	OPERAND	CT	ADDRS	INSTRUCTION
1985	H		HALT	1	07097	.
1986	*	*****				
1987	*	*****	WRITE ERROR PORTION	*		
1988	*	*****				
1989	WERRT	BCE	DRFINH,MSGER6,1	BR- NOT READY	12	07098 B 07171 07067 1
1990		BCE	NFOILW,MSGER7,4	- DATA CHECK	12	07110 B 07201 07068 4
1991		BCE	RWDNR,MSGER8,8	- FOIL STRIP	12	07122 B 07152 07069 8
1992		BCE	DRFINH,MSGER10,8	- W.L.R.	12	07134 B 07171 07071 8
1993		H	DRFINW6	HALT ON INDC. 2 OR A	6	07146 * 07177
1994	RWDNR	RWD	11	REWIND	5	07152 U ZUI R
1995		BCB1	*-11	BR BUSY	7	07157 R 07152 2
1996		BA1	*61		7	07164 R 07171 H
1997	DRFINN	SW	0000006X1	MARK DRIVE OUT	6	07171 * 00040
1998		SW	X6-4	STEP RETN ADDRESS	6	07177 * 00050
1999		ZA	062,X6		11	07183 M 08932 00054
2000	RETW2	B	0EX6		7	07194 J 0040
2001	NFOILW	A	E1,2ZZ	ADD 1 TO TMP COUNT	11	07201 A 08863 01228
2002		BCE	SKPW,ZZZ,2	BR IF 2 CONSEC ERRORS	12	07212 B 07254 01228 2
2003	ADDT	A	E1,000000EX1	ADD 1 TO TMP COUNT	11	07224 A 08863 00040
2004		BSP	11	BACKSPACE ONE REC	5	07235 U ZUI B
2005		BA1	*-11		7	07240 R 07235 H
2006	RETW	B	0	RETURN	7	07247 J 00000
2007	SKPW	S	ZZZ	CLEAR COUNTER	6	07254 S 01228
2008		A	81,YYY	SKIP COUNTER	11	07260 A 08863 01229
2009	ADDP	A	E1,000000EX1	ADD 1 TO SKIP COUNT	11	07271 A 08863 00040
2010		MLCS	ADCE10,SUBTRMG10	MOVE TEMP ADRS LOC	12	07282 D 07234 07308 3
2011	MLCS				1	07294 D
2012	MLCS				1	07295 D
2013	MLCS				1	07296 D
2014	MLCS				1	07297 D
2015	SUBTRW	S	012,00000	SUB PERM CNT FROM TEMP	11	07298 S 08917 00000
2016		BSP	11	BACKSPACE	5	07309 U ZUI B
2017		BA1	*-11		7	07314 R 07309 H
2018	SKIPI	SKP	11	SKIPI	5	07321 U ZUI E
2019		BA1	*-11		7	07326 R 07321 H
2020		BCE	PERR,YYY,7	BR IF 7 CONSEC SKPS	12	07333 B 07352 01229 7
2021		B	REIW	RETURN	7	07345 J 07247

T021-1 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 28

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
2022	PERR	MLCS	SKIP1C3.PMMMSGE18	MOVE DR NO TO MSG	12	07352 D 07324 07395 3
2023	DRNG	SW	00000EX1	MARK DR OUT OF TEST	6	07364 * 000*0
2024		B	TYP1		7	07370 J 01087
2025	PMMMSG	DCW	@PERM WRITE ERROR	.G	19	07377
2026		BCE	*68.TAD2.1		12	07397 B 07416 01002 1
2027		B	*62	AROUND HALT	7	07409 J 07417
2028		H		HALT	1	07416 *
2029		B	RETW		7	07417 J 07247
2030	*	*	*	*****		
2031	*	*	*	TYPE ERROR SUMMARY		
2032	*	*	*	*****		
2033	SUMW	NOP	BR IF NO		1	07424 N
2034	NTPW1	B	NTPW2-1	CH 1 TAPES	7	07425 J 07608
2035		B	TYP1	TYPE ROUTINE	7	07432 J 01087
2036	WER1	DCW	@TDS CH 1a.G		8	07439
2037		B	TYP1	TYPE ROUTINE	7	07448 J 01087
2038	NO1	DA	1X37.G		07455	
2039			1.1			
2040		B	TYP1	TYPE ROUTINE	7	07493 J 01087
2041		DCW	@TEMPa.G		4	07503
2042		B	TYP1	TYPE ROUTINE	7	07505 J 01087
2043	TO111	DA	1X37.G		07512	
2044			1.1			
2045		B	TYP1	TYPE ROUTINE	7	07550 J 01087
2046		DCW	ASKIPSA.G		5	07561
2047		B	TYP1	TYPE ROUTINE	7	07563 J 01087
2048	TO112	DA	1X37.G		07570	
2049			1.1			
2050		NOP	BR IF NO		1	07608 N
2051	NTPW2	B	NTPW3-1	CH 2 TAPES	7	07609 J 07792
2052		B	TYP1	TYPE ROUTINE	7	07616 J 01087
2053	WER2	DCW	@TDS CH 2a.G		8	07623
2054		B	TYP1	TYPE ROUTINE	7	07632 J 01087
2055	NO2	DA	1X37.G		07639	
2056			1.1			
2057		B	TYP1	TYPE ROUTINE	7	07677 J 01087
2058		DCW	@TEMPa.G		4	07687
2059		B	TYP1	TYPE ROUTINE	7	07689 J 01087

T021-1 MULTI-CHANNEL INTERCHANGE TEST

047

PAGE 29

PGLIN	LABEL	OPCOD	OPERAND	CT	ADDR	INSTRUCTION
2060	T0T21	DA	1X37.G		07696	
2061			1.1		07696	
2062		B	TYPI		07734	J 01087
2063		DCW	@SKIPSA.G		5	07745
2064		B	TYPI		7	07747 J 01087
2065	T0T22	DA	1X37.G		07754	
2066			1.1		07754	
2067		NOP			1	07792 N
2068	NTPW3	B	NTPW4-1		7	07793 J 07976
2069		B	TYPI		7	07800 J 01087
2070	WER3	DCW	@TDS CH 3a.G		8	07807
2071		B	TYPI		7	07816 J 01087
2072	NO3	DA	1X37.G		07823	
2073			1.1		07823	
2074		B	TYPI		7	07861 J 01087
2075		DCW	@TEMPA.G		4	07871
2076		B	TYPI		7	07873 J 01087
2077	T0T31	DA	1X37.G		07880	
2078			1.1		07880	
2079		B	TYPI		7	07918 J 01087
2080		DCW	@SKIPSA.G		5	07929
2081		B	TYPI		7	07931 J 01087
2082	T0T32	DA	1X37.G		07938	
2083			1.1		07938	
2084		NOP			1	07976 N
2085	NTPW4	B	NDSUMW		7	07977 J 08160
2086		B	TYPI		7	07984 J 01087
2087	WER4	DCW	@TDS CH 4a.G		8	07991
2088		B	TYPI		7	08000 J 01087
2089	NO4	DA	1X37.G		08007	
2090			1.1		08007	
2091		B	TYPI		7	08045 J 01087
2092		DCW	@TEMPA.G		4	08055
2093		B	TYPI		7	08057 J 01087
2094	T0T41	DA	1X37.G		8	08064
2095			1.1		8	08064
2096		B	TYPI		7	08102 J 01087

T021-1 MULTI-CHANNEL INTERCHANGE TEST

PAGE 30

T021 INSTRUCTION

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS
2097		DCW	ASKIPSA.G	5	08113
2098		B	TYP1	7	08115 J 01087
2099	TOT42	DA	1X37.G	08122	
2100		1.1		08122	
21C1	NDSUMW	CW	PATRNE954	6	08160 □ 09954
2102		CW	CLEAR WORD MARKS	1	08166 □
21C3		CW	FROM PATTERN	1	08167 □
2104		CW		1	08168 □
2105		CW		1	08169 □
2106		BCE	START.TAD3.1	12	08170 B 02000 01003 1
2107		MRCWG	CH1.10	12	08182 D 0180C 00010 0
21C8		MRCWG	TAC0.170	12	08194 D 01000 00170 L
21C9		B	TYP1	7	08206 J 01087
2110		DCW	AEND WR PASSA.G	11	08223
2111		B	LOADER	7	08225 J 00400
2112	ZZZ1	BCE	699.422.%	12	08232 B 00699 00422 %
2113		B	START	7	08244 J 02000
2114	*	*	***** RESET ERROR ROUTINE IF NO ERRORS *****		
2115	*	*			
2116	*	*			
2117	RESET	SBR	RETNES	7	08251 G 08297 B
2118		S	YYY	6	08258 S 01229
2119		S	ZZZ	6	08264 S 01228
2120		CW	SW25.SW45	11	08270 □ 05109 06311
2121		CW	SW15.SW35	11	08281 □ 04508 05710
2122	RETN	B	0	7	08292 J 00000
2123		H		1	08299 *
2124	*	*	***** WRITE CONSTANTS *****		
2125	*	*			
2126	OLAP	DC	300000a	5	08300
2127	SYPIINC		052	1	08305
2128	PRMCNT	DCW	0000	4	08309
2129	CNTW	DCW	00	2	08311
2130	SIPTCL		0100a	3	08314
2131	WKARS		0000a	3	08317
2132	T11		T0111-4	5	08322 07508
2133	T12		T0112-4	5	08327 07566
2134	T21		ADDRESSES	5	08332 07692

T021-1 MULTI-CHANNEL INTERCHANGE TEST

047
PAGE 31

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION	
2135	T22		T0122-4	5	08337	07750	
2136	T31		T0131-4	5	08342	07876	
2137	T32		T0132-4	5	08347	07934	
2138	T41		T0141-4	5	08352	08060	
2139	T42		T0142-4	5	08357	08118	
2140	TOTALS	DCW	a a	2	08358		
2141			a a	4	08363		
2142			a a	4	08367		
2143			a a	4	08371		
2144			a a	4	08375		
2145			a a	4	08379		
2146			a a	4	08383		
2147			a a	4	08387		
2148			a a	4	08391		
2149			a a	3	08394		
2150	*			7	08396	G 08546 8	
2151	MRCW	SBR	MRCWXES	6	08403	■ 02043	
2152		CW	MRSW	12	08409	D 08556 01271 T	
2153		MLCA	ONXXXX,SYSS1C15	MOVE 4 ONES			
2154		BCE	FT,CHN1E2,1	TAPE ON CHN 1	12	08421	B 08445 01291 1
2155		MLCS	ON-1,SYSS1E12	MOVE A BLANK	12	08433	D 08551 01268 3
2156	FT	BCE	GT,CHN2E2,1	TAPE ON CHN 2	12	08445	B 08469 01348 1
2157		MLCS	ON-1,SYSS1E13	MOVE A BLANK	12	08457	D 08551 01269 3
2158	GT	BCE	HT,CHN3E2,1	TAPE ON CHN 3	12	08469	B 08493 01405 1
2159		MLCS	ON-1,SYSS1E14	MOVE A BLANK	12	08481	D 08551 01270 3
2160	HT	BCE	IT,CHN4E2,1	TAPE ON CHN 4	12	08493	B 08517 01462 1
2161		MLCS	ON-1,SYSS1E15	MOVE A BLANK	12	08505	D 08551 01271 3
2162	IT	MRCWG	CALT,01290		12	08517	D 08557 01290 L
2163		MLCWS	DOP,OLINSELL		12	08529	D 08850 01582 7
2164	MRCWX	6	0	7	08541	J 00000	
2165		DCW	a a	4	08551		
2166	ON	DCW	a1a	1	08552		
2167	CNXXX	DCW	a1111a	4	08556		
2168	CALT	SBR	CHSTR5	7	08557	G 01675 B	
2169		MLNA	STARAD,SCANCIO	12	08564	D 01681 01342 /	
2170		SW	X11-4	6	08576	• 00075	
2171		S	X11	6	08582	S 00079	
2172		A	ONES,X11	11	08588	A 01709 00079	

BLANKS FOR ERROR TABLE

T021-1 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 32

C50 INSTRUCTION

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDR	INSTRUCTION
2173		SCNLB	9999.0	12	08599	D 09999 00000 -
2174		SBR	ADDHLD	7	08611	G 01691 B
2175	A	ONES,ADDHLD		11	08618	A 01709 01691
2176	C	ADDHLD,STOPAD		11	08629	C 01691 01686
2177	BE	CHSTR		7	08640	J 01670 S
2178	MLNA	ADDHLD,MLC65		12	08647	D 01691 01397 /
2179	MLCS	0.BCHE11		12	08659	D 00000 01415 3
2180	BCE	CHINS,K1.7		12	08671	B 01463 01703 7
2181	BCE			1	08683	B
2182	BCE			1	08684	B
2183	BCE	STINS		6	08685	B 01540
2184	BCE			1	08692	B
2185	BCE			1	08693	B
2186	BCE			6	08694	B 01571
2187	BCF	OLINS		11	08700	S 01709 01691
2188	S	ONES,ADDHLD		12	08711	D 01691 01342 /
2189	MLNA	ADDHLD,SCANC10		7	08723	J 01332
2190	B	SCAN		12	08730	D 01691 01485 /
2191	MLNA	ADDHLD,MLCX610		12	08742	D 01692 00.M0 3
2192	MLCS	CHCODE,06X11		11	08754	A 01711 01691
2193	A	THREES,ADDHLD		12	08765	D 01691 01520 /
2194	MLNA	ADDHLD,CTDC610		12	08777	D 01708 00000 3
2195	MLCS	TDN0.0		11	08789	S 01711 01691
2196	S	THREES,ADDHLD		7	08800	J 01433
2197	B	UPCAT		12	08807	D 01691 01562 /
2198	MLNA	ADDHLD,MLCX610		12	08819	D 01693 00000 3
2199	MLCS	CHSTAT,0		7	08831	J 01433
2200	B	UPCAT		11	08838	A 01695 01691
2201	A	SIX,ADDHLD		1	08849	
2202	DCW	0MA		1	08850	
2203	DOP	DCW	ADA	1	08851	
2204		LTORG	*	1	08851	
2204			#22	1	08852	a*3
2204			#3	1	08853	a#3
2204			#3	1	08854	a#3
2204			a	2	08856	

T021-1 MULTI-CHANNEL INTERCHANGE TEST

051 PAGE 33

PGLIN LABEL OP COD OPERAND

CT ADDRS INSTRUCTION

2204		2204	08857
2204		2204	08858
2204		2204	08859
2204		2204	08860
2204		aUNA	
2204		E1	2 08862
2204		CH1	1 08863
2204		CH2	5 08868 01800
2204		CH3	5 08873 01838
2204		CH4	5 08878 01876
2204		304	5 08883 01914
2204		64	1 08884
2204		aBA	1 08885
2204		aODDA	1 08886
2204		aUJ	4 08890
2204		aEVENA	1 08891
2204		aMCVEA	4 08895
2204		aLJ	1 08896
2204		aLCADA	4 08900
2204		PERR	5 08905
2204		ERROUT	5 08910 07352
2204		aRA	5 08915 06907
2204		aI4	1 08917
2204		aXJ	1 08918
2204		a2J	1 08919
2204		a3J	1 08920
2204		a4J	1 08921
2204		a950J	3 08924
2204		aDCJ	2 08926
2204		a20J	2 08928
2204		E2	1 08929
2204		E3	1 08930
2204		a a	1 08931
2204		a6J	1 08932
2205	***** READ CONSTANTS *****		
2206	ORG 8960		08960
2207	DC a#		1 08960

T021-1 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 34

OPCODE OPERAND

CT ADDRS INSTRUCTION

PGIN	LABEL	RD1	DCW	RAREA1E954	ADDRESSES	5	08965	07954
2208	RD2			RAREA2E954	FOR	5	08970	08954
2209	RD3			RAREA3E954	RECORD	5	08975	16954
2210	RD4			RAREA4E954	CHANGE	5	08980	17954
2211	XXX			002		1	08981	
2212	VVV			00002		3	08984	
2213	WWW			00022		2	08986	
2214	WKARID	DCW		00022	RECORD ID WORK AREA	2	08988	
2215	INDIC			0148ABA,G	TO RESET ERROR NSG	5	08993	
2216		ORG		9000			09000	
2217								
2218	*				*****			
2219	*				RECORD PATTERN			
2220	*				*****			
2221	*				RECORD LENGTHS INCREASED FROM RIGHT TO LEFT			
2222	PATRN	DCW	a,a,G		DRIVE IDENTIFICATION	2	09000	
2223		DC		AEFGHIJKLMNOPQRSTUVWXYZ.	* * *	28	09030	
2224				G	Q	28	09058	
2225				R,D	GS	28	09086	
2226				0.BTMES\$*B,L-/.*XMSHY#o.	TMABCDA	28	09114	
2227				G	SG	28	09142	
2228				0ORHAO*B/V,T-MZPMTQ,JFKTS,GBM	RANDOM	28	09170	
2229				G	S	28	09198	
2230				0.S@THUSVYMX#YZZ.0FHEADCHMA	CHARS	28	09226	
2231				L,L,G,R,D	ALL	28	09254	
2232				0.H@1B,0NBO,PLO-R,*@		28	09282	
2233		DC		GGGGGLGGGLGGGG	GGGG	36	09310	
2234				AMMMMMTMMMPMBMMMM	GGMM	36	09348	
2235				G	GG	36	09384	
2236				G	GG	36	09420	
2237				AMSSSSSSSSSSGDDDDG	GG	36	09456	
2238				AMMMMMMMMMMMMM	GGGG	36	09492	
2239				AMMMMMMMMMMMMM	GGGG	36	09528	
2240				AMSSSSSSSSGDDDDG	GG	36	09564	
2241				AMMMMMMMMMMMMM	GGGG	36	09600	
2242				AMSSSSSSGDDDDG	GGGG	36	09636	
2243				AMMMMMMMMMMMMM	GGGG	36	09672	
2244				AMSSSSSSSSGDDDDG	GGGG			

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
22245		DC	0XX0	2	09674	
22246			0RSNOV.0RSNOV.0IK49SM81K49SM8A TSLL.DSGLL.DSGLL	28	09702	
22247			AICPPMT0ICPMNT0B.GLMNTB.GLMNTA 0J37T3H6J37T3H6AL7M.0HAL7M.0HA	28	09730	
22248			01 1 1 1 1 1 J250UQ J250UQ 0 01248Y- 12486- 136@Y6-136@Y6-0	28	09758	
22249			0RSNOV.0RSNOV.0IK49SM81K49SM8A TSLL.DSGLL.DSGLL	28	09786	
22250			AICPPMT0ICPMNT0B.GLMNTB.GLMNTA 0J37T3H6J37T3H6AL7M.0HAL7M.0HA RECS	28	09814	
22251			01 1 1 1 1 1 J250UQ J250UQ 0 SHORT	28	09842	
22252			01248Y- 12486- 136@Y6-136@Y6-0	28	09870	
22253			0000000.G	28	09898	
22254			01 1 1 1 1 1 J250UQ J250UQ 0 SHORT	28	09926	
22255			01248Y- 12486- 136@Y6-136@Y6-0	28	09954	
22256	ZRE	DCW	0000000.G	4	09958	
22257	*					
22258	*		RECORD LENGTHS INCREASED FROM RIGHT TO LEFT			
22259	*		1 ST. 100 RECORDS ARE- 6@Y6- 2 ND. 100 RECORDS ARE- Y0-136@Y6-			
22260	*					
22261	CHOP	ORG	9960	09960		
22262	CHOP	DCW	0Z0M.0*\$.#0	09960		
22263	TANB		0RX31RX31A	09968		
22264	BLK	DCW	0 0 BLANKS	09976		
22265			00000 0 FOR ERROR	09988		
22266			00000 0 TABLE	09993		
22267			00000 0.G	09997		
22268	*		*****			
22269		LTORG	*	09999		
22270		EX	ZZZ1	J08232		
22271		ORG	2000	02000		

T021-2 MULTI-CHANNEL INTERCHANGE TEST

CT ADDRS INSTRUCTION

PAGE 36

PGLIN LABEL OPCODE OPERAND

2273		ORG 1000		01000
2274	*			
2275	*	S TANDARD TADS		
2276	*		-- NOT 1 --	-- 1 --
2277	*		DC a a	NO TYPE ERROR
2278	*			NO ERROR TYPE
2279	*			ON EACH DATA CHK
2280	*			AND COMP ERROR
2281			a a	NO LOOPS
2282			a a	NO ERROR HALTS
2283			a a	HALT ON ERROR
2284	*	SPECIAL TADS ***	a a	REPEAT PASS
2285			a a	LOOP
2286			a a	DONT USE OLAP
2287			a a	EVEN PARITY
2288		DCW	a a	MOVE MODE
2289		DCW	a1000	LOAD MODE
2290	*			NO. OF REPEATS EACH REC LENGTH.
2291	*			MULTIPLY BY 20 FOR TOTAL NO.
2292	*			OF RECORDS TO BE WRITTEN.
2293	*	PROGRAM ALTER ROUTINE		*****
2294	*			*****
2295		ORG 1011		01011
2296		SBR ITREXES		01011 G 01065 G
2297		BA1 *E1		7 01018 R 01025 H
2298		RCP ITR2E4		7 01025 M ZTO 01060 R
2299		BEX1 ITR1.M		10 01035 R 01025 M
2300		BNT1 ITREXT		7 01042 R 01080 B
2301		BA1 ITR2		7 01049 R 01056 H
2302		RCPW 0		10 01056 L ZTO 00000 R
2303		BEX1 ITR2.M		7 01066 R 01056 H
2304		BA1 *E1		7 01073 R 01080 H
2305		B 0		7 01080 J 00000
2306	*			*****
2307	*	STANDARD TYPE ROUTINE 1		*****
2308	*			*****
2309		SBR TYP265		7 01087 G 01113 B
2310		SBR TYP368		7 01094 G 01135 B

T021-2 MULTI-CHANNEL INTERCHANGE TEST

T021

PAGE 37

PGLIN	LABEL	OPCOD	OPERAND	CT	ADDRS	INSTRUCTION
2311		BA1	*E1		7	01101 R 01108 G
2312		SCNRG	0,0		12	01108 D 00000 00000 Q
2313		SAR	TYP4E5		7	01120 G 01156 A
2314		WCP	0		10	01127 M ZTO 00000 W
2315		BCB1	TYP3		7	01137 R 01127 2
2316		BA1	*E1		7	01144 R 01151 G
2317		B	0		7	01151 J 00000
2318	*	CONSTANTS			5	01162 01796
2319	*				5	01167 01834
2320	*				5	01172 01872
2321		DCW	CH1-4		5	01177 01910
2322			CH2-4		5	01182 02905
2323			CH3-4		5	01187 03112
2324			CH4-4		5	01192 03319
2325	*	READ CONSTANTS			5	01197 03526
2326		DCW	RD11E16		5	01202 02910
2327			RD21E16		5	01207 03117
2328			RD31E16		5	01212 03324
2329			RD41E16		5	01217 03531
2330		RD11E21	COMP		3	01220
2331		RD21E21	ERROR		2	01222
2332		RD31E21	COUNT		2	01227
2333		RD41E21	ADDRESSES		1	01228
2334		000			1	01229
2335		DCW	00			
2336		DCW	2			
2337			2			
2338			2			
2339	*	DEFINE CONTROL CARDS				
2340	*					
2341	*					
2342		ORG	1245			01245
2343	*					
2344	*					
2345		DC	@20601A			5 01249
2346	*					
2347	*	TEST NUMBER AND SUFFIX				
2348	*					

T021-2 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 38

CT ADDRS INSTRUCTION

PGLIN LABEL OPCOD OPERAND

2349		ORG	1250		01250
2350		DCW	A10212		4 01253
2351		DC	ACA.G		1 01254
2352	*	***** STANDARD SYSTEM CONTROL CARD *****			
2353	*	***** STANDARD SYSTEM CONTROL CARD *****			
2354	*	***** STANDARD SYSTEM CONTROL CARD *****			
2355		ORG	1256	CHARACTER & PURPOSE COL	01256
2356		DC	a a ALPHA 0.I.X - 1410.1410ACC.7010 13		1 01256
2357		E1 DC	a a 0.1.3.5.7.9-10.20.40.60.80.100K 14		1 01257
2358		E2 DC	a a SPARE	15	1 01258
2359		E3 DC	a a 1,2-CHNL1 100.132 CHAR PRINTER	16	1 01259
2360		E4 DC	a a 1,2-CHNL2 100.132 CHAR PRINTER	17	1 01260
2361		E6 DC	a a SPARES	18-19	2 01262
2362		E7 DC	a a 1 - OVERLAP	20	1 01263
2363		E8 DC	a a 1 - PRIORITY ALERT	21	1 01264
2364		E11 DC	a a SPARES	22-24	3 01267
2365		E12 DC	a a 1 - CHANNEL ONE PRESENT	25	1 01268
2366		E13 DC	a a 1 - CHANNEL TWO PRESENT	26	1 01269
2367		E14 DC	a a 1 - CHANNEL THREE PRESENT	27	1 01270
2368		E15 DC	a a 1 - CHANNEL FOUR PRESENT	28	1 01271
2369		E19 DC	a a SPARES	29-32	4 01275
2370		E20 DC	a a 1 - REAL TIME CLOCK	33	1 01276
2371		E31 DC	a a SPARES	34-44	11 01287
2372		E32 DC	a a SPARES	45	1 01288
2373	*	***** CHANNEL ALTER ROUTINE *****			
2374	*	***** CHANNEL ALTER ROUTINE *****			
2375	*	***** CHANNEL ALTER ROUTINE *****			
2376		ORG	1290		01290
2377		SBR	CHSTIRE5		7 01290 6 01675 B
2378		MLNA	STARAD,SCANE10		12 01297 D 01681 01342 /
2379		SW	X11-4		6 01309 *
2380		S	X11		6 01315 S 00079
2381		A	ONES,X11		11 01321 A 01709 00079
2382		SCNLB	9999.0		12 01332 D 09999 00000 -
2383		SBR	ADDHLD		7 01344 G 01691 B
2384		A	ONES,ADDHLD		11 01351 A 01709 01691
2385		C	ADDHLD,STOPAC		11 01362 C 01691 01686
2386		BE	CHSTR		7 01373 J 01670 S

T021-2 MULTI-CHANNEL INTERCHANGE TEST

T021 / PAGE 39

PGLIN	LABEL	OPCOD	OPERAND	C1	ADDR	INSTRUCTION
2387		MLNA	ADDHLD,MLC65	12	01380	D 01691 01397 /
2388		MLCS	0,BCH&11	12	01392	D 00000 01415 3
2389		BCE	CHINS,K1,7	12	01404	B 01463 01703 7
2390		BCE		1	01416	B
2391		BCE		1	01417	B
2392		BCE	STINS	6	01418	B 01540
2393		BCE		1	01424	B
2394		BCE		1	01425	B
2395		BCE		6	01427	B 01571
2396		BCE	OLINS	11	01433	S 01709 01691
2397		S	ONES,ADDHLD	12	01444	D 01691 01342 /
2398		MLNA	ADDHLD,SCAN610	7	01456	J 01332
2399		B	SCAN	12	01463	D 01691 01485 /
2400		MLNA	ADDHLD,MLCX610	12	01475	D 01692 00 ⁰⁰ 0 3
2401		MLCS	CHCODE,0EX11	11	01487	A 01711 01691
2402		A	THREES,ADDHLD	12	01498	D 01691 01520 /
2403		MLNA	ADDHLD,CTDE10	12	01510	D 01708 00000 3
2404		MLCS	TNO,0	11	01522	S 01711 01691
2405		S	THREES,ADDHLD	7	01533	J 01433
2406		B	UPCAT	12	01540	D 01691 01562 /
2407		MLNA	ADDHLD,MLC610	12	01552	D 01693 00000 3
2408		MLCS	CHSTAT,0	7	01564	J 01433
2409		B	UPCAT	11	01571	A 01695 01691
2410		A	SIX,ADDHLD	12	01582	D 01691 01599 /
2411		MLNA	ADCHLD,MLC0E5	12	01594	D 00000 01617 3
2412		MLCS	0,HCSE11	12	01606	B 01628 01707 1
2413		BCE	SET0L,K2,1	1	01618	B
2414		BCE		1	01619	B
2415		BCE		1	01620	B
2416		B	REDUCE	7	01621	J 01652
2417		MLNA	ADDHLD,MLC610	12	01628	D 01691 01650 /
2418		MLCS	B0LOM,0	12	01640	D 01694 00000 3
2419		S	SIX,ADDHLD	11	01652	S 01695 01691
2420		B	UPCAT	7	01663	J 01433
2421		B	0	7	01670	J 00000
2422		DCW	PERR	5	01681	07352
2423		DCW	ERROUT	5	01686	06907

T021-2 MULTI-CHANNEL INTERCHANGE TEST

CT ADDRS INSTRUCTION

T021 PAGE 40

PGLIN LABEL OPCODE OPERAND

2425		DCW	00000	5 01691
2426		DCW	0	1 01692
2427		DCW	0	1 01693
2428		DCW	1	1 01694
2429		DCW	6	1 01695
2430		DCW	aJ13XRULM3	8 01703
2431			24321a	4 01707
2432			a a	1 01708
2433			1	1 01709
2434		DCW	a2a	1 01710
2435		DCW	3	1 01711
2436		DCW	aJa	1 01712
2437		DC	START	5 01717 02000
2438		DC	a a	1 01718
2439		H		1 01719 *
2440		DCW	a*a	1 01720
2441		ORG	1800	01800
2442		DA	1X37.G	01800
2443		DA	1X37.G	READY TABLE AREA
2444		DA	1X37.G	READY TABLE AREA
2445		DA	1X37.G	READY TABLE AREA
2446		DC	a*a	1 01952
2447	***** READ CONSTANTS *****	DCW	EREWOND	5 01957 05390
2448		DCW	00400	5 01962
2449		DCW	R011E11	5 01967 02900
2450		DCW	R021E11	5 01972 03107
2451			TEMP	
2452			RD31E11	5 01977 03314
2453			RD41E11	5 01982 03521
2454	NN	DCW	aNa	1 01983
2455	***** READ CONSTANTS *****	ORG	8960	08960
2456	***** READ CONSTANTS *****	DC	a*a	1 08960
2457		DCW	RAREA1E954	ADDRESSES
2458		DCW	RAREA2E954	FOR
2459			RAREA3E954	RECORD
2460			RAREA4E954	CHANGE
2461				
2462				

CT ADDRS - INSTRUCTION

T021-2 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 42

PGLIN	LABEL	OPCOD	OPERAND	CT	ADDRS	INSTRUCTION
2500			a1 1 1 1 1 J250UQ J250UQ a	28	09786	
2501			a1248Y- 1248E- 136aYE-136aYE-a	28	09814	
2502			ARSNOV.URSNOV.U1K49SM81K49SM8a SL TSL DSGLL DSGLL DSGLL DSGLL a1CPEPMTa1CPMMTB.GLMMTB.GLMMTa GG GG RECS	28	09842	
2503			a13TTIZHEJ3ITZHEAL7M.OHAL7M.OHA a1 1 1 1 1 J250UQ J250UQ a	28	09870	
2504			RECS a1248Y- 1248E- 136aYE-136aYE-a	28	09898	
2505			SHORT	28	09926	
2506			a1248Y- 1248E- 136aYE-136aYE-a	28	09954	
2507		DCW	00000a.G	4	09958	
2508	*		RECORD LENGTHS INCREASED FROM RIGHT TO LEFT			
2509	*		1 ST. 100 RECORDS ARE- 6aYE-			
2510	*		2 ND. 100 RECORDS ARE- Ya-136aYE-			
2511	*					
2512		ORG	9960			CHANNEL CODES
2513		DCW	a20M.a*\$\$a			
2514			aRX31RX31a			
2515		DCW	a			BLANKS
2516			a0000 a			FOR ERROR
2517			a0000 a			TABLE
2518			a0000a.G			
2519	*		*****			
2520	RAREA1	EQU	7000			CHANNEL 1 READ AREA
2521	RAREA2	EQU	8000			CHANNEL 2 READ AREA
2522	RAREA3	EQU	16000			CHANNEL 3 READ AREA
2523	RAREA4	EQU	17000			CHANNEL 4 READ AREA
2524		ORG	2000			
2525		NOPWM				
2526	RESTART	B	REWDND BR AFTER FIRST TIME TO RESTART	7	02001	J 05390
		SW	RESTR			SET BRANCH FOR RESTART
2527		MRCWG	10.CH1			REPLACE RDY TBL
2528		MRCWG	170.1000			REPLACE TADS
2529						
2530		BNQ	IIR	7	02038	J 01011 Q
2531	*		*****			
2532	*		READ INITIALIZATION			
2533	*		*****			
2534	*		INITIALIZE ODD-EVEN PARITY. MOVE-LOAD MODE ***			
2535		BCE	EPARY.TAD5.1			BR IF ODD PARITY
2536		MLCS	0B2.READY2			ODD PARITY CODES
2537		MLCS	0B2.READ2			ODD PARITY CODES

T021-2 MULTI-CHANNEL INTERCHANGE TEST

c6/ PAGE 43

T021

CT ADDRS INSTRUCTION

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
2538		MLCS	#B6•READ3&2	12	02081	D 01722 07435 3
2539		MLCS	#B6•READ4&2	12	02093	D 01722 07977 3
2540		B RMCDE		7	02105	J 02160
2541	EPIRY	MLCS	#U2•READ1&2	12	02112	D 01723 04311 3
2542		MLCS	#U2•READ2&2	12	02124	D 01723 04843 3
2543		MLCS	#U2•READ3&2	12	02136	D 01723 07435 3
2544		MLCS	#U2•READ4&2	12	02148	D 01723 07977 3
2545	RMODE	BCE	LMD, TAD6, 1	12	02160	S 02227 01006 1
2546		MLCS	#M2•READ1	12	02172	D 01724 04309 3
2547		MLCS	#M2•READ2	12	02184	D 01724 04841 3
2548		MLCS	#M2•READ3	12	02196	D 01724 07433 3
2549		MLCS	#M2•READ4	12	02208	D 01724 07975 3
2550		B OUTLM		7	02220	J 02275
2551	LMD	MLCS	#L2•READ1	12	02227	D 01725 04309 3
2552		MLCS	#L2•READ2	12	02239	D 01725 04841 3
2553		MLCS	#L2•READ3	12	02251	D 01725 07433 3
2554		MLCS	#L2•READ4	12	02263	D 01725 07975 3
2555		OUTLM	MNNA ERET2, STARAD	12	02275	D 01730 01681 /
2556		MNNA ERDERRT, STCPAD	-STOP ADDRS	12	02287	D 01735 01686 /
2557	CS	99	CLEAR INDEX REGS	6	02299	/ 00099
2558	MRCWM	RESTW, 1	MOVE RESTART BR TO LOC 1	12	02305	D 01712 00001 G
2559	CW	CH1R, CH2R	INITIALIZE	11	02317	D 03884 04416 G
2560	BBE	*E7, CH1E4, M	LOOK FOR CHNLS THAT	12	02328	W 02346 01804 M
2561	SW	CH1R	HAVE NO RDY DRIVES	6	02340	* 03884
2562	BBF	*E7, CH2E4, M	SET SWITCHES TO	12	02346	W 02364 01842 M
2563	SW	CH2R,	BYPASS CHANNEL	6	02358	* 04416
2564	MOVRT	BCE *E32, SYS1, X	IF 7010	12	02364	B 02407 01256 X
2565	MLCWS	NN, 1ST010	NOP	12	02376	D 01983 04947 7
2566	MLCWS	NN, 1ST010E12	NUP	12	02388	D 01983 04959 7
2567	B	RDI-SKP	BR IF NOT A 7010	7	02400	J 02466
2568		MRCWR 7000, 13000	MOVE CH 3E4 READ	12	02407	D 07000 13000 M
2569	*		ROUTINES TO 13000			
2570	*		IF 7010 COMPUTER			
2571	CW	CH3RE1, CH4RC1	MARK	11	02419	D 13001 13543 G
2572	BBE	*E7, CH3E4, M	CHANNELS OUT THAT	12	02430	W 02448 01880 M
2573	SW	CH3RE1	HAVE NO	6	02442	* 13001
2574	BBE	*E7, CH4E4, M	READY DRIVES	12	02448	W 02466 01918 M

1021-2 MULTI-CHANNEL INTERCHANGE TEST

1021 PAGE 44

CT ADDRS INSTRUCTION

2575 SW CH4RC1

2576 ***** RESTART READ PASS HERE *****

2577 ***** RESTART READ PASS HERE *****

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
2578		RDHSKP	CW SWC1,SWC2	11	02466	■ 04199 04731
2579		CW	SW17R,SW27R	11	02477	■ 04186 04718
2580		CW	SW12R,SW22R	11	02488	■ 04148 04680
2581		CW	CH 1 E 2	6	02499	S 06965
2582		S	ZRER	12	02505	8 02524 01256 X
2583		BCE	*68,SYSL,X	7	02517	J 02557
2584		8	NO34	11	02524	■ 13323 13865
2585		CW	SWC3,SWC4	11	02535	■ 13310 13852
2586		CW	SW37R,SW47R	11	02546	■ 13272 13814
2587		CW	SW32R,SW42R	6	02557	■ 05024
2588	NO34	CW	CH 3 E 4	12	02563	8 02690 01004 1
2589		BCE	REC UPDATE SW	12	02575	8 02594 01263 1
2590		BCE	*68,SYSLC7,1	7	02587	J 02690
2591		8	NOLAPR	11	02594	• 04320 04852
2592	OLAR	SW	BOLR1,BOLR2	12	02605	D 01736 04310 3
2593		MLCS	aaa,READ1&1	12	02617	D 01737 04842 3
2594		MLCS	a*a,READ2&1	12	02629	B 02648 01256 X
2595		BCE	*68,SYSL,X	7	02641	J 02823
2596		B	INCRD	12	02648	D 01738 13434 3
2597		MLCS	a\$&,READ3Z&1	12	02660	D 01739 13976 3
2598		MLCS	a#a,READ4Z&1	11	02672	• 13444 13986
2599		SW	BOLR3,BOLR4	7	02683	J 02823
2600		B	INCRD	12	02690	D 01740 04310 3
2601	NOLAPR	MLCS	a%a,READ1&1	12	02702	D 01741 04842 3
2602		MLCS	a@a,READ2&1	11	02714	■ 04320 04852
2603		CW	BOLR1,BOLR2	11	02725	■ 03938 04295
2604		CW	SRD1,LOOPR1-T	11	02736	■ 04470 04827
2605		CW	SRD2,LOOPR2-T	12	02747	B 02766 01256 X
2606		BCE	*68,SYSL,X	7	02759	J 02823
2607		B	INCRD	12	02766	D 01742 13434 3
2608		MLCS	a@A,READ3Z&1	12	02778	D 01743 13976 3
2609		MLCS	a@.a,READ4Z&1	11	02790	■ 13444 13986
2610		CW	BOLR3,BOLR4	11	02801	■ 13055 13419
2611		CW	I3R2,SL3	11	02812	■ 13597 13961
2612		CW	I4R1,SL4			

T021-2 MULTI-CHANNEL INTERCHANGE TEST

C63
PAGE 45

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDR	INSTRUCTION
2613	INQRD	BNQ	I TR	7	02823	J 01011 Q
2614		SW	X9-4,X15-4	11	02830	* 00065 00095
2615		S	X15	6	02841	S 00099
2616		SW	X1-4,X14-4	11	02847	* 00025 00090
2617		Z A	E2,X14 INITALIZE FOR IDENT. RECORD	11	02858	Q M 01744 00094
2618	MNLA	RESTR,6	MOVE RESTART ADDRESS TO LOC 1	12	02869	D 01957 00006 /
2619		B	BLKRT	7	02881	J 03717
2620		H		1	02888	*
2621		*	***** ERROR COUNT AREA *****			
2622		*				
2623		*	*****			
2624	RD11	DA	1X207	CH 1 *	02889	
2625	RD21	DA	1X207	CH 2 *	03096	
2626	RD31	DA	1X207	CH 3 *	03303	
2627	RD41	DA	1X207	CH 4 *	03510	
2628	BLKRT	S	X9	ZERO X9	6	03717 S 00069
2629		Z A	@36@.MMM	NO OF MOVES TO CNTR	11	03723 Q 01746 01222
2630	MOVBLK	MRCWG	BLK, RD11&X9	MOVE BLANKS WITH	12	03734 D 09976 02QY9 L
2631		MLCWS	WMGM, RD11&22&X9	WMGM TO STOP D/M	12	03746 D 01007 02R/1 7
2632		A	623,X9	WMKS TO ERROR	11	03758 A 01748 00069
2633		S	31@.MMM	COUNT AREA	11	03769 S 01749 01222
2634		82	*68	BR AFTER 36TH. PASS	7	03780 J 03794 V
2635		B	MOVBLK		7	03787 J 03734
2636		*	***** READ TAPE ROUTINE *****			
2637		*				
2638	RROUT	SW	ZERO@4			
2639		SW			6	03794 * 01227
2640		SW		1	03800	*
2641		SW		1	03801	*
2642		SW		1	03802	*
2643		SW	SW13R, SW23R	COMP ROUT SWITCH	11	03803 * 03930 04462
2644		BCE	*68,SYSL,X	BR IF A 7010	12	03814 B 03833 01256 X
2645		B	*612		7	03826 J 03844
2646		SW	SW33R, SW43R	COMP ROUT SWITCH	11	03833 * 13047 13589
2647		S	X1	ZERO X1	6	03844 S 00029
2648		Z S	@46@.X15		11	03850 * 01751 00099
2649	UPREAD	A	64,X1	STEP DR NO	11	03861 A 01752 00029
2650		A	@23@.X15		11	03872 A 01754 00099

T021-2 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 46
CT ADDRS INSTRUCTION

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
2651		NOPWM		1	03883	N
2652		CH1R	*68 SW13R-13	7	03884	J 03898
2653		PS11R	CW ZEROE1 SW SW13R CH2R-1 BW SWC1E7.CH1-4CX1 NOPWM	7	03891	J 03917
2654			BR IF NO READY DRIVES CH 1 MARK CH FINISHED SET BR ARND COMP BR NEXT CH BR- DRV OUT OF TEST	6	03898	0 01224
2655			BR FIRST TIME SWITCH	6	03904	0 03930
2656			BR ON ANU ERROR BR IF NO ERRORS DR AND CH NO -TO ERROR MSG SET UP	7	03910	J 04415
2657			NOERR1 READ1E3.MSGEXC15 MLCS READ1E3.CHCODE DR3,CHSTAT CH ALTER ROUTINE	12	03917	Y 04206 01726 1
2658			MLCS READ1E3.TDNO MLCS READ1E3.CHCODE DR3,CHSTAT CH ALTER ROUTINE	6	03917	D 01749
2659			MLCS READ1E3.TDNO MLNA CI.DRF1NRC5 TM1,TEMPRE10 PM1,PERMRE10 MLNA @06999a.MLM65 SW SW15R RDERR CLR1 RDERR	12	03917	D 04310 01692 3
2660			MLNA COMPARE ROUT ADDRESSES FOR CH ONE RE-READ SWITCH	12	03917	D 01755 01693 3
2661			MLNA @0a0,XXX READ1E3.CMMSG615 MLCS READ1E3.CMMSG615 CH NÜ TO LM CHK MSG	12	04001	D 04312 01708 3
2662			MLCS READ1E3.TDNO MLNA CI.DRF1NRC5 TM1,TEMPRE10 PM1,PERMRE10 MLNA @06999a.MLM65 SW SW15R RDERR CLR1 RDERR	12	04013	D 01162 06634 /
2663			MLNA COMPARE ROUT ADDRESSES FOR CH ONE RE-READ SWITCH	12	04025	D 01967 06692 /
2664			MLNA @0a0,XXX READ1E3.CMMSG615 MLCS READ1E3.CMMSG615 CH NÜ TO LM CHK MSG	12	04037	D 01182 06756 /
2665			MLNA RDERR CLR1 RDERR	12	04049	D 01760 06946 /
2666			MLNA RDERR CLR1 RDERR	6	04061	J 04408
2667			MLNA RDERR CLR1 RDERR	7	04067	J 06384
2668			MLNA RDERR CLR1 RDERR	7	04074	J 04261
2669			MLNA RDERR CLR1 RDERR	12	04081	D 08965 05802 /
2670			MLNA RDERR CLR1 RDERR	12	04093	D 01202 05825 /
2671			MLNA RDERR CLR1 RDERR	12	04105	D 04312 05860 3
2672			MLNA RDERR CLR1 RDERR	6	04117	D 01749
2673			MLNA RDERR CLR1 RDERR	12	04123	D 01749 06872 3
2674			MLNA RDERR CLR1 RDERR	12	04135	D 01761 08981 3
2675			MLNA RDERR CLR1 RDERR	1	04147	N
2676			MLNA RDERR CLR1 RDERR	7	04148	J 04185
2677			MLNA RDERR CLR1 RDERR	12	04155	D 07001 02H10 L
2678			MLNA RDERR CLR1 RDERR	12	04167	D 04312 02H14 3

T021-2 MULTI-CHANNEL INTERCHANGE TEST

PAGE 47

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION	
2689		MLCS	#16	6	04179	D 01749	
2690		NOP	LOAD MODE CHECK SWITCH	1	04185	N	
2691	SW17R	BCE	CHKLM.TAD6.1	12	04186	B 06764 01006 1	
2692		NOP	SWITCH ARND	1	04198	N	
2693	SWC1	B	CMPRT	7	04199	J 05790	
2694		CW	SW13R	6	04206	H 03930	
2695	XXXR1	BCE	PS11R.CH1&X1.	12	04212	B 03898 01840	
2696		BW	CH2R-1.CH1&X1	12	04224	V 04415 01840 1	
2697		MLCS	CH1&X1.READ1&3	12	04236	D 01840 04312 3	
2698	INQ1	BNQ	ITR	7	04248	J 01011 Q	
2699		CW	SW15R	6	04255	H 04408	
2700	CLR1	CS	RAREA1&954	6	04261	/ 07954	
2701		CS	**	1	04267	/	
2702		CS	**	1	04268	/	
2703		CS	**	1	04269	/	
2704		CS	**	1	04270	/	
2705		CS	**	1	04271	/	
2706		CS	**	1	04272	/	
2707		CS	**	1	04273	/	
2708		CS	**	1	04274	/	
2709		CS	**	1	04275	/	
2710		MLCWS	WMGM.RAREA1&X14	12	04276	D 01007 07H.0 7	
2711		SW	RARE1	*	6	04288	* 07000
2712		NOP	SWITCH	1	04294	Y	
2713		BOL1	*-6	7	04295	J 04295 1	
2714	LOOPRI	BAL	*E1	7	04302	R 04309 H	
2715	READ1	RIB	11.RARE1	10	04309	M 4B1 07000 R	
2716		NCPWM		1	04319	N	
2717	BOLR1	BOL1	OLOK1	7	04320	J 04395 1	
2718		BCB1	READY	7	04327	R 04309 2	
2719		BNR1	CH2R-1	7	04334	R 04415 1	
2720		BCE	OLOK1.TAD4.1	12	04341	B 04395 01004 1	
2721		BCE	*E8.SYS1&7.1	12	04353	B 04372 01263 1	
2722		B	OLOK1	7	04365	J 04395	
2723		B	TYP1	7	04372	J 01087	
2724		DCW	2NC BR OLAP CH 1a.G	15	04393		
2725	CLOK1	BCE	INC1.TADI.1	12	04395	B 04248 01001 1	
2726			NOPWM	1	04407	N	

T021-2 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 48

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
2727	SW1SR	B	SRC1-1			
2728	*	*	CHANNEL TWO READ		7	04408 J 03937
2729	*	*	RE-READ			
2730	*	*	CHANNEL TWO READ			
2731		NOPNM		1	04415 N	
2732	CH2R	B	*28	7	04416 J 04430	BR IF NO READY
		B	SW23R-13			DRIVES ON CH 1
2733	PS22R	CW	ZERO62	7	04423 J 04449	MARK CH FINISHED
2734		SW	SW23R	6	04430 n 01225	SET BR ARND COMP
2735				6	04436 , 04462	
2736		B	1\$7010	7	04442 J 04947	BR NEXT CH
2737		BW	SWC267,CH2-4EX1	12	04449 V 04738 01814 1	BR- DRV OUT OF TEST
2738			NOPNM	1	04461 N	
2739	SW23R	B	SWC267	7	04462 J 04738	BR FIRST TIME
2740			NCP	1	04469 N	SWITCH
2741	SRD2	BUL2	--6	7	04470 J 04470 2	
		BA2	*68			BR ON ANY ERROR
2742		B	NOERR2	7	04477 K 04491 H	BR IF NO ERRORS
2743		MLCS	READ263,MSGEXEC15	7	04484 J 04613	DR AND CH NO
2744		MLCS	READ261,CHCODE	12	04491 D 04844 06553 3	TO ERROR MSG
2745		MLCS	READ261,CHCODE	6	04503 D 01762	SET UP
2746		MLCS	READ263,TND0	12	04509 D 04842 01692 3	CH ALTER
2747		MLCS	AX2,CHSTAT	12	04521 D 01763 01693 3	ROUTINE
2748		MLCS	READ263,TND0	12	04533 D 04844 01708 3	ERROR ROUTINE
2749		MLNA	C2,DRFINRES	12	04545 D 01167 06634 /	ADDRESSES FOR
2750		MLNA	TM2,TEMPREC10	12	04557 D 01972 06692 /	CH TWO
2751		MLNA	PH2,PERMREC10	12	04569 D 01187 06756 /	
2752		MLNA	2079993,MZME5	12	04581 D 01766 06946 /	
2753		SW	SW25R	6	04593 , 04940	RE-READ SWITCH
2754		B	RDERRT	7	04599 J 06384	BR- ERROR ROUTINE
2755		B	CLR2	7	04606 J 04793	BR TO READ
2756	NOERR2	MLNA	RD2,CMPCNT65	12	04613 D 08970 05802 /	COMP ROUTINE
			CP2,CMPCNT610	12	04625 D 01207 05825 /	ADDRESSES
2757		MLCS	READ263,CMMSGTS	12	04637 D 04844 05860 3	
2758		MLCS	READ263,CMMSGTS	6	04649 D 01762	
2759		MLCS	326	12	04655 D 01762 06872 3	CH NO TO LM CHK MSG
2760		MLCS	326,LHMSG	12	04667 D 01761 08981 3	ZERO ERROR COUNT
2761		MLCS	306,XXX			SWITCH ARND
2762		NOP		1	04679 N	
2763	SW22R	B	SW27R-1	7	04680 J 04717	IDENT MOVES
			RAREA261,RO2161X15	12	04687 D 08001 03H17 L	
2764		MLCB				

T021-2 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 49

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
2765		MLCS	READ2E3, RD21E5EX15	12	04699	D 04844 03AH1 3
2766		MLCS	22a	6	04711	D 01762

2767		NOP	LOAD MODE CHECK SWITCH	1	04717	N
2768	SW27R	BCE	CHKLM,TAD6,1	12	04718	B 06764 01006 1
2769		NOP	SWITCH ARND	1	04730	N
2770	SWC2	B	CMPRUT	7	04731	J 05790
2771		CW	SW23R	6	04738	□ 04462
2772	XXXR2	BCE	PS22R, CH2EX1.	12	04744	B 04430 018T8
2773		BW	IS7010, CH2EX1	12	04756	V 04947 018T8 1
2774		MLCS	CH2EX1, READ2E3	12	04768	D 018T8 04844 3
2775	INQ2	BNQ	ITR	7	04780	J 01011 Q
2776		CW	SW25R	6	04787	□ 04940
2777	CLR2	CS	RAREA2E954	6	04793	/ 08954
2778		CS	**	1	04799	/
2779		CS	**	1	04800	/
2780		CS	**	1	04801	/
2781		CS	**	1	04802	/
2782		CS	**	1	04803	/
2783		CS	**	1	04804	/
2784		CS	**	1	04805	/
2785		CS	**	1	04806	/
2786		CS	**	1	04807	/
2787		MLCS	WMGM,RAREA2E14	12	04808	D 01007 08H1 0 7
2788		SW	RAREA2	6	04820	• 08000
2789		NOP	SWITCH	1	04826	N
2790		BOL2	WAIT FI SCOPE LOOP	7	04827	J 04827 2
2791	LOOPR2	BA2	*6	7	04834	X 04841 H
2792	READ2	RTB	21,RAREA2	10	04841	M DB1 08000 R
2793		NOPWM	READ TAPE	1	04851	N
2794		BOLR2	SWITCH	7	04852	J 04927 2
2795		BCB2	BR- OVERLAP	7	04859	X 04841 2
2796		BNR2	BR- BUSY	7	04866	X 04947 1
2797		BCE	BR- NOT READY	12	04873	B 04927 01004 1
2798		BCE	BR IF NOT USING OLAP	12	04885	B 04904 01263 1
2799		B	BR-IF OLAP AVAIL	7	04897	J 04927
2800		B	BR-IF OLAP NOT AVAIL	7	04904	J 01087
2801		TYP1	OLCK2	15	04925	
2802		DCW	INC BR OLAP CH 2a.G	12	04927	R 04780 01001 1
		BCE	INC2,TADI,1			

TO21-2 MULTI-CHANNEL INTERCHANGE TEST

TO21 PAGE 50

PGLIN LABEL OPCOD OPERAND

PGLIN	LABEL	OPCOD	OPERAND	CT	ADDRS	INSTRUCTION
2803		NOPWM		1	04939	N
2804	SW25R	B	SRD2-1	7	04940	J 04469
2805	FS7010	BCE	CH3R,SYSL14,1	12	04947	B 13000 01270 1
2806		BCE	CHAR,SYSL15,1	12	04959	B 13542 01271 1
2807		CW	ZERO63,ZERO64	11	04971	B 01226 01227
2808		B	NXTREC	7	04982	J 04993
2809	H			1	04989	-
2810		ORG	7000		07000	
2811	*		CH 364 READ ROUTINES READ INTO			
2812	*		CH 1 & 2 READ AREAS. THESE			
2813	*		ROUTINES ARE MOVED TO 13000			
2814	*		IN THE READ INITIALIZATION IF			
2815	*		THE COMPUTER IS A 7010.			
2816	*		SEE THE BACK OF THIS LISTING			
2817	*		FOR ACTUAL ADDRESSES.			
2818	*		*****			
2819	*		CHANNEL THREE READ			
2820	*		*****			
2821	CH3R2	NOPWM		1	07000	N
2822		B	PS33R	7	07001	J 13015
2823		B	SW33R-13	7	07008	J 13034
2824		CN	ZERO63	6	07015	B 01226
2825		SH	SW33R	6	07021	J 13047
2826		B	CH4R	7	07027	J 13542
2827		BW	SWC367,CH3-4&X1	12	07034	V 13330 018X2 1
2828		NOPWM		1	07046	N
2829		B	SWC367	7	07047	J 13330
2830		NOP		1	07054	N
2831		DCW	AJ6	1	07055	-
2832		DC	13R2	5	07060	13055
2833		DC	3	1	07061	-
2834		DCW	A36	1	07062	-
2835		DC	13R1	5	07067	13076
2836		DC	6	1	07068	-
2837		B	NOERR3	7	07069	J 13205
2838		MLCS	READ32E3,MSGEX615	12	07076	D 13436 06553 3
2839		MLCS	A36	6	07088	D 01769
2840		MLCS	READ32E1,CHCODE	12	07094	D 13434 01692 3

T021-2 MULTI-CHANNEL INTERCHANGE TEST

T021

PGLIN	LABEL	OPCOD	OPERAND	C/I	ADDRS	INSTRUCTION
	2841	MLCS	#32.CHSTAT	CH	ALTER	
	2842	MLCS	READ32&3.TDNO	ROUTINE	12	07106 D 01769 01693 3
	2843	MLNA	C3,DRFINR65	ERROR ROUTINE	12	07118 D 13436 01708 3
	2844	MLNA	TM3,TEMPR610	ADDRESSES FOR	12	07130 D 01172 06634 /
	2845	MLNA	PM3,PERMR610	CH THREE	12	07142 D 01977 06692 /
	2846	MLNA	@15999@,MZM65		12	07154 D 01192 06756 /
	2847	SW	SW35R	RE-READ SWITCH	12	07166 D 01774 06946 /
	2848	B	RDERRT	BR- ERROR ROUTINE	6	07178 + 13535
	2849	B	CLR3	BR TO READ	7	07184 J 06384
	2850	B	XXXR3	AROUND COMP ON ERROR	7	07191 J 13385
	2851	MLNA	RD3.CMPREC65	COMP ROUT	12	07205 D 08975 05802 /
	2852	MLNA	CP3.CMPCNTE10	ADDRESSES	12	07217 D 01212 05825 /
	2853	MLCS	READ32&3.CMSG615		12	07229 D 13436 05860 3
	2854	MLCS	@32		6	07241 D 01769
	2855	MLCS	@32.LMMMSG	CH NO TO LM CHK MSG	12	07247 D 01769 06872 3
	2856	MLCS	@0@.XXX	ZERO ERROR COUNT	12	07259 D 01761 08981 3
	2857	NOP		SWITCH ARND	1	07271 N
	2858	B	SW37R-1	IDENT MOVES	7	07272 J 13309
	2859	MLCB	RAREA3&1.RD31&1EX15		12	07279 D 16001 03CH4 L
	2860	MLCS	READ32&3.RD31&5EX15		12	07291 D 13436 03CMB 3
	2861	MLCS	@32		6	07303 D 01769
	2862	NOP		LOAD MODE CHECK SWITCH	1	07309 N
	2863	BCE	CHKLM,TAD6,1	BR TO LM CHK ROUT	12	07310 B 06764 01006 1
	2864	NOP			1	07322 N
	2865	B	CMPRUT	BR TO COMPARE ROUT	7	07323 J 05790
	2866	CW	SW33R		6	07330 @ 13047
	2867	BCE	PS33R,CH3&X1.	BR- ALL DRIVES READ	12	07336 B 13015 018X6
	2868	BW	CH4R,CH3&X1	- DRV OUT OF TEST	12	07348 V 13542 018X6 1
	2869	MLCS	CH3&X1,READ32&3	DR NO TO READ	12	07360 D 018X6 13436 3
	2870	BNQ	I1R	INQUIRY REQUEST	7	07372 J 01011 Q
	2871	CW	SW35R	DONT RE-READ	6	07379 @ 13535
	2872	CS	RAREA3&954	CLEAR READ AREA	6	07385 / 16954
	2873	CS		**	1	07391 /
	2874	CS		**	1	07392 /
	2875	CS		**	1	07393 /
	2876	CS		**	1	07394 /
	2877	CS		**	1	07395 /
	2878	CS		**	1	07396 /

T021-2 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 52

PGLIN LABEL OPCODE OPERAND

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
2879		CS	**	1	07397	/
2880		CS	**	1	07398	/
2881		CS	**	1	07399	/
2882		MLCWS	WMGM.RAREA3&X14	12	07400	D 01007 16M.0 7
2883		SW	RAREA3	*	6	07412 * 16000
2884		NOP		1	07418	N
2885		DCW	aJ2	1	07419	
2886		DC	SL3	5	07424	13419
2887		DC	3	1	07425	
2888		DCW	a36	1	07426	
2889		DC	READ3Z	5	07431	13433
2890		DC	aMa	1	07432	
2891	READ3	DCW	aMKB13	4	07433	
2892		DC	RAREA3	5	07441	16000
2893		DC	aRa	1	07442	
2894		NOPWM		1	07443	N
2895		DCW	aJ2	1	07444	
2896		DC	OLOK3	5	07449	13522
2897		DC	3	1	07450	
2898		DCW	a36	1	07451	
2899		DC	READ3Z	5	07456	13433
2900		DC	2	1	07457	
2901		DCW	a36	1	07458	
2902		DC	CH4R	5	07463	13542
2903		DC	1	1	07464	
2904		BCE	OLOK3.TAD4,1	12	07465	B 13522 01004 1
2905		BCE	DNBR3.SYS167,1	12	07477	B 13496 01263 1
2906		B	OLCK3	7	07489	J 13522
2907		B	TYP1	7	07496	J 01087
2908		DCW	ADIONT BR OLAP CH 3a.G	18	07520	
2909		BCE	INC3.TADI,1	12	07522	B 13914 01001 1
2910		NOPWM		1	07534	N
2911		B	I3R2-1	7	07535	J 13054
2912		*****	CHANNEL FOUR READ	*****	*****	*****
2913		*	*****	*****	*****	*****
2914		*	*****	*****	*****	*****
2915	CH4RZ	NOPWM	BR IF NO READY	1	07542	N
2916		8 PS44R	DRIVES ON CH 4	7	07543	J 13557

T021-2 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 53

PGLIN	LABEL	OPCODE	OPERAND	CY	ADDRS	INSTRUCTION
2917		B	SW43R-13		7	07550 J 13576
2918		CH	ZERO@4		6	07557 □ 01227
2919		SW	SW43R		6	07563 □ 13589
2920		B	NXTREC		7	07569 J 04993
2921		BW	SWC467.CH4-46X1		12	07576 V 13872 019/0 1
2922			NOPWM		1	07588 N
2923		B	SWC467	BR FIRST TIME	7	07589 J 13872
2924			NOP	SWITCH	1	07596 N
2925		DCW	@J@		1	07597
2926		DC	14R1	ANY	5	07602 13597
2927		DC	4	BRANCH	1	07603
2928		DCW	@1@		1	07604
2929		DC	14R2	ANY	5	07609 13618
2930		DC	G	ERRUR	1	07610
2931		B	NOERR4	BR IF NO ERRORS	7	07611 J 13747
2932		MLCS	READ42E3.MSGEXEC15	DR AND CH NO	12	07618 D 13978 065553 3
2933		MLCS	@4@	TO ERROR MSG	6	07630 D 01775
2934		MLCS	READ42E1.CHCODE	SET UP	12	07636 D 13976 01692 3
2935		MLCS	@1@.CHSTAT	CH ALTER	12	07648 D 01749 01693 3
2936		MLCS	READ42E3.TCNO	ROUTINE	12	07660 D 13978 01708 3
2937		MLNA	C4.DRFINRES	ERROR ROUTINE	12	07672 D 01177 06634 1
2938		MLNA	TM4.TMPREC10	ADDRESSES	12	07684 D 01982 06692 1
2939		MLNA	PH4.PERMREC10	FOR CH 4	12	07696 D 01197 06756 1
2940		MLNA	@16999@.NZMES		12	07708 D 01780 06946 1
2941		SW	SW45R	RE-READ SWITCH	6	07720 □ 14077
2942		B	RDERRT	BR- ERROR ROUTINE	7	07726 J 06384
2943		B	CLR4	BR TO READ	7	07733 J 13927
2944		B	XXXX4	AROUND COMP ON ERROR	7	07740 J 13878
2945		MLNA	RD4.CMPREC65	COMP ROUT	12	07747 D 08980 05802 1
2946		MLNA	CP4.CMPCNT610	ADDRESSES	12	07759 D 01217 05825 1
2947		MLCS	READ42E3.CMSGE15		12	07771 D 13978 05860 3
2948		MLCS	@4@	SWITCH ARND	6	07783 D 01775
2949		MLCS	@4@.LMMMSG	CH NO TO LM CHK MSG	12	07789 D 01775 06872 3
2950		MLCS	@0@.XXX	ZERO ERROR COUNT	12	07801 D 01761 08981 3
2951			NOP		1	07813 N
2952		B	SW47R-1	IDENT MOVES	7	07814 J 13851
2953		MLCD	RAREA4E1.RC41E1EX15		12	07821 D 17001 03EA1 L
2954		MLCS	READ42E3.RC41E5CX15		12	07833 D 13978 03CA5 3

1021-2 MULTI-CHANNEL INTERCHANGE TEST

CT ADDRS INSTRUCTION

PAGE 54

PGLIN	LABEL	OPCODE	OPERAND	CT	ADRS	INSTRUCTION
2955		MLCS	348		6	07845 D 01775
2956		NOP			1	07851 N
2957		BCE	CHKLM.TAD6•1	BR TO LM CHK ROUT	12	07852 B 06764 01006 1
2958		NOP			1	07864 N
2959		B	CMPRUT	BR TO COMPARE ROUT	7	07865 J 05790
2960		CW	SW43R		6	07872 □ 13589
2961		BCE	PS44R.CH4&XI.	BR-ALL DRIVES READ	12	07878 B 13557 019/4
2962		BW	NXTREC.CH4&XI.	-DRIVE OUT OF TEST	12	07890 V 04993 019/4 1
2963		MLCS	CH4&XI,READ4Z&3	DR NO TO READ	12	07902 D 019/4 13978 3
2964		BHQ	ITR	INQUIRY REQUEST	7	07914 J 01011 Q
2965		CW	SW45R	DONT RE-READ	6	07921 □ 14077
2966		CS	RAREA4&954	CLEAR READ AREA	6	07927 / 17954
2967		CS	**		1	07933 /
2968		CS	**		1	07934 /
2969		CS	**		1	07935 /
2970		CS	**		1	07936 /
2971		CS	**		1	07937 /
2972		CS	**		1	07938 /
2973		CS	**		1	07939 /
2974		CS	**		1	07940 /
2975		CS	**		1	07941 /
2976		MLCWS	WMGM,RAREA4&X14	DEFINE RECORD LENGTH	12	07942 D 01007 179'0 7
2977		SW	RAREA4		6	07954 * 17000
2978		NOP			1	07960 N
2979		DCW	BJJ	SWITCH	1	07961
2980		DC	SL4	WAIT IF	5	07966 13461
2981		DC	4	SCOPE	1	07967
2982		DCW	012	LOOP	1	07968
2983		DC	READ4Z		5	07973 13975
2984		DC	0M2		1	07974
2985		DCW	0M•012	READ	4	07975
2986		DC	RAREA4	TAPE	5	07983 17000
2987		DC	0R2		1	07984
2988		NOPWM			1	07985 N
2989		DCW	BJJ	BR-OLAP	1	07986
2990		DC	OLCK4		5	07991 14064
2991		DC	4		1	07992
2992		DCW	012	BRANCH	1	07993

TO21-2 MULTI-CHANNEL INTERCHANGE TEST

TO21 PAGE 55

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDR	INSTRUCTION
2993		DC	READ4Z	5	07998	13975
2994		DC	2	1	07999	
2995		DCW	a1a	1	08000	BRANCH
2996		DC	NXTREC	5	08005	NOT READY

2997		DC	1	1	08006	
2998		BCE	OLOK4.TAD4.1	12	08007	BR IF NOT USING OLAP
2999		BCE	DNBR4.SYS167.1	12	08019	BR-IF OLAP AVAIL
3000		B	OLOK4	7	08031	BR-IF OLAP NOT AVAIL
3001		B	TYP1	7	08038	J 01087
3002		DCW	ADIONT BR CLAP CH 40.G	18	08062	
3003		BCE	INC4.TAD1.1	12	08064	LOOP TAD
3004		NOPWM		1	08076	N
3005		B	I4R1-I	7	08077	RE-READ
3006		B	NXTREC	7	08084	J 04993
3007		H		1	08091	.
3008		DC	@@@	1	08092	
3009		ORG	4993	04993		
3010	*		***** RECORD UPDATE *****			
3011	*		***** RECORD UPDATE *****			
3012	*		***** RECORD UPDATE *****			
3013	NXTREC	BW	UPREAD.ZERO64	12	04993	V 03861 01227 1
3014		BW	UPREAD	6	05005	V 03861
3015		BW	UPREAD	6	05011	V 03861
3016		BW	UPREAD	6	05017	V 03861
3017		NOPWM		1	05023	N
3018	SWU1	B	COUNTR	7	05024	J 05202
3019		SW	SW12R.SW22R	11	05031	* 04148 04680
3020		SW	SW17R.SW27R	11	05042	* 04186 04718
3021		SW	SWC1.SWC2	11	05053	* 04199 04731
3022		BCE	*68.SYS1.X	12	05064	B 05083 01256 X
3023		B	NO34B	7	05076	J 05116
3024		SW	SW32R.SW42R	11	05083	* 13272 13814
3025		SW	SW37R.SW47R	11	05094	* 13310 13852
3026		SW	SWC3.SWC4	11	05105	* 13323 13865
3027	NO34B	SW	X5-2.SWU1	11	05116	* 00047 05024
3028		ZA	a950a.X5	11	05127	M 01783 00049
3029		SW	X8-4	6	05138	* 00060
3030		MLCA	-950,X8	12	05144	0 01786 00064 1

T021-2 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 56

074

PGLIN	LABEL	OPCODE	OPERAND	C1	ADDRS	INSTRUCTION
3031		ZA	E9,X14	11	05156	W 01787 00094
3032		MLCA	A01A,WKARIC	12	05167	D 01789 08988 T
3033		S	WKARIO	6	05179	S 06987
3034		S	VVV	ZERO	6	05185 S 08984
3035		SW	PATRNEX5,SWU1	WM TO STOP COMP	11	05191 * 09440 05024
3036	COUNTR	A	212,VVV	STEP COUNT	11	05202 A 01749 08984
3037		A	212,ZRER		11	05213 A 01749 06965
3038		MLNA	ZRER,ZRE		12	05224 D 06965 09958 /
3039		C	VVV,ONE01	SEE IF 100TH. PASS	11	05236 C 08984 01010
3040		BE	*E8	BR EQUAL	7	05247 J 05261 S
3041		B	RRCUT	NEXT REC ALL DRVS	7	05254 J 03794
3042		S	VVV	ZERO	6	05261 S 08984
3043		A	212,WKARID	STEP REC ID NO.	11	05267 A 01749 08988
3044		MLCA	WKARID,CMSG629	MOVE TO MESSAGE	12	05278 D 08988 05874 T
3045		C	WKARID,221A	SEE IF ALL RECS READ	11	05290 C 08988 01791
3046		BU	CLPTRN		7	05301 J 05327 /
3047		S	ZRER		6	05308 S 06965
3048		BE	REWND	BR IF TAPE MARK NOT	7	05314 J 05390 S
3049		H	REWND	DETECTED ON READ	6	05321 * 05390
3050	CLPTRN	CW	PATRNEX5	CLEAR WM FROM PATRN	6	05327 * 09440
3051		A	65,WKARIO	STEP WKARIO	11	05333 A 01792 06987
3052		S	WKARIO,X5	DECREASE X5	11	05344 S 06987 00049
3053		A	WKARIO,X8	STEP COMPARE INDEX	11	05355 A 06987 00064
3054		A	WKARIO,X14	STEP REC LENGTH INDEX	11	05366 A 06987 00094
3055		SW	PATRNEX5	WM TO STOP COMP	6	05377 * 09440
3056		B	RRCUT	NXT REC ALL DRVS	7	05383 J 03794
3057	*	*	REWIND DRIVES	*****	*	
3058	*	*	REWIND DRIVES	*****	*	
3059	*	*	REWIND DRIVES	*****	*	
3060		REWND	CW	SWR161,SWR261	INITIALIZE	11 05390 □ 05510 05536
3061		CW	SWR361,SWR461	SWITCHES	11 05401 □ 05587 05638	
3062		BA1	*E1	RESET INTERLOCK	7 05412 R 05419 H	
3063		BCE	*E7,SYS1613,1	BR IF CH 2 AVAIL.	12 05419 B 05437 01269 1	
3064		CW	NOX2	CLEAR WORD MARK	6 05431 □ 05474	
3065		BCE	*E7,SYS1614,1	BR IF CH 3 AVAIL.	12 05437 8 05455 01270 1	
3066		CW	NOX3	CLEAR WORD MARK	6 05449 □ 05482	
3067		BCE	*E7,SYS1615,1	BR IF CH 4 AVAIL.	12 05455 8 05473 01271 1	
3068		CW	NOX4	CLEAR WORD MARK	6 05467 □ 05490	

T021-2 MULTI-CHANNEL INTERCHANGE TEST

PAGE 57

T021 INSTRUCTION

PGLIN LABEL OPCODE OPERAND

PGLIN	LABEL	OPCODE	OPERAND	C1	ADDR	INSTRUCTION
3069		NOP		1	05473	N 05481 G
3070	NOX2	B#2	*E1	7	05474	X 05481 W
3071		NOP		1	05481	N
3072	NOX3	DCW	33E	1	05482	RESET INTERLOCK
3073		DC	10LK3 G aM4	5	05487	05489
3074		DC		1	05488	
3075	10LK3	NOP		1	05489	N
3076	NOX4	DCW	21A	1	05490	RESET INTERLOCK
3077		DC	10LK4 G aM4	5	05495	05497
3078		DC		1	05496	
3079	10LK4	SW	X10-4	6	05497	* 00070
3080		S	X10	6	05503	S 00074
3081	SWR1	NOPWM		1	05509	N
3082		B	SWR2	7	05510	J 05535
3083		SW	SWR1&1	6	05517	J 05510
3084		BBE	STRWD,CH1E4,W	12	05523	W 05681 01804 W
3085	SWR2	NOPWM		1	05535	N
3086		B	SWR3	7	05536	J 05586
3087		SW	SWR2&1	6	05543	* 05536
3088		BBE	*E8.CH2E4,E	12	05549	W 05568 01842 G
3089		B	SWR3	7	05561	J 05586
3090		ZA	E1,X10	11	05568	W 01793 00074
3091		B	STRWD	7	05579	J 05681
3092	SWR3	NOPWM		1	05586	N
3093		B	SWR4	7	05587	J 05637
3094		SW	SWR3&1	6	05594	* 05587
3095		BBE	*E8.CH3E4,W	12	05600	W 05619 01880 W
3096		B	SWR4	7	05612	J 05637
3097		ZA	E2,X10	11	05619	M 01744 00074
3098		B	STRWD	7	05630	J 05681
3099	SWR4	NOPWM		1	05637	N
3100		B	RDSUMM	7	05638	J 05901
3101		SW	SWR4&1	6	05645	* 05638
3102		BBE	*E8.CH4E4,W	12	05651	W 05670 01918 G
3103		B	RDSUMM	7	05663	J 05901
3104		ZA	E3,X10	11	05670	M 01794 00074
3105	STRWD	MLCS	00E,RWDXE3	12	05681	D 01761 05755 3
3106		MLCS	CHEPXE10,RWDXE1	12	05693	D 03R00 05753 3

T021-2 MULTI-CHANNEL INTERCHANGE TEST

74

PAGE 58

PCLIN LABEL OP CODD OPERAND

CT ADDRS INSTRUCTION

PCLIN	LABEL	OP CODD	OPERAND	CODES				
3107	MLCS	TANBX10.BAYX			12	05705	D	09R08 05764 3
3108	MLCS	TANBX10,BCBX		BR BUSY	12	05717	D	09R08 05757 3
3109	STPMOD	SH RWDX63		STEP	6	05729	*	05755
3110		A 61.RWDX63		DRIVE	11	05735	A	01793 05755
3111		CW RWDX63		NUMBER	6	05746	□	05755
3112	RWDX	RWD 11		REWIND	5	05752	U	ZUI R
3113	BCBX	BCB1 RWDX			7	05757	R	05752 2
3114	BAYX	BA1 *C1			7	05764	R	05771 G
3115		BCE SWR1.RWDX63.9		NEXT CH IF A 9	12	05771	B	05509 05755 9
3116		B STPWD		NEXT DRIVE	7	05783	J	05729
3117	*	*****		*****				
3118	*	*****		COMPARE ROUTINE				
3119	*	*****		*****				
3120	CMPRUT	SBR CMPRET5		STORE BAR	7	05790	G	05893 B
3121	CMPREC	C 06X8.PATRN6954		COMPARE RECORD	11	05797	C	00.00 09954
3122		BE CMPRET		BR EQUAL	7	05808	J	05888 S
3123	CMPCNT	A 61.000006X15		ADD 1 TO COMP CNT	11	05815	A	01793 00MM0
3124		BCE TSTH.JAD0.1		BY-PASS TYPE IF A 1	12	05826	B	05876 01000 1
3125		B TYP1		COMP ERROR MSG	7	05838	J	01087
3126	CMSG	DCW @COMP ERROR TD REC ID.NO. 0.G			30	05845		
3127	TSTH	BCE *68.TAD2.1			12	05876	B	05895 01002 1
3128	CMPRET	B 0		RETURN	7	05888	J	00000
3129		H CMPRET		HALT	6	05895	*	05888
3130	*	*****		*****				
3131	*	*****		TYPE ERROR SUMMARY				
3132	*	*****		*****				
3133	ROSUMW	B TYP1			7	05901	J	01087
3134		DCW ATCH TDR TEMP PERM COMP&G			22	05929		
3135		CW SWXR1,SWXR2			11	05931	□	05978 06083
3136		CW SWXR3			6	05942	□	06147
3137		SW X7-4,X8-4			11	05948	*	00055 00060
3138	BEGNER	S X8			6	05959	S	00064
3139		S			1	05965	S	
3140	STPREC	A 64.X8 NOPWM		SWITCH	11	05966	A	01752 00064
3141		SWXR1 8 SWXR2-1			1	05977	N	
3142		BCE STPR1,CH16X8,		BR IF LAST DR CH 1	7	05978	J	06082
3143					12	05985	B	06069 01Q00

TO21-2 MULTI-CHANNEL INTERCHANGE TEST

PGLIN	LABEL	OPCOD	OPERAND	CT	ADDRS	INSTRUCTION
3144		BW	ADD23.CH1EX8	STEP INDEX TO NEXT DRIVE	12	05997 V 06051 01Q00 1
3145		MRCWG	RD11EX7.ERLINE	MOVE ERROR SUMMARY	12	06009 D 02YH9 06028 L
3146	TYPSUM	B	TYP1	TYPE SUMMARY LINE	7	06021 J 01087
3147	ERLINE	DCW	a	a.G	22	06028
3148	ADD23	A	E23,X7	STEP TO NEXT DRIVE	11	06051 A 01748 00059
3149		B	SPREC	NEXT DRV SUMMARY	7	06062 J 05966
3150	STPR1	SW	SWXR1		6	06069 * 05978
3151		B	BEGNER	NEXT CH	7	06075 J 05959
3152		NOPWM			1	06082 N
3153	SWXR2	B	SWXR3-1		7	06083 J 06146
3154		BCE	SPPR2.CH2EX8.	BR AFTER LAST DRV	12	06090 B 06133 01Q38
3155		BW	ADD23.CH2EX8	STEP INDEX TO NEXT DRIVE	12	06102 V 06051 01Q38 1
3156	MRCWG	RD21EX7.ERLINE		MOVE ERROR SUMMARY	12	06114 D 03+I6 06028 L
3157		B	TYPSUM	CHANNEL 2 TYPE	7	06126 J 06021
3158	STPR2	SW	SWXR2		6	06133 * 06083
3159		B	BEGNER	NEXT CH	7	06139 J 05959
3160		NOPWM			1	06146 N
3161	SWXR3	B	SWXR4		7	06147 J 06210
3162		BCE	SPPR3.CH3EX8.	BR AFTER LAST DRV	12	06154 B 06197 01Q76
3163		BW	ADD23.CH3EX8	STEP INDEX TO NEXT DRIVE	12	06166 V 06051 01Q76 1
3164	MRCWG	RD31EX7.ERLINE		MOVE ERROR SUMMARY	12	06178 D 03TM3 06028 L
3165		B	TYPSUM	CHANNEL 3 TYPE	7	06190 J 06021
3166	STPR3	SW	SWXR3		6	06197 * 06147
3167		B	BEGNER	NEXT CH	7	06203 J 05959
3168	SWXR4	BCE	INTCG.CH4EX8.	BR AFTER LAST DRV	12	06210 B 06253 01R14
3169		BW	ADD23.CH4EX8	STEP INDEX TO NEXT DRIVE	12	06222 V 06051 01R14 1
3170	MRCWG	RD41EX7.ERLINE		MOVE ERROR SUMMARY	12	06234 D 03VAO 06028 L
3171		B	TYPSUM	CHANNEL 4 TYPE	7	06246 J 06021
3172	INTCG	BCE	RDHSKP.TAD3.1	REPEAT PASS FOR M-CH	12	06253 B 02466 01003 1
3173		MLNA	NXTST.6	SET UP BRANCH TO NEXT TEST	12	06265 D 01962 00006 /
3174		B	TYP1		7	06277 J 01087
3175	*****		CHANGE ABOVE INST TO J00400 FOR AUTOMATIC			
3176	*****		BRANCH TO NEXT TEST AT END OF READ PASS			
3177		DCW	a	INTERCHANGE TAPE.1	17	06300
3178		B	TYP1		7	06302 J 01087
3179		DCW	a	PRESS START TO RE-READ OR COMPUTER	35	06343
3180			a	RESET AND START TO GO NEXT TEST. G	32	06375

PCLIN

LABEL

OPCODE

OPERAND

INSTRUCTION

3181		NOP		1	06377	N
3182	H	RDHSKP		6	06378	* 02466
3183	*	*****				
3184	*	*****	READ ERROR ROUTINE			
3185	*	*****				
3186	RDERRT	SBR	RET5	7	06394	G 06657 B
3187		SBR	RETR265	7	06391	C 06717 B
3188	B	CHSTT		7	06398	J 01290
3189	MLCA	INDIC,MSGEX610	RESET ERROR MSG	12	06405	D 08993 06548 T
3190	BNR1	*613		7	06417	R 06436 1
3191	MLCS	a a.MSGEX66		12	06424	D 01795 06544 3
3192	BER1	*613		7	06436	R 06455 4
3193	MLCS	a a.MSGEX67		12	06443	D 01795 06545 3
3194	BEF1	*613		7	06455	R 06474 8
3195	MLCS	a a.MSGEX68		12	06462	D 01795 06546 3
3196	BNT1	*613		7	06474	R 06493 B
3197	MLCS	a a.MSGEX69		12	06481	D 01795 06547 3
3198	BWL1	*613		7	06493	R 06512 -
3199	MLCS	a a.MSGEX610		12	06500	D 01795 06548 3
3200	BEX1	*613, /	TYPE ON INDIC. 1 OR A	7	06512	R 06531 /
3201	BCE	WORRR,TAD0,1	TIMEOUT TAD	12	06519	B 06555 01000 1
3202	B	TYP1		7	06531	J 01087
3203	MSGEX	DCW		16	06538	
3204	WORRR	BCE	*68,TAD2,1	12	06555	B 06574 01002 1
3205	B	*62		7	06567	J 06575
3206	H		HALT	1	06574	*
3207	RERRT	BCE	REWND,MSGEX68,8	12	06575	B 05390 06546 8
3208	BCE	DRFINR,MSGEX66,1	BR- NOT READY	12	06587	B 06629 06544 1
3209	BCE	NFOILR,MSGEX67,4	- DATA CHECK	12	06599	B 06659 06545 4
3210	A	MZN,MSGEX610,B	- W.L.R.	12	06611	B 06941 06548 B
3211	HALTR1	H	DRFINR6	6	06623	* 06635
3212	DRFINR	SW	06X1	6	06629	* 00040
3213	SW	X6-4	MARK DRIVE OUT OF TEST	6	06635	* 00050
3214	ZA	37a,X6		11	06641	H 01796 00054
3215	RETR	B	06X6	7	06652	J 0040
3216	NFOILR	A	31a,XXX	11	06659	A 01749 08981
3217	BCE	SETPRM,XXX,0	BR IF 9TH. RE-READ	12	06670	B 06719 08981 0
3218	TEMPR	A	61,000000X15	11	06682	A 01793 00MNO

1021-2 MULTI-CHANNEL INTERCHANGE TEST

C 79

1021

PAGE 61

PGIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
3219		BSP	11		5	06693 U ZUL 8
3220		BC01	*--11		7	06698 R 06693 2
3221		BA1	*E1	1	7	06705 R 06712 M
3222	RETR2	B	0		7	06712 J 00000
3223	SETPRM	MLCS	TEMPR10, SUBTR&10 MOVE TEMP ADDRS LOC	12	06719 D 06692 06745 3	
3224		MLCS		1	06731 D	
3225		MLCS			1	06732 D
3226		MLCS			1	06733 D
3227		MLCS			1	06734 D
3228	SUBTRR.	S	090.00000 SUB PERM CNT FROM TEMP	11	06735 S 01797 00000	
3229	PERMR	A	61.00000E+15 ADD 1 TO PERM ERR COUNT	11	06746 A 01793 00MMO	
3230		DRFINR	8	7	06757 J 06629	
3231	*	*****	CHECK LOAD MODE ANY MISSING WMKS *****			
3232	*	*****	CHECK LOAD MODE ANY MISSING WMKS *****			
3233	*	*****	*****			
3234	CHKLM	SBR	RFLMCK65	7	06764 G 06904 B	
3235		MLCS	CMPREC5, BONWMG10 ADDRS OF LAST CHAR	12	06771 D 05802 06842 3	
3236		MLCS		1	06783 D	
3237		MLCS		1	06784 D	
3238		MLCS		1	06785 D	
3239		MLCS		1	06786 D	
3240		MLCS	CMPREC5, CWMK5E5 IN READ AREA	12	06787 D 05802 06929 3	
3241		MLCS		1	06799 D	
3242		MLCS		1	06800 D	
3243		MLCS		1	06801 D	
3244		MLCS		1	06802 D	
3245		S	WKARI3 ZERO COUNT	6	06803 S 06984	
3246	SPWMCK	A	#10. WKARI3 STEP COUNT BY 1	11	06809 A 01749 06984	
3247	BRONL	BCE	CWMKS, WKARI3, 6 BR ON 6 TH. LOOP	12	06820 B 06924 06984 6	
3248	BONWM	BW	STBAR, 00000 BR ON WMK	12	06832 V 06906 00000 1	
3249		NOP		1	06844 N	
3250		B	TYP1	7	06845 J 01087	
3251	LMSG	DCW	ALLOAD MODE FAILED CH. & G HALT IAD	21	06872	
3252		BCE	*#8. IAD2, 1	12	06874 B 06893 01002 1	
3253		B	CWMKS	7	06886 J 06924	
3254		H	CWMKS HALT & BR TO CLEAR WORD MARKS	6	06893 * 06924	
3255	RFLMCK	B	O	7	06899 J 00000	

T021-2 MULTI-CHANNEL INTERCHANGE TEST

1021 PAGE 02

PCLIN LABEL OPCODE OPERAND

PCLIN	LABEL	OPCODE	OPERAND	CY	ADDR	INSTRUCTION
32256	STBAR	S	312,BONWME10		11	06906 S 01749 06842
32257		B	SPWMCK		7	06917 J 06809
32258	CWNKS	CH	00000		6	06924 D 00000
32259		CH			1	06930 D
32260		CH			1	06931 D
32261		CH			1	06932 D
32262		CH			1	06933 D
32263		B	RFLMCK		7	06934 J 06899
32264	WZM	MLCB	06X14,ZMS		12	06941 D 00M.0 06972 L
32265		B	TYP1		7	06953 J 01087
32266		DCW	AR 3		2	06961
32267	ZRER	DCW	0000003		4	06965
32268		DC	3 3		1	06966
32269		DCW	AW 3		2	06968
32270		DCW	A.G		4	06972
32271		B	RETTR2		7	06974 J 06712
32272	WKARI1	DCW	0000A		3	06983
32273	WKARI3	DCW	3 3		1	06984
32274	WKARI0	DCW	00003		3	06987
32275		LIORG	1722 STORE LITERALS BELOW 2000		01722	
32275			ABA		1	01722
32275			AAC		1	01723
32275			AM2		1	01724
32275			ALA		1	01725
32275			RETTR2		5	01730 06712
32275			RDEERRT		5	01735 06384
32275			A2G		1	01736
32275			A2A		1	01737
32275			ASS		1	01738
32275			AKG		1	01739
32275			A2G		1	01740
32275			AGA		1	01741
32275			AGG		1	01742
32275			AKA		1	01743
32275			A.G		2	01746
32275			E2		2	01748
32275			0362A		1	01749
32275			E23			
32275			31A			

T021-2 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 63

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDR	INSTRUCTION
3275		0460		2	01751	
3275		E4		1	01752	
3275		0230		2	01754	
3275		0RA		1	01755	
3275		0069090		5	01760	
3275		006		1	01761	
3275		020		1	01762	
3275		0X0		1	01763	
3275		0079990		5	01768	
3275		030		1	01769	
3275		0159990		5	01774	
3275		040		1	01775	
3275		0169990		5	01780	
3275		09500		3	01783	
3275		-950		3	01786	
3275		E9		1	01787	
3275		0010		2	01789	
3275		0210		2	01791	
3275		E5		1	01792	
3275		E1		1	01793	
3275		E3		1	01794	
3275		04		1	01795	
3275		070		1	01796	
3275		090		1	01797	
3276	*	*****	END OF TEST *****			
3277	*	*****	LOCATION OF CH 3 & 4 READ ROUTINES.			
3278	*	*****	BALANCE OF CARDS REMOVED FROM DECK			
3279		ORG	13000		13000	
3280	*	*****	CHANNEL THREE READ			
3281	*	*****	BR IF NO READY			
3282	*	*****	DRIVES ON CHAN 3			
3283	CH3R	NOPWM		1	13000	N
3284		B	PS33R	7	13001	J 13015
3285		B	SW33R-13	7	13008	J 13034
3286	PS33R	CW	ZERO63	6	13015	B 01226
3287		SW	SW33R	6	13021	* 13047
3288		B	CH4R	7	13027	J 13542

T021-2 MULTI-CHANNEL INTERCHANGE TEST

PGLIN LABEL OPCODE OPERAND

PGLIN	LABEL	OPCODE	OPERAND	CT	ADDRS	INSTRUCTION
3289		BW	SWC367.CH3-46X1	BR- DRV OUT OF TEST	12	13034 V 13330 018X2 1
3290		NOPWM			1	13046 N
3291	SW33R	B	SWC367	BR FIRST TIME SWITCH	7	13047 J 13330
3292		NOP			1	13054 N
3293	I3R2	DCW	aJa		1	13055
3294		DC	I3R2		5	13060 13055
3295		DC	3	BRANCH	1	13061
3296		DCW	a3a		1	13062
3297		DC	I3R1	ANY	5	13067 13076
3298		DC	aMa	ERROR	1	13068
3299		B	NOERR3	BR IF NO ERRORS	7	13069 J 13205
3300	I3R1	MLCS	READ32E3.MSGEX615	DR AND CH NO	12	13076 D 13436 06553 3
3301		MLCS	a3a	TO ERROR MSG	6	13088 D 14092
3302		MLCS	READ32E1.CHCODE	SET UP	12	13094 D 13434 01692 3
3303		MLCS	a3a,CHSTAT	CH ALTER	12	13106 D 14092 01693 3
3304		MLCS	READ32E3.TCNO	ROUTINE	12	13118 D 13436 01708 3
3305		MLNA	C3.DRFINRES	ERROR ROUTINE	12	13130 D 01172 06634 /
3306		MLNA	TM3.TMPRE10	ADDRESSES FOR	12	13142 D 01977 06692 /
3307		MLNA	PM3.PERMMRC10	CH THREE	12	13154 D 01192 06756 /
3308		MLNA	a16954a.M2M65		12	13166 D 14097 06946 /
3309		SW	SW35R	RE-READ SWITCH	6	13178 * 13535
3310		B	RDEERR	BR- ERROR ROUTINE	7	13184 J 06384
3311		B	CLR3	BR TO READ	7	13191 J 13385
3312		B	XXXR3	AROUND COMP ON ERROR	7	13198 J 13336
3313	NOERR3	MLNA	RD3.CMPRECES	COMP ROUT	12	13205 D 08975 05802 /
3314		MLNA	CP3.CMPCNT10	ADDRESSES	12	13217 D 01212 05825 /
3315		MLCS	READ32E3.CMSG615		12	13229 D 13436 05860 3
3316		MLCS	a3a		6	13241 D 14092
3317		MLCS	a3a,LMSG	CH NO TO LM CHK MSG	12	13247 D 14092 06872 3
3318		MLCS	a0a,XXX	ZERO ERROR COUNT	12	13259 D 14098 08981 3
3319		NOP		SWITCH ARND	1	13271 N
3320	SW32R	B	SW37R-1	IDENT MOVES	7	13272 J 13309
3321		MLCB	RAREA3E1.RD3161EX15		12	13279 D 16001 03CM4 L
3322		MLCS	READ32E3.RD3165EX15		12	13291 D 13436 03CM8 3
3323		MLCS	a3a		6	13303 D 14092
3324		NOP		LOAD MODE CHECK SWITCH	1	13309 N
3325	SW37R	BCE	CHKLM,TAD6.1	BR TO LM CHK ROUT	12	13310 B 06764 01006 1
3326		NOP			1	13322 N

PGLIN	LABEL	OPCOD	OPERAND	CT ADDRS	INSTRUCTION
3327	SWC3	B	CMPRT	7	J 05790
3328		CW	SW33R	6	13330 A 13047
3329	XXXR3	BCE	PS33R.CH3EX1.	12	13336 B 13015 018X6
3330		BW	CH4R.CH3EX1	12	13348 V 13542 018X6 1
3331		MLCS	CH3EX1.READ3Z63	12	D 018X6 13436 3
3332	INQ4	BNQ	ITR	7	J 01011 Q
3333		CW	SW35R	6	13379 D 13535
3334	CLR3	CS	RAREA3&954	6	13385 / 16954
3335		CS		1	13391 /
3336		CS		1	13392 /
3337		CS		1	13393 /
3338		CS		1	13394 /
3339		CS		1	13395 /
3340		CS		1	13396 /
3341		CS		1	13397 /
3342		CS		1	13398 /
3343		CS		1	13399 /
3344		MLCWS	WMGM.RAREA3&X14	12	D 01007 16M:0 7
3345		SW	RAREA3	6	13400 D 01007 16M:0 7
3346		NOP		1	13418 N
3347	SL3	DCW	AJA	1	13419
3348		DC	SL3	5	13424 13419
3349		DC	3	1	13425
3350	LOOPR3	DCW	@32	1	13426
3351		DC	READ3Z	5	13431 13433
3352		DC	AMG	1	13432
3353	REAC3Z	DCW	AMMB1@	4	13433
3354		DC	RAREA3	5	13441 16000
3355		DC	AR@	1	13442
3356		NUPWM		1	13443 N
3357	BOLR3	DCW	@J@	1	13444
3358		DC	DLCK3	5	13449 13522
3359		DC	3	1	13450
3360		DCW	@3@	1	13451
3361		DC	READ3Z	5	13456 13433
3362		DC	2	1	13457
3363		DCW	@3@	1	13458
3364		DC	CHAR	5	13463 13542

T021-2 MULTI-CHANNEL INTERCHANGE TEST

CT ADDRS INSTRUCTION

PGLIN	LABEL	OPCODE	OPERAND	CT	ADRS	INSTRUCTION
3365		DC	1	1	13464	
3366		BCE	OLOK3,TAD4,1	12	13465	BR IF NOT USING OLAP
3367		BCE	DNBR3,SYSLT7,1	12	13477	BR-IF OLAP AVAIL
3368		B	OLCK3	7	13489	BR-IF OLAP NOT AVAIL
3369		DNBR3	B	7	13496	J 01087
3370		DCW	AD1ONT BR CLAP CH 3a,6	18	13520	
3371		BCE	INC3,TAD1,1	12	13522	LOOP TAD
3372		NOPWM	B	1	13534	N
3373		SW35R	B	7	13535	J 13054
3374	*		13R2-1			RE-READ
3375	*					CHANNEL FOUR READ
3376						*****
3377		CH4R	NOPWM	1	13542	N
3378		B	PS44R	7	13543	J 13557
3379		B	SH43R-13	7	13550	J 13576
3380		PS44R	CW	6	13557	□ 01227
3381		SW	ZERDE4	6	13563	• 13589
3382		SW	SW43R	7	13569	J 04993
3383		B	NXTREC	12	13576	V 13872 019/0 1
3384		BW	SWC4E7,CH4-4EX1			BR- DRV OUT OF TEST
3385		NOPWM	B	1	13588	N
3386		SW43R	SWC4E7	7	13589	J 13872
3387		DCW	NOP	1	13596	N
3388		I4R1	DC	1	13597	
3389		DC	I4R1	5	13602	13597
3390		DCW	4	1	13603	
3391		DC	I4R2	1	13604	
3392		DC	I4R2	5	13609	13618
3393		B	NOERR4	1	13610	
3394		I4R2	MLCS	7	13611	J 13747
3395		MLCS	READ4ZC1,CH-CODE	12	13636	BR IF NO ERRORS
3396		MLCS	SET UP	12	13618	0 13978 06453 3
3397		MLCS	CH ALTER	12	13648	MLNA
3398		MLCS	ROUTINE	12	13660	D 13978 01708 3
3399		MLNA	READ4ZC3,MSGEXC15	12	13672	MLNA
3400		MLNA	DRF INREGS	12	13684	MLNA
3401		MLNA	TEMPREL0	12	13696	MLNA
3402		MLNA	FOR CH 4	12	13708	MLNA

T021-2 MULTI-CHANNEL INTERCHANGE TEST

T021 PAGE 67

CT ADDRS INSTRUCTION

PGLIN	LABEL	OPCODE	OPERAND	RE-READ SWITCH	6	13720	*	14077
3403		SW	SW45R	BR- ERROR ROUTINE	7	13726	J	06384
3404		B	RDEERR	BR TO READ	7	13733	J	13927
3405		B	CLR4	AROUND COMP ON ERROR	7	13740	J	13878
3406		B	XXXR4	COMP ROUT	12	13747	D	08980 05802 /
3407	NOERR4	MLNA	RD4.CMPREC65	ADDRESSES	12	13759	D	01217 05825 /
3408		MLNA	CP4.CMPCNT10		12	13771	0	13978 05860 3
3409		MLCS	READ4Z63.CMSG615		6	13783	0	14099
3410		MLCS	@42	CH NO TO LM CHK MSG	12	13789	D	14099 06872 3
3411		MLCS	@42.LMMMSG	ZERO ERROR COUNT	12	13801	D	14098 08981 3
3412		MLCS	@02,XXX	SWITCH ARND	1	13813	N	
3413		NOP		SW47R-1 IDENT MOVES	7	13814	J	13851
3414	SW42R	B	RAREA461.RC41616X15		12	13821	D	17001 03EA1 L
3415		MLCB			12	13833	D	13978 03EA5 3
3416		MLCS	READ4Z63.RC41656X15		6	13845	D	14099
3417		MLCS	@42	LOAD MODE CHECK SWITCH	1	13851	N	
3418		NOP		CHKLM,TAD6,1 BR TO LM CHK ROUT	12	13852	B	06764 01006 1
3419	SW47R	BCE	CHKLM,TAD6,1		1	13864	N	
3420		NOP		BR TO COMPARE ROUT	7	13865	J	05790
3421	SWC4	B	CMPRT		6	13872	D	13589
3422		CW	SW43R	BR-ALL DRIVES READ	12	13878	B	13557 019/4
3423		BCE	PS44R,CH4&X1,	-DRIVE OUT OF TEST	12	13890	V	04993 019/4 1
3424		BW	NXTREC,CH4&X1	DR NO TO READ	12	13902	D	019/4 13978 3
3425		MLCS	CH4&X1.READ4Z63	INQUIRY REQUEST	7	13914	J	01011 Q
3426	INQ3	BNQ	ITR	DONT RE-READ	6	13921	D	14077
3427		CW	SW45R	CLEAR READ AREA	6	13927	/	17954
3428		CLR4	CS RAREA4&954		1	13933	/	
3429		CS	**		1	13934	/	
3430		CS	**		1	13935	/	
3431		CS	**		1	13936	/	
3432		CS	**		1	13937	/	
3433		CS	**		1	13938	/	
3434		CS	**		1	13939	/	
3435		CS	**		1	13940	/	
3436		CS	**		1	13941	/	
3437		CS	**		12	13942	D	01007 17M.0 7
3438		MLCWS	WMGM,RAREA4&X14	DEFINE RECORD LENGTH	6	13954	*	17000
3439		SW	RAREA4	SWITCH	1	13960	N	
3440				NOP				

T021-2 MULTI-CHANNEL INTERCHANGE TEST

PGLIN	LABEL	OPCODE	OPERAND	WAIT IF	
3441	SL4	DCW	0J6	SCOPE	1 13961
3442		DC	SL4	LOOP	5 13966 13961
3443	LOOPR4	DCW	4		1 13967
3444		READ4Z	DCW		1 13968
3445		G	0MA		5 13973 13975
3446	READ4Z	DC	0MA	READ	1 13974
3447		DC	AM.B1A	TAPE	4 13975
3448	RAREA4	DCW	RAREA4		5 13983 17000
3449		DC	0RA6		1 13984
3450		NOPWM			1 13985 N
3451	BOLR4	DCW	0J6	BR-OLAP	1 13986
3452		DC	0LOK4		5 13991 14064
3453		DC	4	BRANCH	1 13992
3454		DCW	01A	BUSY	1 13993
3455		DC	READ4Z		5 13998 13975
3456		DC	2	BRANCH	1 13999
3457		DCW	01A	NOT READY	1 14000
3458		DC	NXTREC		5 14005 04993
3459		DC	1		1 14006
3460		BCE	0LOK4.TAD4.1	BR IF NOT USING OLAP	12 14007 B 14064 010
3461		BCE	DNBR4.SYS167.1	BR-IF OLAP AVAIL	12 14019 B 14038 01
3462		B	0LOK4	BR-IF OLAP NOT AVAIL	7 14031 J 14064
3463	DNBR4	B	TYP1		7 14038 J 01087
3464		DCW	ADIONT BR OLAP CH 43.G		18 14062
3465	CLOK4	BCE	INC4.TAD1.1	LOOP TAD	12 14064 B 13372 01
3466		NOPWM			1 14076 N
3467	SW45R	B	I4R1-1	RE-READ	7 14077 J 13596
3468		B	NXTREC		7 14084 J 04993
3469		H			1 14091 *
3470		END	2000		J02000
3470		036			1 14092
3470		0169543			5 14097
3470		006			1 14098
3470		046			1 14099
3470		016			1 14100
3470		016			5 14105