

Matrox® Application Notes

Matrox® KVM Mouse Driver Installation

Software version 3.03

20327-401-0100
January 25, 2022

www.matrox.com/video


matrox®

Installing the KVMMouse Driver

To install the KVMMouse driver, follow the steps below:


- 1 Make sure your Extio system is in **Aggregator** mode.
- 2 Download the KVMMouse driver from the [Matrox website](#) and save the driver to your computer.
- 3 From your **Start** menu, go to **Device Manager**.
- 4 Expand **Mice and other pointing devices**.

If you have more than one device listed (if not, proceed to Step 5), you must determine which one to update. To do so, select **Properties > Details**, then from the **Property** list, click **Hardware Ids**.

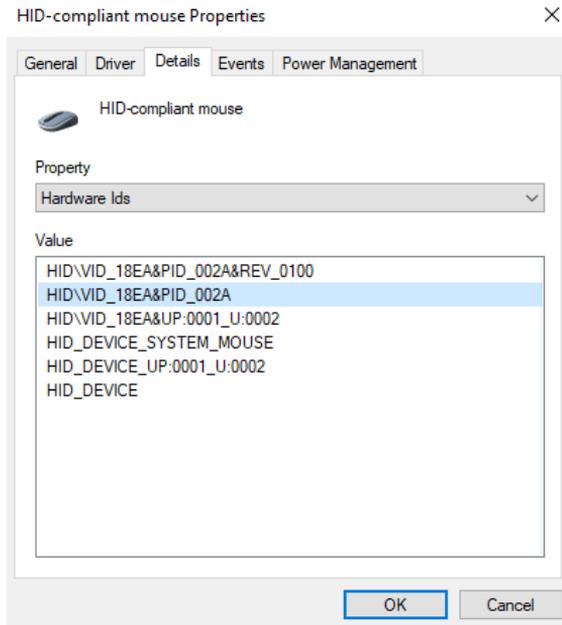


If you see the value “HID\VID_18EA&PID_002A” listed, then you are updating the correct mouse device.


- 5 When you know which device to update (or if only one is listed), right-click on the device and select **Update driver**.

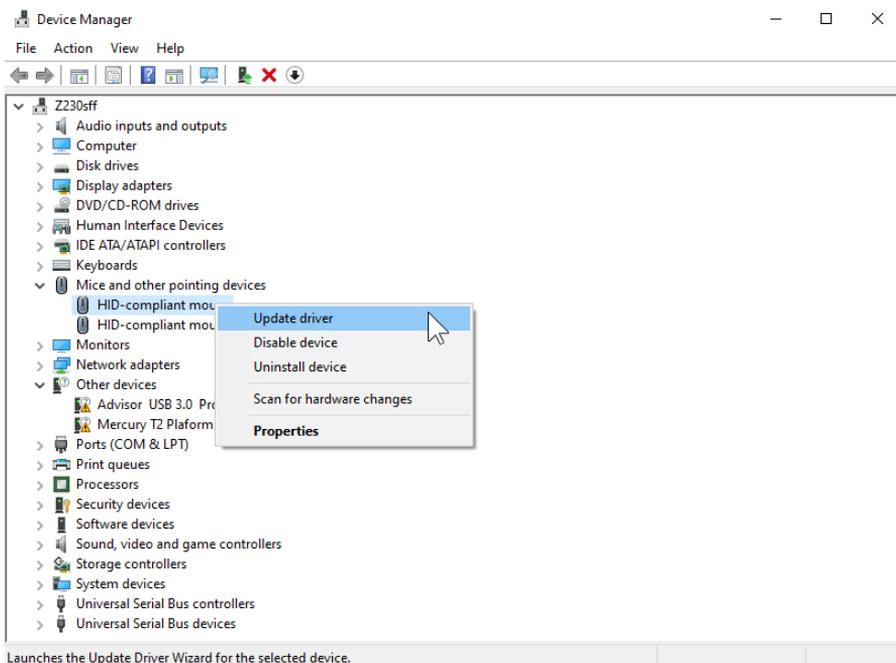


- 6 Click **Browse my computer for drivers**.

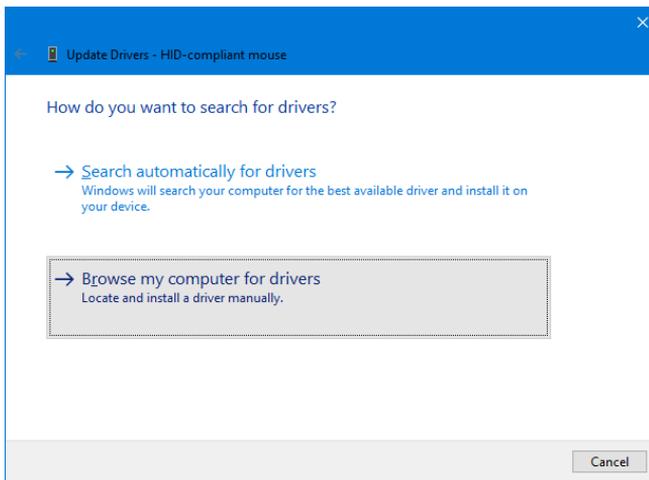


7 Click **Let me pick from a list of available drivers on my computer.**

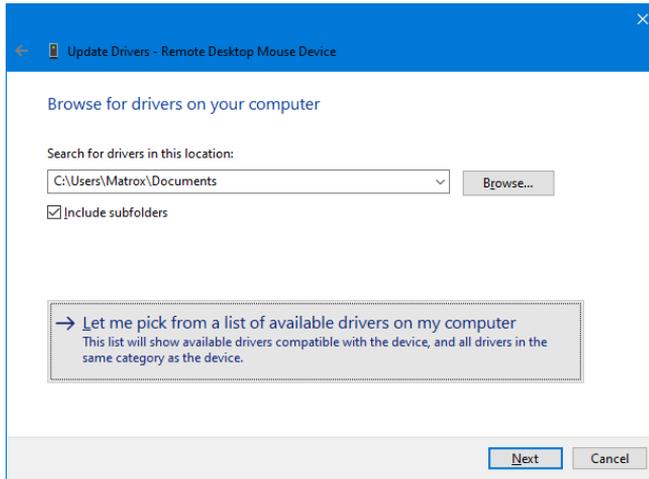


8 Click **Have Disk.**

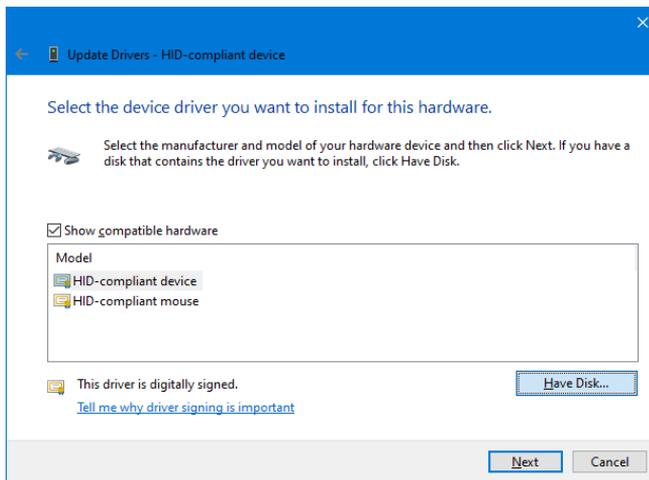

9 Click **Browse.**

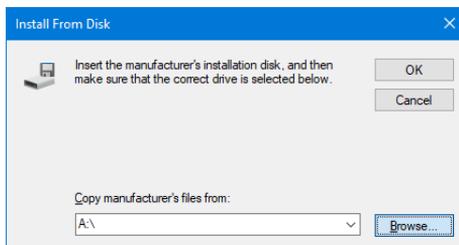

- 10 Browse to the folder on your computer where you saved the driver in step 2 (*KVMMouse.inf*).

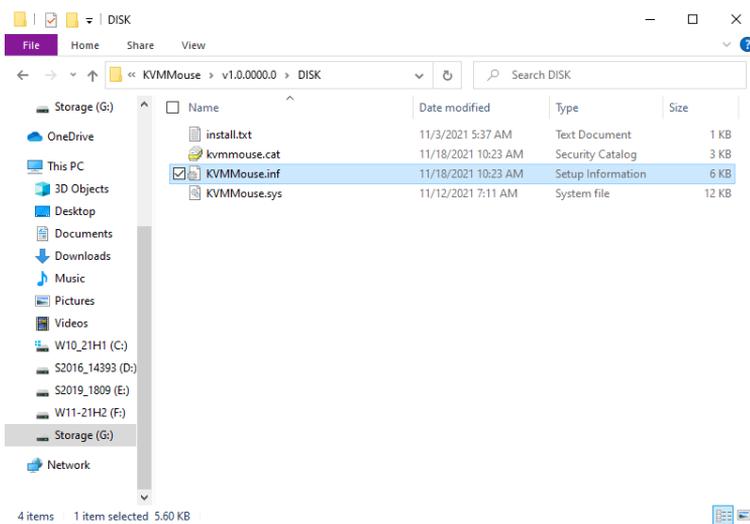


- 11 Select the driver, then click **Next** to continue with the installation.

Windows will display a confirmation message that the KVMMouse driver is installed.

Uninstalling the KVM Mouse Driver

To uninstall the KVM Mouse driver, follow the steps below:

- 1 From your **Start** menu, go to **Device Manager**.
- 2 Expand **Mice and other pointing devices**.
- 3 Right-click on the **KVM USB Mouse** and select **Uninstall device**.

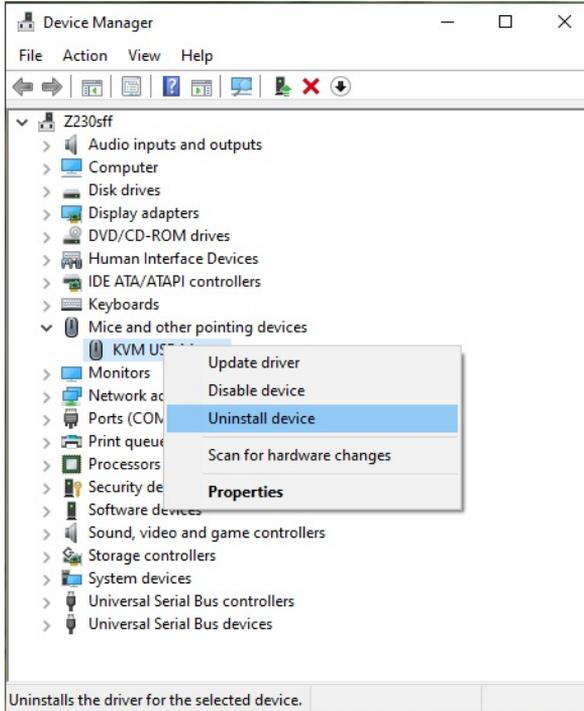


- 4 Select **Delete the driver software for this device** then click **Uninstall**.



Windows will uninstall the KVMMouse driver, but you will lose access to your mouse.

- 5 To regain access to your mouse, press **Scroll Lock** on your keyboard to open the Extio RX OSD, then disconnect and reconnect your aggregation.

Windows will detect your mouse and it will work with the “HID-compliant mouse” default driver.

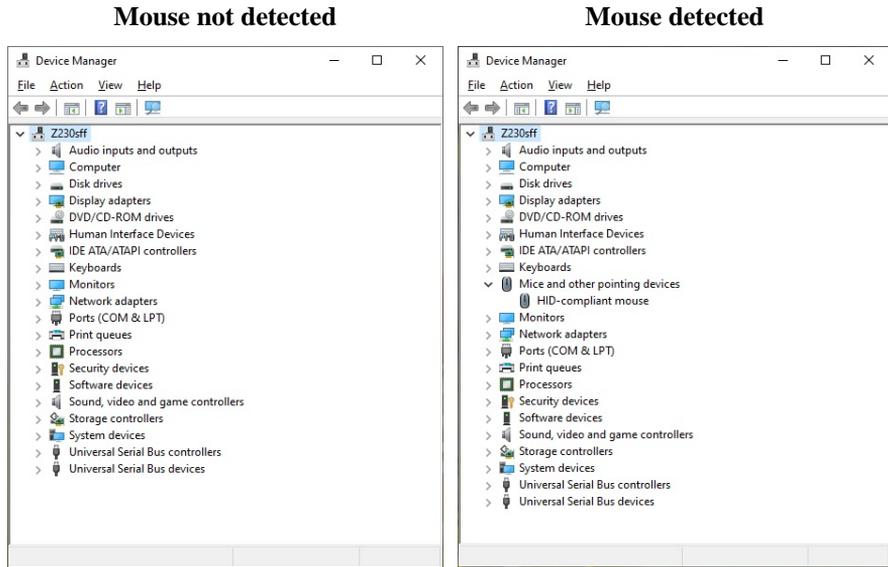

The KVMMouse driver is successfully uninstalled.

Contact us

The Matrox web site has product literature, press releases, technical material, a sales office list, trade show information, and other relevant material. Visit us at <http://www.matrox.com/video>.

If you have any questions or comments about our products or solutions, contact us at www.matrox.com/video/contact.

Matrox values your business and offers professional support for your Matrox product. For more information, contact your Matrox representative or our technical support at kvmsupport@matrox.com.

Disclaimer

Information in this document may contain technical inaccuracies or typographical errors. Information may be changed or updated without notice. Matrox reserves the right to make improvements and/or changes in the products, programs and/or specifications described in this information at any time without notice. All trademarks and trade names, service marks and logos referenced herein belong to their respective owners.

Copyright © 2022 Matrox is a trademark of Matrox Electronic Systems Ltd. All rights reserved.

Matrox Graphics Inc.

1055 Saint Regis Boulevard video@matrox.com
Dorval, Quebec, Canada www.matrox.com/video
H9P 2T4

(514) 822-6000

matrox[®]
Graphics for Professionals