保

Artificial Intelligence Project--RLE and MIT Computation Center

Memo 30 (Revised)--

THE COLUMN THE PARTY OF

by D. J. Edwards and T. F. Bert

Gereber 28, 1963

(This memo is a revised version of the Pres Paris (37) Algorithm, AI Hemo 30 December 4, 1961.)


The α-β Heuristic

by D. J. Edwards and T. P. Hart

The α - β beuristic is a method for pruning unneeded branches from the move tree of a game. The algorithm makes use of information gained about part of the tree to reject those branches which will not affect the principle variation.

The reasoning behind the α - β heuristic is as follows:

- a) if the maximizing-player finds a move whose value is greater than or equal to the value of an alternate minimizing-player move found higher in the tree, he should not look further because the min-player would certainly take that alternate move.
- b) if the min-player finds a move whose value is less than or equal to the value of an alternate max-player move found higher in the tree, he should not look further because the max-player would certainly take that alternate move.



Case (b) may be illustrated by the above piece of tree. The maxplayer has investigated the branch with value α and has looked at an alternate move from the point at which this branch was found. At the time the

value v is established the maximizing player (whose point of view we are taking) sees that if he takes the right branch from the top node he is giving the other player the opportunity to take the v branch. But this will result in his getting v or less, and since he can get α by taking the left branch, he instantly decides that he won't make the move to the right under any circumstance.

The following definitions express the α - β heuristic:

 $vmax[pos;\alpha;\beta] = [if final[pos;\alpha;\beta] then evaluate[pos]$ else $vlmax[succ[pos];\alpha;\beta]]$

8]]

vlmin[lis;α;β] = [if null[lis] then β

else if vmax[car[lis];α;β] ≤ α then α

else vlmin[cdr[lis];

Q:

min[vmax[car[lis];x;\b];\b]]]

where

pos stands for some representation of the current position.

lis is a list of position representations.

succ[pos] is a function which produces a list of positions which can be reached in one move from pos.

 $final[pos;\alpha;\beta]$ is a predicate which may decide that the search is not to continue, e.g., when the end of the game has been reached.

evaulate[pos] provides some measure of goodness of the position (always

from the point of view of maximizing player).

 α and β are initially set at -00 and +00 respectively.

This heuristic may readily be compared with a minimax search by observing that if the second clauses in the conditional expression for <u>vlmax</u> and <u>vlmin</u> are eliminated the resulting function is just minimax.

It is important to note that the ordering of the list of moves generated by succ is very important. The most gain is achieved from the heuristic when the right move is at the beginning of the list.

It turns out that at best, that is, in the case of perfect ordering the α - β heuristic can cut a tree's exponential growth rate in half, thus allowing almost twice the search depth for the same effort. More precisely, we have the following theorem.


Theorem (Levin): Let n be the number of plies in a tree, and let b be the number of branches at every branch point. Then the number of terminal points on the tree is

$$T = b^{\Omega}$$

However, if the best possible advantage is taken of the α - β heuristic then the number of terminal points that need be examined is

$$\frac{n+1}{T = b^{\frac{n}{2}} + b^{\frac{n-1}{2}} - 1 \quad \text{for odd n}$$

$$\frac{n}{T = 2b^{\frac{n}{2}} - 1} \quad \text{for even n}$$

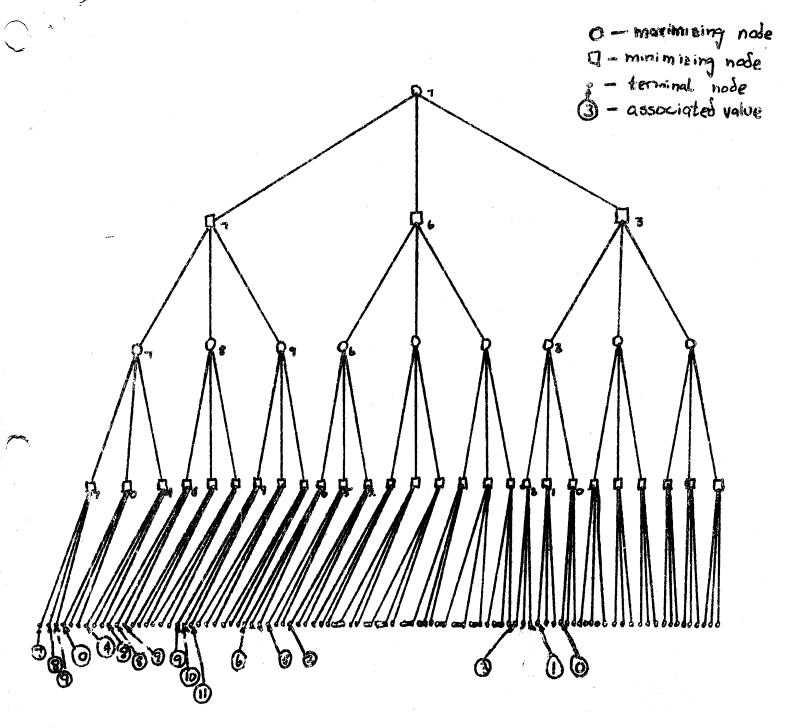

This example shows an ordered ternary tree where only the labelled terminal nodes need be examined. According to the formula for n even where b = 3 and n = 4 only 17 out of the 81 possible nodes need be examined and this is shown to be true in this case. Note that the unlabelled nodes may have any possible value and the result will still be unchanged.

CS-TR Scanning Project Document Control Form

Date : <u>|| | 30 | 95</u>

Report # AIM -30 Each of the following should be identified by a checkmark: Originating Department: Artificial Intellegence Laboratory (AI) ☐ Laboratory for Computer Science (LCS) Document Type: ☐ Technical Report (TR) ☐ Technical Memo (TM) Other: Document Information Number of pages: 5(9) meas Not to include DOD forms, printer intstructions, etc... original pages only. Intended to be printed as: Originals are: Single-sided or Single-sided or □ Double-sided □ Double-sided Print type: Offset Press Typewriter Other: MIMEOGRAPH (FOOR COPY) InkJet Printer Check each if included with document: □ Cover Page ☐ Funding Agent Form ☐ DOD Form ☐ Photo negatives ☐ Printers Notes ☐ Spine ☐ Other: Page Data: Blank Pages(by page number): Photographs/Tonal Material (by page number):_____ Other (note description/page number). Description: Page Number: Scanning Agent Signoff: Date Received: 1130195 Date Scanned: 12112195 Date Returned: 13114195

Scanning Agent Signature: Michael W. Cook Rev 9/94 DS/LCS Document Control Form cestrform.ved

Scanning Agent Identification Target

Scanning of this document was supported in part by the Corporation for National Research Initiatives, using funds from the Advanced Research Projects Agency of the United states Government under Grant: MDA972-92-J1029.

The scanning agent for this project was the **Document Services** department of the **M.I.T Libraries.** Technical support for this project was also provided by the **M.I.T. Laboratory for Computer Sciences.**

